

Преобразователи частоты Eaton

M-Max



2.2 M-MAX - экономичная серия ПЧ до 14 А (7,5 кВт)

Описание продукции	V6-T2-8
Выбор продукции	V6-T2-9

2.3 SVX9000 - серия общепромышленных ПЧ до 300 А (160 кВт)

Обзор продукции	V6-T2-14
SVX9000 - ПЧ IP21	
Описание продукции	V6-T2-17
Выбор продукции	V6-T2-19
SVX9000 - ПЧ IP54	
Описание продукции	V6-T2-52
Выбор продукции	V6-T2-55
SVX9000 - щиты управления для насосных станций	
Описание продукции	V6-T2-78
Выбор продукции	V6-T2-80

SVX9000



2.4 SPX9000 - серия высокоточных ПЧ до 2250 А (2000 кВт)

Описание продукции	V6-T2-98
Выбор продукции	V6-T2-101

2.9 SPA9000/SPN9000/SPI9000 - принадлежности для ПЧ

Описание продукции	V6-T2-239
Выбор продукции	V6-T2-243

SPX9000



ДП «Итон Электрик»

ул. Березняковская, 29, 6 этаж,
г. Киев, 02098, Украина.

Тел.: +38 (044) 496-09-58

Факс: +38 (044) 496-09-54

E-Mail: officeUA@eaton.com

Internet: <http://www.moeller.kiev.ua>

M-Max Series Drives for Machinery Applications

2



Product Description

Eaton's M-Max™ Series Sensorless Vector Adjustable Frequency AC Drives are the next generation of drives specifically engineered for today's machinery applications. These microprocessor-based drives have standard features that can be programmed to tailor the drive's performance to suit a wide variety of application requirements. The M-Max product line uses a 32-bit microprocessor and insulated gate bipolar transistors (IGBTs) that provide quiet motor operation, high motor efficiency, and smooth low-speed performance. The size and simplicity of the M-Max make it ideal for hassle-free installation. Models rated at 575 volts, three-phase, 50/60 Hz are available in sizes ranging from 1 to 7-1/2 hp. Models rated at 480 volts, three-phase, 50/60 Hz are available in sizes ranging from 1/2 to 10 hp. Models rated at 240 volts, single- or three-phase, 50/60 Hz are available in sizes ranging from 1/4 to 3 hp. Models rated at 115 volts, single-phase, 50/60 Hz are available in the 1/4 to 1-1/2 hp size range.

The standard drive includes a digital display, and operating and programming keys on a visually appealing, efficient application programming interface. The display provides drive monitoring, as well as adjustment and diagnostic information. The keys are used for digital adjustment and programming of the drive, as well as for operator control. Separate terminal blocks for control and power wiring are provided for customer connections.

Contents

Description

Page

M-Max Series Adjustable Frequency AC Drive	
Catalog Number Selection	V6-T2-9
Product Selection	V6-T2-9
Accessories	V6-T2-10
Technical Data and Specifications	V6-T2-11
Dimensions	V6-T2-13

Features

- Ease of use—preset application macros, startup wizard, diagnostic capabilities
- Compact, space-saving design
- Rugged and reliable—150% for one minute, 50C rated, conformal coated boards
- DIN rail and screw mountable
- Side-by-side installation
- Industry leading efficiency delivers energy savings to the customer
- Integrated EMC filters make the unit suitable for commercial and industrial networks
- Available in the enclosure class IP20 as standard, options for IP21 and NEMA® 1
- Brake chopper as standard in three-phase, applications of frames 2 (FS2) and larger
- Temperature-controlled fan
- RS-485/Modbus® as standard
- PID controller as standard
- Several fieldbus options

Standards and Certifications

Product

- Complies with EN61800-3 (2004)

Safety^①

- 61800-5-1
- EN60204-1
- CE
- UL
- cUL
- IEC
- RoHS compliant

EMC (At Default Settings)


- EMC Category C2, C3, and C4 (Level H): With an internal RFI filter option

Note

^① See unit nameplate for more detailed approvals.



Catalog Number Selection

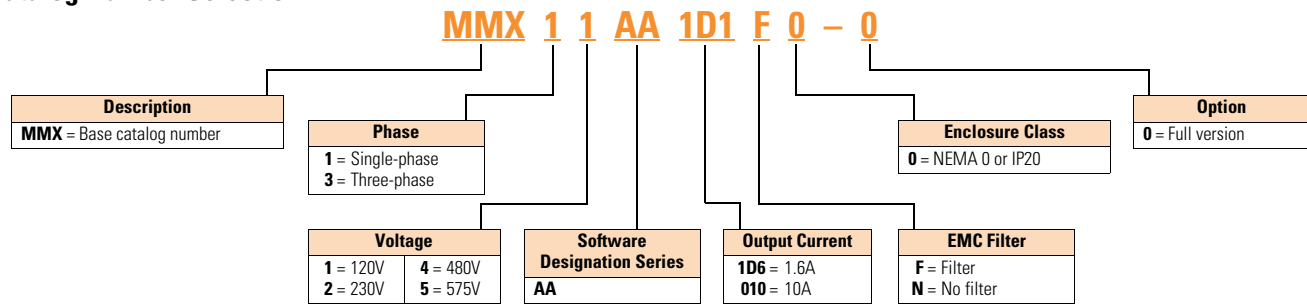

Product Selection

M-Max

M-Max Basic Controller



hp ^①	Volts ^②	100% Continuous Current I _N (A)	Nominal Input Current (A)	Frame Size	Catalog Number
1/4	100–120V single-phase in 230V three-phase out	1.7	9.2	FS2	MMX11AA1D7N0-0 ^③
1/2		2.4	11.6		MMX11AA2D4N0-0 ^③
3/4		2.8	12.4		MMX11AA2D8N0-0 ^③
1		3.7	15		MMX11AA3D7N0-0 ^③
1-1/2	200–240V single-phase in 230V three-phase out	4.8	16.5	FS3	MMX11AA4D8N0-0 ^③
1/4		1.7	4.2	FS1	MMX12AA1D7F0-0
1/2		2.4	5.7		MMX12AA2D4F0-0
3/4		2.8	6.6		MMX12AA2D8F0-0
1		3.7	8.3		MMX12AA3D7F0-0
1-1/2		4.8	11.2	FS2	MMX12AA4D8F0-0
2		7	14.1		MMX12AA7D0F0-0
3		9.6	15.8		MMX12AA9D6F0-0
1/4	200–240V three-phase in 230V three-phase out	1.7	2.7	FS1	MMX32AA1D7N0-0 ^③
1/2		2.4	3.5		MMX32AA2D4N0-0 ^③
3/4		2.8	3.8		MMX32AA2D8N0-0 ^③
1		3.7	4.3		MMX32AA3D7N0-0 ^③
1-1/2		4.8	6.8	FS2	MMX32AA4D8N0-0 ^③
2		7	8.4		MMX32AA7D0N0-0 ^③
3		11	13.4		MMX32AA011N0-0 ^③
1/2	380–480V three-phase in 460V three-phase out	1.3	2.2	FS1	MMX34AA1D3F0-0
3/4		1.9	2.8		MMX34AA1D9F0-0
1		2.4	3.2		MMX34AA2D4F0-0
1-1/2		3.3	4		MMX34AA3D3F0-0
2		4.3	5.6	FS2	MMX34AA4D3F0-0
3		5.6	7.3		MMX34AA5D6F0-0
4		7.6	9.6		MMX34AA7D6F0-0
5		9	11.5		MMX34AA9D0F0-0
7-1/2		12	14.9	FS3	MMX34AA012F0-0
10		14	18.7		MMX34AA014F0-0
1	575V three-phase in 575V three-phase out	1.7	2.0	FS3	MMX35AA1D7N0-0 ^③
2		2.7	3.6		MMX35AA2D7N0-0 ^③
3		3.9	5.0		MMX35AA3D9N0-0 ^③
5		6.1	7.6		MMX35AA6D1N0-0 ^③
7-1/2		9.0	10.4		MMX35AA9D0N0-0 ^③

Notes

^① Horsepower ratings are based on the use of a 240V, 460V, and 575V NEMA B, four- or six-pole squirrel cage induction motor and are for reference only.

Units are to be selected such that the motor current is less than or equal to the MMX rated continuous output current.

^② For 208V, 380V, or 415V applications, select the unit such that the motor current is less than or equal to the MMX rated continuous output current.

^③ For MMX11_, MMX32_, and MMX35_, there are no options for units with filters.

Accessories

M-Max Copy/Paste Module

2

Description	Catalog Number
Module is plugged onto the front of the drive to provide: upload/download of all parameters, direct link to a PC via USB interface for parameter assignment via MaxConnect software, and copying of parameters for a series of devices or when exchanging devices. No PC required	MMX-COM-PC

Kits ^①

Description	Catalog Number
Type 1 and IP21 kit for frame 1	MMX-IP21-FS1
Type 1 and IP21 kit for frame 2	MMX-IP21-FS2
Type 1 and IP21 kit for frame 3	MMX-IP21-FS3

Optional Communication Modules

Description	Catalog Number
Communication adapter kit	MMX-NET-XA
CANopen network card	XXM-NET-CO-A
PROFIBUS DP network card with serial connection	XXM-NET-PS-A
PROFIBUS DP network card with Sub-D connection	XXM-NET-PD-A
DeviceNet network card	XXM-NET-DN-A

Line Reactors ^②

Description	Catalog Number
3% Line Reactor, Single-Phase	
1/2 hp, 240V	K64-000988-8091
1 hp, 240V	K64-000988-0120
2 hp, 240V	K64-000988-0180
3 hp, 240V	K64-000988-0250
3% Line Reactor, Three-Phase	
1/2 hp, 240V	K64-000989-2091
1 hp, 240V	K64-000989-4091
2 hp, 240V	K64-000989-8091
3 hp, 240V	K64-000989-0120
1 hp, 480V	K64-000989-2091
2 hp, 480V	K64-000989-4091
3 hp, 480V	K64-000989-4091
5 hp, 480V	K64-000989-8091
7-1/2 hp, 480V	K64-000989-0180
10 hp, 480V	K64-000989-0250
1 hp, 575V	K64-000989-2091
2 hp, 575V	K64-000989-8091
3 hp, 575V	K64-000989-8091
5 hp, 575V	K64-000989-4091
7-1/2 hp, 575V	K64-000989-0180
10 hp, 575V	K64-000989-0180

Notes

- ① Type 1 kit provides conduit entry plate.
- ② Additional input and output reactors are available. Consult Eaton representative for a complete listing.

Technical Data and Specifications

Ratings

M-Max Basic Controller IP20 Standard Ratings

Description	Specification
Protections	
Overcurrent protection	Trip limit $4.0 \times I_H$ instantaneously
Overvoltage protection	115/230V series: 437 Vdc; 400V series: 874 Vdc; 575V series: 1048 Vdc trip level
Undervoltage protection	115/230V series: 183 Vdc; 400V series: 333 Vdc; 575V series: 460 Vdc trip level
Ground fault protection	Ground fault is tested before every start. In case of ground fault in motor or motor cable, only the frequency converter is protected
Overtemperature protection	Yes
Motor overload protection	Yes
Motor stall protection	Yes
Motor underload protection	Yes

Programmable Parameters

Description
Application macros: basic, pump, fan and high load (hoist)
Programmable start/stop and reverse signal logic (sinking or sourcing)
Reference scaling
Programmable start and stop functions
DC-brake at start and stop
Programmable V/Hz curve
Adjustable switching frequency
Autorestart function after fault
Protections and supervisions (all fully programmable; off, warning, fault)
Current signal input fault
External fault
Fieldbus communication
Eight preset speeds
Analog input range selection, signal scaling and filtering
PID controller
Skip frequencies

Specifications

M-Max Series Drives

Description	Specification
Input Ratings	
Input voltage (V_{in})	+10%/–15% (575V units: +15%/–15%)
Input frequency (f_{in})	50/60 Hz (variation up to 45–66 Hz)
Connection to power	Once per minute or less (typical operation)
Output Ratings	
Output voltage	0 to V_{in} ①
Continuous output current	Continuous rated current I_N at ambient temperature max. 122°F (50°C), overload $1.5 \times I_N$ max. 1 min/10 min
Output frequency	0 to 320 Hz
Frequency resolution	0.01 Hz
Initial output current (I_H)	Current $2 \times I_N$ for 2 seconds in every 20-second period Torque depends on motor
Control Characteristics	
Control method	Frequency control (V/Hz) open loop or sensorless vector control
Switching frequency	1.5 to 16 kHz; default 6 kHz
Frequency reference	Analog input: resolution 0.1% (10-bit), accuracy $\pm 1\%$ V/Hz Panel reference: resolution 0.01 Hz
Field weakening point	30 to 320 Hz
Acceleration time	0 to 3000 sec
Deceleration time	0 to 3000 sec
Braking torque	DC brake: $30\% \times T_N$ (without brake option)
Brake Resistor (Minimum Values) ②	
230V Series	FS2 35 ohms and FS3 26 ohms
400V Series	FS2 75 ohms and FS3 54 ohms
575V Series	FS3 103 ohms
Ambient Conditions	
Ambient operating temperature	14°F (–10°C), no frost to 122°F (+50°C): Rated loadability I_N
Storage temperature	–40°F (–40°C) to 158°F (70°C)
Relative humidity	0 to 95% RH, noncondensing, non-corrosive, no dripping water
Air quality	Chemical vapors: IEC 721-3-3, unit in operation, Class 3C2; Mechanical particles: IEC 721-3-3, unit in operation, Class 3S2
Altitude	100% load capacity (no derating) up to 3280 ft (1000m); 1% derating for each 328 ft (100m) above 3280 ft (1000m); max. 6560 ft (2000m)
Vibration	EN 60068-2-6; 3 to 150 Hz, displacement amplitude 1 mm (peak) at 3 to 15.8 Hz, max. acceleration amplitude 1G at 15.8 to 150 Hz
Shock	EN 50178, IEC 68-2-27 UPS Drop test (for applicable UPS weights); storage and shipping: max. 15G, 11 ms (in package)
Enclosure class	IP20

Notes

① Exception: 115V single-phase in, 230V three-phase out.

② Only three-phase FS2 and FS3 drives are equipped with brake chopper circuit.

Standards

2

I/O Specifications

- Digital inputs DI1–DI6 are freely programmable. The user can assign multiple functions to a single input
- Digital, relay, and analog outputs are freely programmable

Includes:

- Six digital inputs
- Two analog inputs
 - 4–20 mA
 - 0–10V
- One analog output
- One digital output
- Two relay outputs
- RS-485 interface

Reliability

- Pretested components: standard
- Computerized testing: standard
- Final test with full load: standard
- Conformal-coated boards
- 50°C rated
- 150% for one minute/10 mm
- 200% for two seconds/20 sec.
- Eaton Electrical Services and Systems: national network of AF drive specialists

M-Max I/O Interface


	Terminal	Signal	Factory Preset	Description
	1	+10V	Ref. output voltage	Maximum load 10 mA
	2	AI1	Analog signal in 1	Freq. reference ^{P1} 0–+10V Ri = 200k ohms [min.]
	3	GND	I/O signal ground	—
	6	24V	24V output for DIIs	±20%, max. load 50 mA
	7	GND	I/O signal ground	—
	8	DI1	Digital input 1	Start forward ^{P1} 0–+30V Ri = 12k ohms min.
	9	DI2	Digital input 2	Start reverse ^{P1} —
	10	DI3	Digital input 3	Preset speed ^{P1} —
	A	A	RS-485 signal A	FB communication
	B	B	RS-485 signal B	FB communication
	4	AI2	Analog signal in 2	PI actual value ^{P1} 0[4]–20 mA, Ri = 200k ohms
	5	GND	I/O signal ground	—
	13	GND	I/O signal ground	—
	14	DI4	Digital input 4	Preset speed B1 ^{P1} 0–+30V Ri = 12k ohms min.
	15	DI5	Digital input 5	Fault reset ^{P1} 0–+30V Ri = 12k ohms min.
	16	DI6	Digital input 6	Disable PI contr. ^{P1} 0–+30V Ri = 12k ohms min.
	18	AO	Analog output	Output frequency ^{P1} 0[2]–10V, RL = 500 ohms
	20	DO	Digital signal out	Active = READY ^{P1} Open collector, max. load 48V/50 mA
	22	R011	Relay out 1	Active = RUN ^{P1} Max. switching load: 250 Vac/2A or 250 Vdc/0.4A
	23	R012		
	24	R021	Relay out 2	Active = FAULT ^{P1} Max. switching load: 250 Vac/2A or 250 Vdc/0.4A
	25	R022		
	26	R023		

Note^{P1} Parameter-selectable function.

Dimensions


Approximate Dimensions in Inches (mm)

M-Max Drives

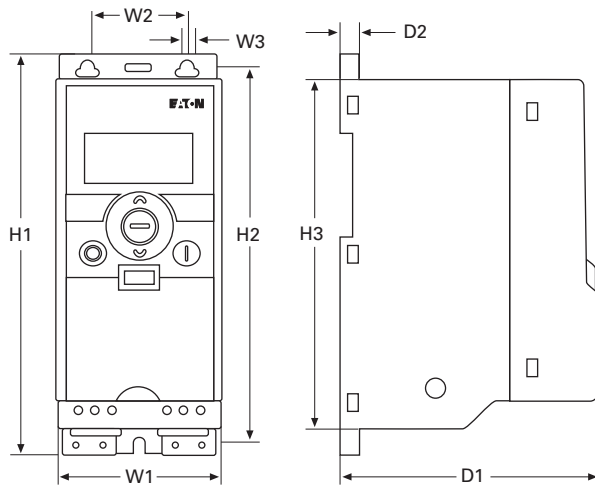

Frame Type	H1	H2	H3	W1	W2	W3	D1	D2	Weight Lbs (kg)
FS1	6.16 (156.5)	5.79 (147.0)	5.40 (137.3)	2.58 (65.5)	1.49 (37.8)	0.17 (4.5)	3.88 (98.5)	0.27 (7.0)	1.213 (0.550)
FS2	7.68 (195.0)	7.20 (183.0)	6.69 (170.0)	3.54 (90.0)	2.46 (62.5)	0.22 (5.5)	4.00 (101.5)	0.27 (7.0)	1.543 (0.699)
FS3	10.33 (262.5)	9.93 (252.3)	9.50 (241.3)	3.94 (100.0)	2.95 (75.0)	0.22 (5.5)	4.27 (108.5)	0.27 (7.0)	2.183 (0.990)


NEMA 1/IP21 M-Max Drives and Communication Adapter Kit

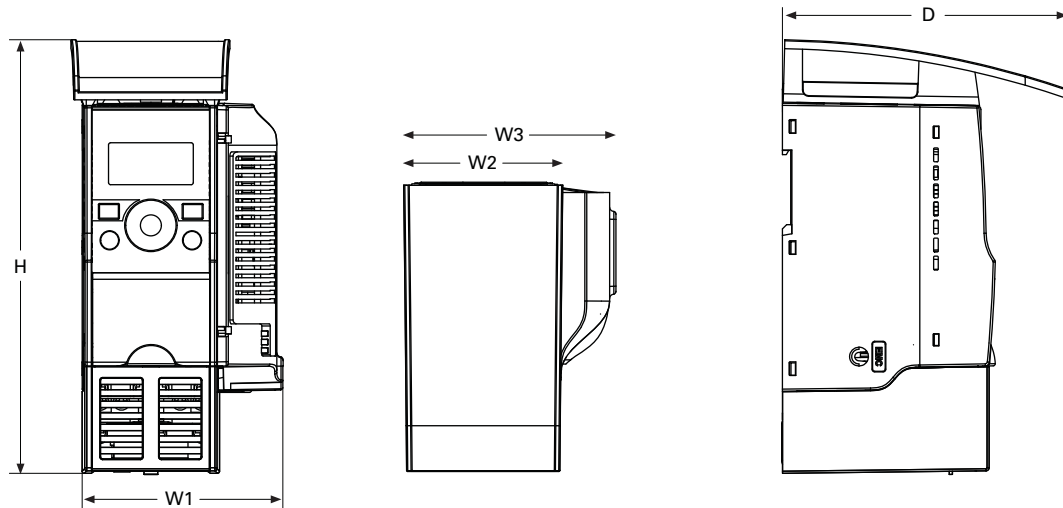

Frame Type	H	W1	W2	W3	D
FS1	8.14 (206.7)	3.77 (95.7)	2.99 (75.9)	3.98 (101.2)	5.41 (137.5)
FS2	9.90 (251.5)	4.72 (120.0)	3.97 (100.8)	4.94 (125.5)	5.68 (144.2)
FS3	12.26 (311.5)	5.12 (130.1)	4.36 (110.8)	5.33 (135.3)	6.32 (160.5)

SVX9000 Drives

2

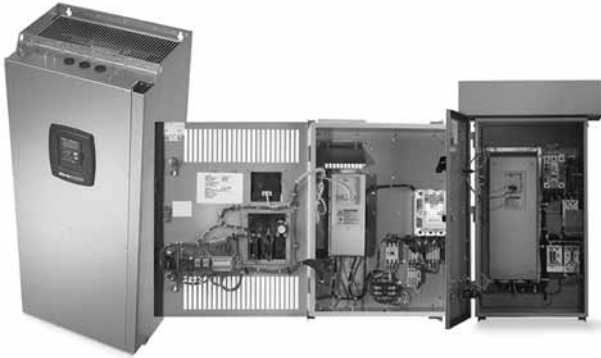

Contents

Description

Page

SVX9000 Drives

SVX9000 Open Drives **V6-T2-17**SVX9000 Enclosed Drives **V6-T2-52**SVX9000 VFD Pump Panels **V6-T2-78**

Product Overview

With the SVX9000 Series Sensorless Vector Control, Eaton's expanded Eaton drive offering now covers a complete line of PWM adjustable frequency (speed) drives in ratings from:

- 208V—3/4 to 100 hp I_H ; 1 to 100 hp I_L
- 230V—3/4 to 100 hp I_H ; 1 to 125 hp I_L
- 480V—1 to 1900 hp I_H ; 1-1/2 to 2200 hp I_L
- 575V—2 to 2000 hp I_H ; 3 to 2300 hp I_L

The Eaton family of drives includes HVX9000, H-Max, M-Max, SVX9000, SLX9000 and SPX9000. 9000X Series drive ratings are rated for either high overload (I_H) or low overload (I_L). I_L indicates 110% overload capacity for 1 minute out of 10 minutes. I_H indicates 150% overload capacity for 1 minute out of 10 minutes.

A full range of enclosure types and options are available to meet a wide array of applications—from simple variable torque to more complex industrial applications such as conveyors, mixers and machine controls.

Application Description

Application Engineering

Proper selection and application of all drive system components is essential to assure that an adjustable frequency drive system will safely and reliably provide the performance required for any given application. The party responsible for the overall design and operation of the facility must make sure that qualified personnel are employed to select all components of the drive system, including appropriate safety devices. Eaton's AF Drives Application Engineering Department is prepared to provide assistance to answer any questions about the technical capabilities of Eaton drives.

Motor Selection

The basic requirement of motor selection is to match the torque vs. speed capability of the motor to the torque vs. speed requirement of the driven load.

Motor Torque vs. Speed Capability

As the speed of a motor is reduced below its 60 Hz base speed, motor cooling becomes less effective because of the reduced speed of the self-cooling fan. This limitation determines the maximum torque for continuous operation at any operating speed. The maximum intermittent operating torque is determined by the motor's torque vs. current characteristics and the output current capability of the adjustable frequency controller.

Multiple Motor Operation

A number of motors can be connected in parallel to a single controller. Since the frequency of the power supplied by the controller is the same for each motor, the motors will always operate at the same speed. Application Engineering assistance must be requested for all multiple motor applications to assure compliance with all controller design limitations.

Special Types of Motors

Standard NEMA Designs A and B three-phase motors are the only motors recommended for use in the majority of applications, but other types of motors are occasionally used. If the existing motor used in the application or the motor proposed for use with the drive system is a type other than NEMA Design A or B, Application Engineering assistance must be requested to make certain that the drive is properly applied.

Product Selection Guide

Controller Selection

The basic requirement of controller selection is to match the output current, voltage and frequency capabilities of the controller with the requirements of the connected motor.

Output Current

The controller must be selected and applied such that the average operating motor current and horsepower do not exceed the continuous current and horsepower ratings of the controller. The intermittent operating current must not exceed the intermittent current rating of the controller.

Motor Protection

Eaton adjustable frequency drives include electronic motor overload protection circuits that are designed to meet the requirements of NEC article 430-2 provided that only one motor is connected to the output of the controller.

Output Voltage and Frequency

When they are shipped, AF controllers are adjusted to provide a maximum output voltage and frequency equivalent to the input line voltage and frequency. The controllers can be adjusted to operate above line frequency, but a hazard of personal injury or equipment damage may exist when the motor is operated above base speed. Before adjusting the drive to operate above line frequency, make sure that the motor and the driven machinery can safely be operated at the resulting speed.

Features

Controller Features

Operator Control and Interface Requirements

Since there are many possible configurations and many ways of achieving a specific end result, it pays to consider the operator control and interface requirements carefully. A simplified and more economical drive package can often be achieved by selecting from standard product offerings rather than specifying a custom designed configuration.

Installation Compatibility

The successful application of an AC drive requires the assurance that the drive will be compatible with the environment in which it will be installed. In planning the installation, be sure to carefully consider the heat produced by the drive, the altitude and temperature limits and the need for clean cooling air. Other important considerations include acoustical noise, vibration, electromagnetic compatibility, power quality, controller input harmonic current and power distribution equipment requirements.

Auxiliary Equipment and Accessories

Adjustable drives are generally designed to have a motor directly connected to the controller output terminals with no other equipment connected in series or parallel. Motor starters, disconnect switches, surge absorbers, DV/DT suppression circuits, output chokes, output transformers and any other equipment under consideration for installation on the output of the controller should not be installed without first requesting Application Engineering assistance. Power factor correction capacitors must never, under any circumstances, be connected at the output of the controller. They would serve no useful purpose, and they may damage the controller.

Enclosure Definitions

- **NEMA Type 1/IP21**—Enclosures are intended for indoor use primarily to provide a degree of protection against contact with enclosed equipment and provide a degree of protection against a limited amount of falling dirt in locations where unusual service conditions do not exist. Top or side openings in the NEMA Type 1/IP21 enclosure allow for the free exchange of inside and outside air while meeting the UL rod entry and rust resistance design tests.
- **NEMA Type 12/IP54**—Enclosures are intended for indoor use primarily to provide a degree of protection against circulating dust, falling dirt and dripping noncorrosive liquids. To meet UL drip, dust and rust resistance tests, NEMA Type 12/IP54 enclosures have no openings to allow for the exchange of inside and outside air.
- **Chassis IP00**—Similar to Protected Chassis IP20 except power terminals are protected by plastic shielding only. Primarily intended to be mounted inside a surrounding protective enclosure.
- **NEMA Type 3R**—Similar in design to NEMA Type 12/IP54 except with more stringent design and test requirements.

Motor Protection

DV/DT and Peak Motor Voltage Solutions

2

Today's AFD products offer significantly improved performance, but at the potential cost of motor insulation stress. The fast switching time of the IGBT devices used in newer AFDs can cause a transmission line effect in the output power leads to the motor, leading to possibly damaging voltage levels. To meet this need,

NEMA has introduced a motor in MG1, Part 31, which provides an insulation system designed to maintain normal motor life in AFD applications. For existing motors, a motor protection scheme is required for longer cable runs. Eaton offers three standard solutions for existing systems.

- **MotoRx** This solution provides an energy recovery system which clamps the peak motor voltage to a safe level for standard motors. This option is used when the distance between a single motor and the drive is 600 ft or less.

- **Output Line Reactor** This option provides an output line reactor, reducing the DV/DT of the AFD output voltage and lessening the transmission line effect, to lower the peak voltage at the motor terminals.

Product Availability Codes

The product availability codes indicate the type of facility (warehouse, Mod Center or factory) that the product will ship from and, if it is not in stock, the number of working days needed to assemble the

product from receipt of the order to shipment from the designated facility. Please note that this lead-time does not include any in-transit time from our facility to your facility.

Product Availability Codes

Code	Description
W	Warehouse stocked item. Shipped on customer request date. If item is backordered, please check Vista/VISTALINE or contact your Customer Support Center for product availability.
F1	Factory assemble-to-order. Shipped from factory within 1 working day after receipt of order on Vista.
FA	Factory assemble-to-order. Shipped from factory within 2–3 working days after receipt of order on Vista.
FB	Factory assemble-to-order. Shipped from factory within 4–10 working days after receipt of order on Vista.
FC	Factory assemble-to-order. Shipped from factory within 11–15 working days after receipt of order on Vista.
FD	Factory assemble-to-order. Shipped from factory within 16–20 working days after receipt of order on Vista.
FP	Factory assemble-to-order. Shipped from factory on negotiated promise date.
MA	Mod Center assemble-to-order. Shipped from Mod Center within 1–3 working days after receipt of order on Vista.
MB	Mod Center assemble-to-order. Shipped from Mod Center within 4–10 working days after receipt of order on Vista.
MP	Mod Center assemble-to-order. Shipped from Mod Center on negotiated promise date.

Product availability codes contained herein for a given product may be quantity sensitive and are subject to change without notice.

For the most current information, refer to the Product Identification Inquiry (PIN) screen on Vista.

SVX9000 Open Drives



Contents

Description

Page

SVX9000 Open Drives	
Standards and Certifications	V6-T2-18
Catalog Number Selection	V6-T2-18
Product Selection	V6-T2-19
Accessories	V6-T2-23
Options	V6-T2-24
Replacement Parts	V6-T2-27
Technical Data and Specifications	V6-T2-34
Dimensions	V6-T2-35
SVX9000 Enclosed Drives	V6-T2-52
SVX9000 VFD Pump Panels	V6-T2-78

SVX9000 Open Drives

Product Description

SVX9000 Series Adjustable Frequency Drives from Eaton's electrical sector are the next generation of drives specifically engineered for today's commercial and industrial applications. The power unit makes use of the most sophisticated semiconductor technology and a highly modular construction that can be flexibly adapted to the customer's needs.

The input and output configuration (I/O) is designed with modularity in mind. The I/O is compromised of option cards, each with its own input and output configuration. The control module is designed to accept a total of five of these cards. The cards contain not only normal analog and digital inputs but also fieldbus cards.

These drives continue the tradition of robust performance, and raise the bar on features and functionality, ensuring the best solution at the right price.

Features

- Robust design—proven 500,000 hours MTBF
- Integrated 3% line reactors standard on drives from FR4 through FR9
- EMI/RFI Filters H standard up to 200 hp I_H 480V, 100 hp I_H 230V
- Simplified operating menu allows for typical programming changes, while programming mode provides control of everything
- Quick Start Wizard built into the programming of the drive ensures a smooth start-up
- Keypad can display up to three monitored parameters simultaneously
- LOCAL/REMOTE operation from keypad
- Copy/paste function allows transfer of parameter settings from one drive to the next
- Standard NEMA Type 12/ IP54 keypad on all drives
- The SVX can be flexibly adapted to a variety of needs using our pre-installed "Seven in One" precision application programs consisting of:
 - Basic
 - Standard
 - Local/remote
 - Multi step speed control
 - PID control
 - Multi-purpose control
 - Pump and fan control with auto change
- Additional I/O and communication cards provide plug and play functionality
- I/O connections with simple quick connection terminals
- Hand-held auxiliary 24V power supply allows programming/monitoring of control module without applying full power to the drive
- Control logic can be powered from an external auxiliary control panel, internal drive functions and fieldbus if necessary
- Brake chopper standard from: 1–30 hp/380–500V 3/4–15 hp/208–230V
- NEMA Type 1/IP21 and NEMA Type 12/IP54 enclosures available, Frame Sizes FR4–FR9
- Open chassis FR10 and greater
- Standard option board configuration includes an A9 I/O board and an A2 relay output board installed in slots A and B

2.3

Adjustable Frequency Drives

SVX9000 Drives

Standards and Certifications

Product

- IEC 61800-2

EMC (At Default Settings)

- Immunity: Fulfills all EMC immunity requirements;
- Emissions: EN 61800-3, LEVEL H


Safety

- UL 508C




Catalog Number Selection

SVX9000 Adjustable Frequency Drives

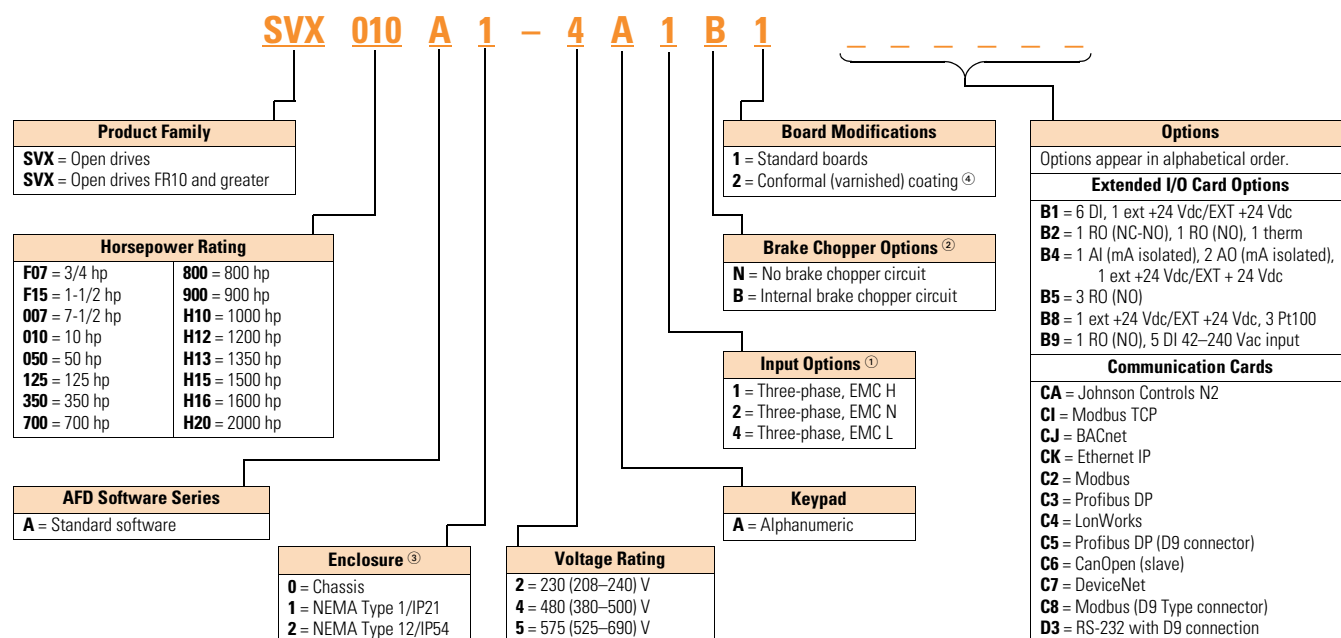

Power Module

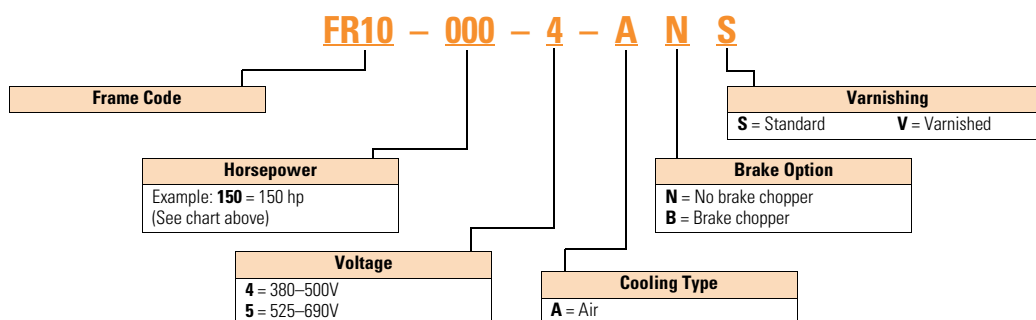

Notes

- All 230V drives and 480V drives up to 200 hp (IH) are only available with input option 1 (EMC Level H). 480V drives 250 hp (IH) or larger are available with input option 2 (EMC Level N). 480V drives are available with input option 4 (EMC Level L). 575V drives 200 hp (IH) or larger are only available with input option 2. 575V drives up to 150 hp (IH) are only available with input option 4 (EMC Level L).
- 480V drives up to 30 hp (IH) are only available with brake chopper option B. 480V drives 40 hp (IH) or larger come standard with brake chopper option N. 230V drives up to 15 hp (IH) are only available with brake chopper option B. 230V drives 20 hp or larger come standard with brake chopper option N. All 575V drives come standard without brake chopper option (N). N = No brake chopper.
- 480V drives 250 hp (I_h) and larger are available with enclosure style 0 (chassis); 690V drives 200 hp (I_h) and larger are available with enclosure style 0 (chassis).
- Factory promise delivery. Consult sales office for availability.

Product Selection

230V SVX9000 Drives

SVX9000 Open Drives



208–240V, NEMA Type 1/IP21 Drives

Frame Size	Delivery Code	hp (I _H)	Current (I _H)	hp (I _L)	Current (I _L)	Catalog Number
FR4	W	3/4	3.7	1	4.8	SVXF07A1-2A1B1
		1	4.8	1-1/2	6.6	SVX001A1-2A1B1
		1-1/2	6.6	2	7.8	SVXF15A1-2A1B1
		2	7.8	3	11	SVX002A1-2A1B1
		3	11	—	12.5	SVX003A1-2A1B1
FR5	W	—	12.5	5	17.5	SVX004A1-2A1B1
		5	17.5	7-1/2	25	SVX005A1-2A1B1
		7-1/2	25	10	31	SVX007A1-2A1B1
FR6	W	10	31	15	48	SVX010A1-2A1B1
		15	48	20	61	SVX015A1-2A1B1
FR7	W	20	61	25	75	SVX020A1-2A1N1
		25	75	30	88	SVX025A1-2A1N1
		30	88	40	114	SVX030A1-2A1N1
FR8	W	40	114	50	140	SVX040A1-2A1N1
		50	140	60	170	SVX050A1-2A1N1
		60	170	75	205	SVX060A1-2A1N1
FR9	W	75	205	100	261	SVX075A1-2A1N1
		100	261	125	300	SVX100A1-2A1N1

208–240V, NEMA Type 12/IP54 Drives

Frame Size	Delivery Code	hp (I _H)	Current (I _H)	hp (I _L)	Current (I _L)	Catalog Number
FR4	F1	3/4	3.7	1	4.8	SVXF07A2-2A1B1
		1	4.8	1-1/2	6.6	SVX001A2-2A1B1
		1-1/2	6.6	2	7.8	SVXF15A2-2A1B1
		2	7.8	3	11	SVX002A2-2A1B1
		3	11	—	12.5	SVX003A2-2A1B1
FR5	F1	—	12.5	5	17.5	SVX004A2-2A1B1
		5	17.5	7-1/2	25	SVX005A2-2A1B1
		7-1/2	25	10	31	SVX007A2-2A1B1
FR6	F1	10	31	15	48	SVX010A2-2A1B1
		15	48	20	61	SVX015A2-2A1B1
FR7	W	20	61	25	75	SVX020A2-2A1N1
		25	75	30	88	SVX025A2-2A1N1
		30	88	40	114	SVX030A2-2A1N1
FR8	FP	40	114	50	140	SVX040A2-2A1N1
		50	140	60	170	SVX050A2-2A1N1
		60	170	75	205	SVX060A2-2A1N1
FR9	FP	75	205	100	261	SVX075A2-2A1N1
		100	261	125	300	SVX100A2-2A1N1

480V SVX9000 Drives

2

SVX9000 Open Drives



380–500V, NEMA Type 1/IP21 Drives

Frame Size	Delivery Code	hp (I _H)	Current (I _H)	hp (I _L)	Current (I _L)	Catalog Number
FR4	W	1	2.2	1-1/2	3.3	SVX001A1-4A1B1
		1-1/2	3.3	2	4.3	SVXF15A1-4A1B1
		2	4.3	3	5.6	SVX002A1-4A1B1
		3	5.6	5	7.6	SVX003A1-4A1B1
		5	7.6	—	9	SVX005A1-4A1B1
		—	9	7-1/2	12	SVX006A1-4A1B1
FR5	W	7-1/2	12	10	16	SVX007A1-4A1B1
		10	16	15	23	SVX010A1-4A1B1
		15	23	20	31	SVX015A1-4A1B1
FR6	W	20	31	25	38	SVX020A1-4A1B1
		25	38	30	46	SVX025A1-4A1B1
		30	46	40	61	SVX030A1-4A1B1
FR7	W	40	61	50	72	SVX040A1-4A1N1
		50	72	60	87	SVX050A1-4A1N1
		60	87	75	105	SVX060A1-4A1N1
FR8	W	75	105	100	140	SVX075A1-4A1N1
		100	140	125	170	SVX100A1-4A1N1
		125	170	150	205	SVX125A1-4A1N1
FR9	W	150	205	200	261	SVX150A1-4A1N1
		200	245	250	300	SVX200A1-4A1N1

380–500V, NEMA Type 12/IP54 Drives

Frame Size	Delivery Code	hp (I _H)	Current (I _H)	hp (I _L)	Current (I _L)	Catalog Number
FR4	F1	1	2.2	1-1/2	3.3	SVX001A2-4A1B1
		1-1/2	3.3	2	4.3	SVXF15A2-4A1B1
		2	4.3	3	5.6	SVX002A2-4A1B1
		3	5.6	5	7.6	SVX003A2-4A1B1
		5	7.6	—	9	SVX005A2-4A1B1
		—	9	7-1/2	12	SVX006A2-4A1B1
FR5	F1	7-1/2	12	10	16	SVX007A2-4A1B1
		10	16	15	23	SVX010A2-4A1B1
		15	23	20	31	SVX015A2-4A1B1
FR6	F1	20	31	25	38	SVX020A2-4A1B1
		25	38	30	46	SVX025A2-4A1B1
		30	46	40	61	SVX030A2-4A1B1
FR7	W	40	61	50	72	SVX040A2-4A1N1
		50	72	60	87	SVX050A2-4A1N1
		60	87	75	105	SVX060A2-4A1N1
FR8	W	75	105	100	140	SVX075A2-4A1N1
		100	140	125	170	SVX100A2-4A1N1
		125	170	150	205	SVX125A2-4A1N1
FR9	W	150	205	200	261	SVX150A2-4A1N1
		200	245	250	300	SVX200A2-4A1N1

SVX9000 Open Drives



380–500V, Open Chassis Drives

Frame Size	Delivery Code	hp (I _H)	Current (I _H)	hp (I _L)	Current (I _L)	Catalog Number
FR10 ①	W	250	330	300	385	SPX250A0-4A2N1
		300	385	350	460	SPX300A0-4A2N1
		350	460	400	520	SPX350A0-4A2N1
FR11	W	400	520	500	590	SPX400A0-4A2N1
		500	590	—	650	SPX500A0-4A2N1
		—	650	600	730	SPX550A0-4A2N1
FR12	FP	600	730	—	820	SPX600A0-4A2N1
	W	—	820	700	920	SPX650A0-4A2N1
	FP	700	920	800	1030	SPX700A0-4A2N1
FR13	FP	800	1030	900	1150	SPX800A0-4A2N1
		900	1150	1000	1300	SPX900A0-4A2N1
		1000	1300	1200	1450	SPXH10A0-4A2N1
FR14	FP	1200	1600	1500	1770	SPXH12A0-4A2N1
		1600	1940	1800	2150	SPXH16A0-4A2N1
		1900	2300	2200	2700	SPXH19A0-4A2N1

575V SVX9000 Drives

525–690V, NEMA Type 1/IP21 Drives

Frame Size	Delivery Code	hp (I _H)	Current (I _H)	hp (I _L)	Current (I _L)	Catalog Number
FR6	W	2	3.3	3	4.5	SVX002A1-5A4N1
		3	4.5	—	5.5	SVX003A1-5A4N1
		—	5.5	5	7.5	SVX004A1-5A4N1
		5	7.5	7-1/2	10	SVX005A1-5A4N1
		7-1/2	10	10	13.5	SVX007A1-5A4N1
		10	13.5	15	18	SVX010A1-5A4N1
		15	18	20	22	SVX015A1-5A4N1
		20	22	25	27	SVX020A1-5A4N1
		25	27	30	34	SVX025A1-5A4N1
FR7	W	30	34	40	41	SVX030A1-5A4N1
		40	41	50	52	SVX040A1-5A4N1
FR8	W	50	52	60	62	SVX050A1-5A4N1
		60	62	75	80	SVX060A1-5A4N1
		75	80	100	100	SVX075A1-5A4N1
FR9	W	100	100	125	125	SVX100A1-5A4N1
		125	125	150	144	SVX125A1-5A4N1
		150	144	—	170	SVX150A1-5A4N1
		—	170	200	208	SVX175A1-5A4N1

Note

① FR10–FR14 includes 3% line reactor, but it is not integral to chassis.

SVX9000 Open Drives

525–690V, NEMA Type 12/IP54 Drives

2



Frame Size	Delivery Code	hp (I _H)	Current (I _H)	hp (I _L)	Current (I _L)	Catalog Number
FR6	F1	2	3.3	3	4.5	SVX002A2-5A4N1
		3	4.5	—	5.5	SVX003A2-5A4N1
		—	5.5	5	7.5	SVX004A2-5A4N1
		5	7.5	7-1/2	10	SVX005A2-5A4N1
		7-1/2	10	10	13.5	SVX007A2-5A4N1
		10	13.5	15	18	SVX010A2-5A4N1
		15	18	20	22	SVX015A2-5A4N1
		20	22	25	27	SVX020A2-5A4N1
FR7	FP	25	27	30	34	SVX025A2-5A4N1
		30	34	40	41	SVX030A2-5A4N1
FR8	FP	40	41	50	52	SVX040A2-5A4N1
		50	52	60	62	SVX050A2-5A4N1
FR9	FP	60	62	75	80	SVX060A2-5A4N1
		75	80	100	100	SVX075A2-5A4N1
		100	100	125	125	SVX100A2-5A4N1
FR9	FP	125	125	150	144	SVX125A2-5A4N1
		150	144	—	170	SVX150A2-5A4N1
		—	170	200	208	SVX175A2-5A4N1

525–690V, Open Chassis Drives

Frame Size	Delivery Code	hp (I _H)	Current (I _H)	hp (I _L)	Current (I _L)	Catalog Number
FR10	FP	200	208	250	261	SPX200A0-5A2N1
		250	261	300	325	SPX250A0-5A2N1
		300	325	400	385	SPX300A0-5A2N1
FR11	FP	400	385	450	460	SPX400A0-5A2N1
		450	460	500	502	SPX450A0-5A2N1
		500	502	—	590	SPX500A0-5A2N1
FR12	FP	—	590	600	650	SPX550A0-5A2N1
		600	650	700	750	SPX600A0-5A2N1
		700	750	800	820	SPX700A0-5A2N1
FR13	FP	800	820	900	920	SPX800A0-5A2N1
		900	920	1000	1030	SPX900A0-5A2N1
		1000	1030	1250	1180	SPXH10A0-5A2N1
FR14	FP	1350	1300	1500	1500	SPXH13A0-5A2N1
		1500	1500	2000	1900	SPXH15A0-5A2N1
		2000	1900	2300	2250	SPXH20A0-5A2N1

Accessories

Demo Drive and Power Supply

Demo Drive and Power Supply

Description	Catalog Number
9000X demo drive	9000XDEMO
Hand-held 24V auxiliary power supply—Used to supply power to the control module in order to perform keypad programming before the drive is connected to line voltage	9000XAUX24V

NEMA Type 12/IP54 Conversion Kit

The NEMA Type 12/IP54 kit option is used to convert a NEMA Type 1/IP21 to a NEMA Type 12/IP54 drive. The NEMA Type 12/IP54 kit consists of a metal drive shroud, fan kit for some frames, adaptor plate and plugs.

NEMA Type 12/IP54 Conversion Kit

Frame Size	Delivery Code	Approximate Dimensions in Inches (mm)			Approximate Weight Lb (kg)	Catalog Number
		Length	Width	Height		
FR4	W	13 (330)	7 (178)	4 (102)	4 (1.8)	OPTN12FR4
FR5		16 (406)	8 (203)	7 (178)	5 (2.3)	OPTN12FR5
FR6		21 (533)	10 (254)	5 (127)	7 (3.2)	OPTN12FR6

Flange Kits

Flange Kit NEMA Type 12/IP54

The flange kit is utilized when the power section is mounted through the back panel of an enclosure. Includes flange mount brackets and NEMA Type 12/IP54 fan components. Metal shroud not included.

Flange kits for NEMA Type 12/IP54 enclosure drive rating are determined by rating of drive.

Flange Kit NEMA Type 12/IP54— Frames 4, 5 and 6 ^①

Frame Size	Delivery Code	Catalog Number
FR4	W	OPTTHRFR4
FR5		OPTTHRFR5
FR6		OPTTHRFR6

Flange Kit NEMA Type 12/IP54— Frames 4–9 ^①

Frame Size	Delivery Code	Catalog Number
FR4	FP	OPTTHR4
FR5		OPTTHR5
FR6		OPTTHR6
FR7		OPTTHR7
FR8		OPTTHR8
FR9		OPTTHR9

Flange Kit NEMA Type 1/IP21

Flange kits for NEMA Type 1/IP21 enclosure drive rating are determined by rating of drive.

Flange Kit NEMA Type 1/IP21— Frames 4–9 ^①

Frame Size	Delivery Code	Catalog Number
FR4	FP	OPTTHR4
FR5		OPTTHR5
FR6		OPTTHR6
FR7		OPTTHR7
FR8		OPTTHR8
FR9		OPTTHR9

Note

^① For installation of an SVX9000 NEMA Type 1/IP21 drive into a NEMA Type 12/IP54 oversized enclosure.

Options

9000X Series Option Board Kits


2

The 9000X Series drives can accommodate a wide selection of expander and adapter option boards to customize the drive for your application needs. The drive's control unit is designed to accept a total of five option boards.

The 9000X Series factory installed standard board configuration includes an A9 I/O board and an A2 relay output board, which are installed in slots A and B.

Option Boards

Option Board Kits



Option Kit Description ①	Allowed Slot Locations ②	Field Installed Catalog Number	Factory Installed Option Designator	SVX Ready Programs						
				Basic	Local/ Remote	Standard	MSS	PID	Multi-P.	PFC
Standard I/O Cards										
2 RO (NC-NO)	B	OPTA2	—	■	■	■	■	■	■	■
6 DI, 1 DO, 2 AI, 1AO, 1 +10 Vdc ref, 2 ext +24 Vdc/EXT +24 Vdc	A	OPTA9	—	■	■	■	■	■	■	■
Extended I/O Cards										
2 RO, therm—SPX only	B	OPTA3	A3	—	■	■	■	■	■	■
Encoder low volt +5V/15V/24V—SPX only	C	OPTA4	A4	—	■	■	■	■	■	■
Encoder high volt +15V/24V—SPX only	C	OPTA5	A5	—	■	■	■	■	■	■
Double encoder—SPX only	C	OPTA7	A7	■	■	■	■	■	■	■
6 DI, 1 DO, 2 AI, 1 AO—SPX only	A	OPTA8	A8	—	■	■	■	■	■	■
3 DI (encoder 10–24V), out +15V/+24V, 2 DO (pulse+direction)—SPX only	C	OPTAE	AE	■	■	■	■	■	■	■
6 DI, 1 ext +24 Vdc/EXT +24 Vdc	B, C, D, E	OPTB1	B1	—	—	—	—	—	■	■
1 RO (NC-NO), 1 RO (NO), 1 therm	B, C, D, E	OPTB2	B2	—	—	—	—	—	■	■
1 AI (mA isolated), 2 AO (mA isolated), 1 ext +24 Vdc/EXT +24 Vdc	B, C, D, E	OPTB4	B4	■	■	■	■	■	■	■
3 RO (NO)	B, C, D, E	OPTB5	B5	—	—	—	—	—	■	■
1 ext +24 Vdc/EXT +24 Vdc, 3 Pt100	B, C, D, E	OPTB8	B8	—	—	—	—	—	—	—
1 RO (NO), 5 DI 42–240 Vac input	B, C, D, E	OPTB9	B9	—	—	—	—	—	■	■
Communication Cards										
Modbus ③	D, E	OPTC2	C2	■	■	■	■	■	■	■
Johnson Controls N2 ③	D, E	OPTC2	CA	—	—	—	—	—	—	—
Modbus TCP	D, E	OPTCI	CI	■	■	■	■	■	■	■
BACnet	D, E	OPTCJ	CJ	■	■	■	■	■	■	■
Ethernet IP	D, E	OPTCK	CK	■	■	■	■	■	■	■
Profibus DP	D, E	OPTC3	C3	■	■	■	■	■	■	■
LonWorks	D, E	OPTC4	C4	■	■	■	■	■	■	■
Profibus DP (D9 connector)	D, E	OPTC5	C5	■	■	■	■	■	■	■
CanOpen (slave) ④	D, E	OPTC6	C6	■	■	■	■	■	■	■
DeviceNet	D, E	OPTC7	C7	■	■	■	■	■	■	■
Modbus (D9 type connector)	D, E	OPTC8	C8	■	■	■	■	■	■	■
Adapter—SPX only	D, E	OPTD1	D1	■	■	■	■	■	■	■
Adapter—SPX only	D, E	OPTD2	D2	■	■	■	■	■	■	■
RS-232 with D9 connection	D, E	OPTD3	D3	■	■	■	■	■	■	■
Keypad										
9000X Series local/remote keypad (replacement keypad)	—	KEYPAD-LOC/REM	—	—	—	—	—	—	—	—
9000X Series remote mount keypad unit (keypad not included, includes 10 ft cable, keypad holder, mounting hardware)	—	OPTRMT-KIT-9000X	—	—	—	—	—	—	—	—
9000X Series RS-232 cable, 13 ft	—	PP00104	—	—	—	—	—	—	—	—

Notes

① AI = Analog Input; AO = Analog Output, DI = Digital Input, DO = Digital Output, RO = Relay Output

② Option card must be installed in one of the slots listed for that card. Slot indicated in bold is the preferred location.

③ OPTC2 is a multi-protocol option card.

④ SPX9000 drives only (FR10 and larger).

Modbus RTU Network Communications

The Modbus Network Card OPTC2 is used for connecting the 9000X Drive as a slave on a Modbus network. The interface is connected by a 9-pin DSUB connector (female) and the baud rate ranges from 300 to 19200 baud. Other communication parameters include an address range from 1 to 247; a parity of None, Odd or Even; and the stop bit is 1.

Profibus Network Communications

The Profibus Network Card OPTC3 is used for connecting the 9000X Drive as a slave on a Profibus-DP network. The interface is connected by a 9-pin DSUB connector (female). The baud rates range from 9.6K baud to 12M baud, and the addresses range from 1 to 127.

LonWorks Network Communications

The LonWorks Network Card OPTC4 is used for connecting the 9000X Drive on a LonWorks network. This interface uses Standard Network Variable Types (SNVT) as data types. The channel connection is achieved using a FTT-10A Free Topology transceiver via a single twisted transfer cable. The communication speed with LonWorks is 78 kBits/s.

CanOpen (Slave) Communications

The CanOpen (Slave) Network Card OPTC6 is used for connecting the 9000X Drive to a host system. According to ISO11898 standard cables to be chosen for CAN bus should have a nominal impedance of 120 ohms, and specific line delay of nominal 5 nS/m. 120 ohms line termination resistors required for installation.

DeviceNet Network Communications

The DeviceNet Network Card OPTC7 is used for connecting the 9000X Drive on a DeviceNet Network. It includes a 5.08 mm pluggable connector. Transfer method is via CAN using a two-wire twisted shielded cable with two-wire bus power cable and drain. The baud rates used for communication include 125K baud, 250K baud and 500K baud.

Johnson Controls Metasys N2 Network Communications

The OPTC2 fieldbus board provides communication between the 9000X Drive and a Johnson Controls Metasys™ N2 network. With this connection, the drive can be controlled, monitored and programmed from the Metasys system. The N2 fieldbus is available as a factory installed option and as a field installable kit.

Modbus/TCP Network Communications

The Modbus/TCP Network Card OPTC1 is used for connecting the 9000X Drive to Ethernet networks utilizing Modbus protocol. It includes an RJ-45 pluggable connector. This interface provides a selection of standard and custom register values to communicate drive parameters. The board supports 10 Mbps and 100 Mbps communication speeds. The IP address of the board is configurable over Ethernet using a supplied software tool.

BACnet Network Communications

The BACnet Network Card OPTCJ is used for connecting the 9000X Drive to BACnet networks. It includes a 5.08 mm pluggable connector. Data transfer is Master-Slave/Token Passing (MS/TP) RS-485. This interface uses a collection of 30 Binary Value Objects (BVOs) and 35 Analog Value Objects (AVOs) to communicate drive parameters. The card supports 9.6, 19.2 and 38.4 Kbaud communication speeds and supports network addresses 1–127.

Ethernet/IP Network Communications

The Ethernet/IP Network Card OPTCK is used for connecting the 9000X Drive to Ethernet/Industrial Protocol networks. It includes an RJ-45 pluggable connector. The interface uses CIP objects to communicate drive parameters (CIP is "Common Industrial Protocol", the same protocol used by DeviceNet). The board supports 10 Mbps and 100 Mbps communication speeds. The IP address of the board is configurable by Static, BOOTP and DHCP methods.

Control Panel Options**Factory Options**

2

Description	Factory Installed Option Code	Field Installed NEMA Type 1/IP21 Catalog Number
Local/Remote Keypad SVX9000 Control Panel —This option is standard on all drives and consists of an RS-232 connection, backlit alphanumeric LCD display with nine indicators for the RUN status and two indicators for the control source. The nine pushbuttons on the panel are used for panel programming and monitoring of all SVX9000 parameters. The panel is detachable and isolated from the input line potential. Include LOC/REM key to choose control location.	A	KEYPAD-LOC/REM
Keypad Remote Mounting Kit —This option is used to remote mount the SVX9000 keypad. The footprint is compatible to the SV9000 remote mount kit. Includes 10 ft cable, keypad holder and mounting hardware.	—	OPTRMT-KIT-9000X

Miscellaneous Options

Description	Catalog Number
9000XDrive —A PC-based tool for controlling and monitoring of the SVX9000. Features include: loading parameters that can be saved to a file or printed, setting references, starting and stopping the motor, monitoring signals in graphical or text form, and real-time display. To avoid damage to the drive or computer, SVDriveable must be used.	9000XDRIVE
SVDriveable —6 ft (1.8m) RS-232 cable (22 gauge) with a 7-pin connector on each end. Should be used in conjunction with the 9000XDrive option to avoid damage to the SVX9000 or computer. The same cable can be used for downloading specialized applications to the drive.	SVDRIVECABLE
External Dynamic Braking Resistors —Used with the dynamic braking chopper circuit to absorb motor regenerative energy for stopping the load and to dissipate the energy flowing back into the drive. Resistors are separated into standard duty and heavy-duty. Standard duty is defined as 20% duty or less with 100% braking torque, while heavy-duty is defined as 50% duty or less with 150% braking torque.	①

Open Drive Options**Brake Chopper Options**

The brake chopper circuit option is used for applications that require dynamic braking. Dynamic braking resistors are not included with drive

purchase. Consult the factory for dynamic braking resistors which are supplied separately. Resistors are not UL Listed.

For brake chopper circuit selection and adder—NEMA Type 1/IP21, NEMA Type 12/IP54, Chassis, consult the factory. Delivery code is FP.

Conformal (Varnished) Coating ②

Chassis Frame	Delivery Code
FR4	FP
FR5	FP
FR6	FP
FR7	FP
FR8	FP
FR9	FP
FR10	FP
FR11	FP
FR12	FP
FR13	FP
FR14	FP

Conformal Coated Board Kits ③

Field Installed Catalog Number	Factory Installed Option Designator
OPT_V ④	⑤

Notes

- ① Consult factory.
- ② See Product Selection on **Pages V6-T2-19 to V6-T2-22**, 208–240V, 380–500V, 525–690V. Consult the factory for adder.
- ③ See option catalog numbers on **Page V6-T2-24**.
- ④ Replace “_” with the correct catalog number from **Page V6-T2-24**. Example: OPTC2V.
- ⑤ Construct catalog numbers for factory installed per Catalog Number Selection on **Page V6-T2-18**.

Replacement Parts

SVX9000 Drives Spare Units

208–690V, Frames 4–12

Description	Catalog Number
-------------	----------------

Control unit—Includes the control board, blue base housing, installed SVX9000 software program and blue flip cover. **CSBS0000000000**
Does not include any OPT boards or keypad. See **Page V6-T2-24** for standard and option boards and keypad.

SVX9000 Drives Replacement Parts

208–240V, Frames FR4–FR8

Frame hp (I _H):	4 3/4	1	1-1/2	2	3	5 ^①	5	7-1/2	10	15	20	25	30	40	50	60	Delivery Code	Catalog Number
Control Board																		
1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	W	VB00252
Power Boards																		
1																	FB	VB00308-0004-2
	1																FB	VB00308-0007-2
		1															FB	VB00308-0008-2
			1														FB	VB00310-0011-2
				1													FB	VB00310-0012-2
					1												FB	VB00313-0017-2
						1											FB	VB00313-0025-2
							1										FB	VB00313-0031-2
								1									FB	VB00316-0048-2
									1								FB	VB00316-0061-2
										1							FB	VB00319-0075-2
											1						FB	VB00319-0088-2
												1					FB	VB00319-0114-2
													1				FB	VB00322-0140-2
														1			FB	VB00322-0170-2
															1		FB	VB00322-0205-2
Electrolytic Capacitors																		
2	2	2															W	PP01000
			2	2													W	PP01001
					2	2											W	PP01002
							2										W	PP01003
								2	2								W	PP01004
										2	2		2	4	4		W	PP01005
																4	W	PP01099
Cooling Fans																		
1	1	1	1	1													W	PP01060
					1	1	1										W	PP01061
								1	1								W	PP01062
										1	1	1					W	PP01063
														1	1	1	FC	PP01123 ^②
1	1	1	1	1													W	PP01086
					1	1	1	1	1								FC	PP01088
										1	1	1					W	PP01049
														1	2	2	FC	CP01180
														1	1	1	FC	PP08037

Notes

① I_L only; has no corresponding I_H rated hp rating.

② PP00061 capacitor not included in main fan; please order separately.

2.3

Adjustable Frequency Drives

SVX9000 Drives

208–240V, Frames FR4–FR8, continued

2

Frame hp (I _H):	4			5				6			7			8				Delivery Code	Catalog Number
	3/4	1	1-1/2	2	3	5 ①	5	7-1/2	10	15	20	25	30	40	50	60			
IGBT Modules																			
1	1																W	CP01304	
		1															W	CP01305	
			1	1	1												W	CP01306	
						1											W	CP01307	
							1										W	CP01308	
								1									W	PP01022	
									1								W	PP01023	
										1							W	PP01024	
											1						W	PP01025	
												1					W	PP01029	
													1				W	PP01026	
														1	1		W	PP01027	
Choppers/Rectifiers																			
									1								W	CP01367	
										1							W	CP01368	
Diode/Thyristor Modules																			
											3	3	3				W	PP01035	
														3	3	3	W	CP01268	
Rectifying Boards																			
											1	1	1				W	VB00242	
														1	1	1	W	VB00227	

380–500V, Frames FR4–FR9

Frame hp (I _H):	4				5				6			7			8			9			Delivery Code	Catalog Number
	1	1-1/2	2	3	5	7-1/2 ①	7-1/2	10	15	20	25	30	40	50	60	75	100	125	150	200		
Control Board																						
	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	W	VB00252
Power Boards																						
1																					FB	VB00208-0003-5
	1																				FB	VB00208-0004-5
		1																			FB	VB00208-0005-5
			1																		FB	VB00208-0007-5
				1																	FB	VB00208-0009-5
					1																FB	VB00210-0012-5
						1															FB	VB00213-0016-5
							1														FB	VB00213-0022-5
								1													FB	VB00213-0031-5
									1												FB	VB00216-0038-5
										1											FB	VB00216-0045-5
											1										FB	VB00216-0061-5
												1									FB	VB00219-0072-5
													1								FB	VB00219-0087-5
														1							FB	VB00219-0105-5
															1						FB	VB00236-0140-5
																1					FB	VB00236-0168-5
																	1				FB	VB00236-0205-5

Note

① I_L only; has no corresponding I_H rated hp rating.

380–500V, Frames FR4–FR9, continued

Frame hp (I _H):	4				5				6		7		8		9		Delivery Code	Catalog Number				
	1	1-1/2	2	3	5	7-1/2 ①	7-1/2	10	15	20	25	30	40	50	60	75			100	125	150	200
Electrolytic Capacitors																						
	2	2	2	2														W	PP01000			
					2	2												W	PP01001			
							2	2										W	PP01002			
									2									W	PP01003			
										2	2	2						W	PP01004			
													2	2	2	4	4	4	8	8	W	PP01005
Cooling Fans																						
	1	1	1	1	1	1												W	PP01060			
							1	1	1									W	PP01061			
										1	1	1						W	PP01062			
													1	1	1			W	PP01063			
																1	1	1			FC	PP01123 ②
																		1	1		FC	PP01080 ③
	1	1	1	1	1	1															W	PP01086
							1	1	1												FC	PP01088
										1	1	1	1	1	1						W	PP01049
																1	1	1			FC	CP01180
																			1 ④	2	W	PP01068
																			1	1	FC	PP09051
IGBT Modules																						
	1	1	1																		W	CP01304
				1	1																W	CP01305
						1	1														W	CP01306
								1													W	CP01307
									1												W	CP01308
										1											W	PP01020
											1										W	PP01022
												1									W	PP01023
													1								W	PP01024
														1							W	PP01025
															1						W	PP01029
																1					W	PP01026
																	1	1			W	PP01027
Chopper/Rectifiers																						
										1	1										W	CP01367
												1									W	CP01368
Diode/Thyristor Modules																						
													3	3	3						W	PP01035
																3	3	3			W	CP01268
																			3	3	W	PP01037

Notes

- ① I_L only; has no corresponding I_H rated hp rating.
 ② PP00061 capacitor not included in main fan; please order separately.
 ③ PP00011 capacitor not included in main fan; please order separately.
 ④ For FR9 NEMA Type 12/IP54 you need two PP01068 internal fans.

2.3

Adjustable Frequency Drives

SVX9000 Drives

380–500V, Frames FR4–FR9, continued

Frame hp (I _H):	4					5				6				7				8				9				Delivery Code	Catalog Number
	1	1-1/2	2	3	5	7-1/2 ①	7-1/2	10	15	20	25	30	40	50	60	75	100	125	150	200							
Rectifying Boards																											
													1	1	1								W	VB00242			
																1	1	1				W	VB00227				
																			1	1		W	VB00459				
Rectifying Module Sub-Assembly																											
																			1	1		W	FR09810				
Power Module Sub-Assemblies																											
																			1			W	FR09-150-4-ANS ②				
																				1		W	FR09-200-4-ANS ②				

380–500V, Frames FR10–FR12

Frame	10	11					12					Delivery Code	Catalog Number
hp (I _H):	250	300	350	400	500	550	600	650	700				
Control Board													
	1	1	1	1	1	1	1	1	1			W	VB00561 ^③
Shunt Boards													
	6											FC	VB00537
		6										FC	VB00497
			6				12	12	12			FC	VB00498
				9								FC	VB00538
					9							FC	VB00513
						9						FC	VB00514
Driver Boards													
				3	3	3						FC	VB00489
	1	1	1				2	2	2			FC	VB00487
Driver Adapter Board													
	1	1	1				2	2	2			FC	VB00330
ASIC Board													
	1	1	1	1	1	1	2	2	2			FC	VB00451
Feedback Interface Board													
							2	2	2			FC	VB00448
Star Coupler Board													
							1	1	1			FC	VB00336
Power Modules													
	1	1	1	2	2	2	2	2	2			FC	FR10820 ^④
	2	2	2									FC	FR10828
	1											FC	FR10-250-4-ANS ^②
		1										FC	FR10-300-4-ANS ^②
			1				2	2	2			FC	FR10-350-4-ANS ^②
				3								FC	FR11-400-4-ANS ^②
					3							FC	FR11-500-4-ANS ^②
						3						FC	FR11-550-4-ANS ^②

Notes

- ① I_L only; has no corresponding I_H rated hp rating.
- ② See **Page V6-T2-18** for details.
- ③ SPX9000 drives only (FR10 and larger).
- ④ Rectifying board not included.

380–500V, Frames FR10–FR12, continued

Frame hp (I _H):	10			11			12			Delivery Code	Catalog Number
	250	300	350	400	500	550	600	650	700		
Electrolytic Capacitors											
2	2	2	2	3	3	3	4	4	4	FC	PP00060
12	12	12	12	18	18	18	24	24	24	FC	PP01005
Fuses											
1	1	1	1	1	1	1	2	2	2	FC	PP01094
2	2	2	2	2	2	2	4	4	4	FC	PP01095
Cooling Fans and Isolation Transformers											
2	2	2	2	3	3	3	4	4	4	FC	VB00299
2	2	2	2	3	3	3	4	4	4	FC	PP01080 ①
2	2	2					4	4	4	FC	PP01068
1	1	1	1	1	1	1	2	2	2	FC	PP01096
1	1	1					2	2	2	FC	FR10844
1	1	1	1	3	3	3	2	2	2	FC	FR10845
1	1	1					2	2	2	FC	FR10846
1	1	1	1	3	3	3	2	2	2	FC	FR10847
Rectifying Board											
1	1	1	1	2	2	2	2	2	2	FC	VB00459

525–690V, Frames FR6–FR9

Frame hp (I _H):	6				7				8				9				Delivery Code	Catalog Number	
	2	3	5 ②	5	7-1/2	10	15	20	25	30	40	50	60	75	100	125			150
Control Board																			
1	1	1	1	1	1	1	1	1	1	1	1				1	1	1	W	VB00252
Driver Boards																			
1																		FB	VB00404-0004-6
	1																	FB	VB00404-0005-6
		1																FB	VB00404-0007-6
			1															FB	VB00404-0010-6
				1														FB	VB00404-0013-6
					1													FB	VB00404-0018-6
						1												FB	VB00404-0022-6
							1											FB	VB00404-0027-6
								1										FB	VB00404-0034-6
Power Boards																			
									1									FB	VB00419-0041-6
										1								FB	VB00419-0052-6
											1							FB	VB00422-0062-6
												1						FB	VB00422-0080-6
													1					FB	VB00422-0100-6
Power Modules																			
														1				FC	FR09-100-5-ANS ⑨
															1			FC	FR09-125-5-ANS ⑨
																1		FC	FR09-150-5-ANS ⑨
																	1	FC	FR09-175-5-ANS ⑨

Notes

① PP00060 capacitor not included in main fan; please order separately.

② I_L only; has no corresponding I_H rated hp rating.

③ See Page V6-T2-18 for details.

525–690V, Frames FR6–FR9, continued

2

Frame hp (I _H):	6 2	3	5 ①	5	7-1/2	10	15	20	25	7 30	40	8 50	60	9 75	100	125	150	200 ①	Delivery Code	Catalog Number
Electrolytic Capacitors																				
	2	2	2	2	2	2	2	2	2										FC	PP01093
										2	2	4	4		8	8	8	8	FC	PP01041
														4					FC	PP01040
Fuses																				
												1	1	1	1	1	1	1	W	PP01094
												2	2	2	2	2	2	2	W	PP01095
Cooling Fans																				
	1	1	1	1	1														W	PP01061
						1	1	1	1										W	PP01062
										1	1								W	PP01063
												1	1	1					FC	PP01123
	1	1	1	1	1	1	1	1	1	1	1								W	PP01049
												1	1	1					FC	CP01180
															1	1	1	1 ②	W	PP01068
															1	1	1	1	FC	PP01080
Fan Power Supply																				
																1	1	1	FC	VB00299
IGBT Modules																				
	3	3	3	3	3	3	3	3	3										FC	PP01091
										1	1								FC	PP01089
												1	1	1					FC	PP01127
IGBT/Diode (Brake)																				
	1	1	1	1	1	1	1	1	1	1	1	2	2	2	2	2	2	2	FC	PP01040
Diode Module																				
	1	1	1	1	1	1	1	1	1										FC	PP01092
Diode/Thyristor Modules																				
										3	3								FC	PP01071
															3	3	3	3	FC	PP01072
Rectifying Boards																				
										1	1								FC	VB00442
															1	1	1	1	FC	VB00460
Rectifying Module Sub-Assemblies																				
																1	1	1	W	FR09810
																1	1	1	FC	FR09811

Notes① I_L only; has no corresponding I_H rated hp rating.

② For NEMA Type 12/IP54, two PP01068 internal fans are needed.

525–690V, Frames FR10–FR12

Frame hp (I _H):	10 200	250	300	11 400	450	500	12 550	600	700	Delivery Code	Catalog Number
Component Boards											
1	1		1	1	1	1	1	1	1	W	VB00561 ^①
1	1		1	1	1	1	2	2	2	FC	VB00451
6										FC	VB00545
	6									FC	VB00510
		6					12	12	12	FC	VB00511
1	1	1					2	2	2	FC	VB00330
1	1	1					2	2	2	FC	VB00487
			3	3	3					FC	VB00489
			9							FC	VB00546
				9						FC	VB00547
					9					FC	VB00512
							2	2	2	FC	VB00448
							1	1	1	FC	VB00336
Power Modules											
1	1	1	2	2	2	2	2	2	2	FC	FR10821 ^②
2	2	2								FC	FR10829
1										FC	FR10-200-5-ANS ^③
	1									FC	FR10-250-5-ANS ^③
		1					2	2	2	FC	FR10-300-5-ANS ^③
			3							FC	FR11-400-5-ANS ^③
				3						FC	FR11-450-5-ANS ^③
					3					FC	FR11-500-5-ANS ^③
Electrolytic Capacitors											
2	2	2	3	3	3	4	4	4	4	FC	PP00060
12	12	12	18	18	18	24	24	24	24	FC	PP01099
Fuses											
1	1	1	1	1	1	2	2	2	2	FC	PP01094
2	2	2	2	2	2	4	4	4	4	FC	PP01095
Cooling Fans and Isolation Transformers											
2	2	2	3	3	3	4	4	4	4	FC	VB00299
2	2	2	3	3	3	4	4	4	4	FC	PP01080 ^④
2	2	2				4	4	4	4	FC	PP01068
1	1	1	1	1	1	2	2	2	2	FC	PP01096
1	1	1				2	2	2	2	FC	FR10844
1	1	1	3	3	3	2	2	2	2	FC	FR10845
1	1	1				2	2	2	2	FC	FR10846
1	1	1	3	3	3	2	2	2	2	FC	FR10847
Fan Power Supply											
						1	1	1	1	FC	VB00299
Rectifying Boards											
1	1	1	2	2	2	2	2	2	2	FC	VB00460

Notes

- ① SPX9000 drives only (FR10 and larger).
 ② Rectifying board not included.
 ③ See **Page V6-T2-18** for details.
 ④ PP00060 capacitor not included in main fan; please order separately.

Technical Data and Specifications

SVX9000 Drives

2

Description	Specification
Input Ratings	
Input voltage (V_{in})	+10%/-15%
Input frequency (f_{in})	50/60 Hz (variation up to 45–66 Hz)
Connection to power	Once per minute or less (typical operation)
High withstand rating	100 kAIC
Output Ratings	
Output voltage	0 to V_{in}
Continuous output current	I_H rated 100% at 122°F (50°C), FR9 and below I_L rated 100% at 104°F (40°C), FR9 and below I_H/I_L 100% at 104°F (40°C), FR10 and above
Overload current (I_H/I_L)	150% I_H , 110% I_L for 1 min.
Output frequency	0 to 320 Hz
Frequency resolution	0.01 Hz
Initial output current (I_H)	250% for 2 seconds
Control Characteristics	
Control method	Frequency control (V/f) Open loop: Sensorless vector control Closed loop: SPX9000 drives only
Switching frequency Frame 4–6 Frame 7–12	Adjustable with parameter 2.6.9 1–16 kHz; default 10 kHz 1–10 kHz; default 3.6 kHz
Frequency reference	Analog input: Resolution 0.1% (10-bit), accuracy $\pm 1\%$ V/Hz Panel reference: Resolution 0.01 Hz
Field weakening point	30–320 Hz
Acceleration time	0–3000 sec.
Deceleration time	0–3000 sec.
Braking torque	DC brake: 30% $\times T_n$ (without brake option)
Ambient Conditions	
Ambient operating temperature	14°F (–10°C), no frost to 122°F (50°C) I_H (FR4–FR9) 14°F (–10°C), no frost to 104°F (40°C) I_H (FR10 and up) 14°F (–10°C), no frost to 104°F (40°C) I_L (all frames)
Storage temperature	–40° to 158°F (–40° to 70°C)
Relative humidity	0 to 95% RH, noncondensing, non-corrosive, no dripping water
Air quality	Chemical vapors: IEC 721-3-3, unit in operation, class 3C2; Mechanical particles: IEC 721-3-3, unit in operation, class 3S2
Altitude	100% load capacity (no derating) up to 3280 ft (1000m); 1% derating for each 328 ft (100m) above 3280 ft (1000m); max. 9842 ft (3000m)
Vibration	EN 50178, EN 60068-2-6; 5 to 50 Hz, displacement amplitude 1 mm (peak) at 3 to 15.8 Hz, max. acceleration amplitude 1G at 15.8 to 150 Hz
Shock	EN 50178, EN 60068-2-27 UPS Drop test (for applicable UPS weights) Storage and shipping: max. 15G, 11 ms (in package)
Enclosure class	NEMA 1/IP21 or NEMA 12/IP54, open chassis/IP20


Description	Specification
Control Connections	
Analog input voltage	0 to 10V, R = 200 kohms (–10 to 10V joystick control) resolution 0.1%; accuracy $\pm 1\%$
Analog input current	0(4) to 20 mA; R_i —250 ohms differential
Digital inputs (6)	Positive or negative logic; 18 to 30 Vdc
Auxiliary voltage	+24V $\pm 15\%$, max. 250 mA
Output reference voltage	+10V $\pm 3\%$, max. load 10 mA
Analog output	0(4) to 20 mA; R_i max. 500 ohms; resolution 10 bit; accuracy $\pm 2\%$
Digital outputs	Open collector output, 50 mA/48V
Relay outputs	Two programmable Form C relay outputs switching capacity: 24 Vdc/8A, 250 Vac/8A, 125 Vdc/0.4A
Protections	
Overcurrent protection	Trip limit 4.0 $\times I_H$ instantaneously
Overvoltage protection	Yes
Undervoltage protection	Yes
Earth fault protection	In case of earth fault in motor or motor cable, only the frequency converter is protected
Input phase supervision	Trips if any of the input phases are missing
Motor phase supervision	Trips if any of the output phases are missing
Overtemperature protection	Yes
Motor overload protection	Yes
Motor stall protection	Yes
Motor underload protection	Yes
Short circuit protection	Yes (+24V and +10V reference voltages)

Standard I/O Specifications

Description	Specification
Six–digital input programmable	24V: “0” $\leq 10V$, “1” $\geq 18V$; $R_i > 5$ kohms
Two–analog input configurable w/jumpers	Voltage: 0– $\pm 10V$, $R_i > 200$ kohms Current: 0 (4)–20 mA, $R_i = 250$ ohms
Two–digital output programmable	Form C relays 250 Vac 30 Vdc 2 amp resistive
One–analog output programmable configurable w/jumper	0–20 mA, R_i max. 500 ohms 10 bits $\pm 2\%$
One digital output programmable	Open collector 48 Vdc 50 mA

Dimensions

Approximate Dimensions in Inches (mm)

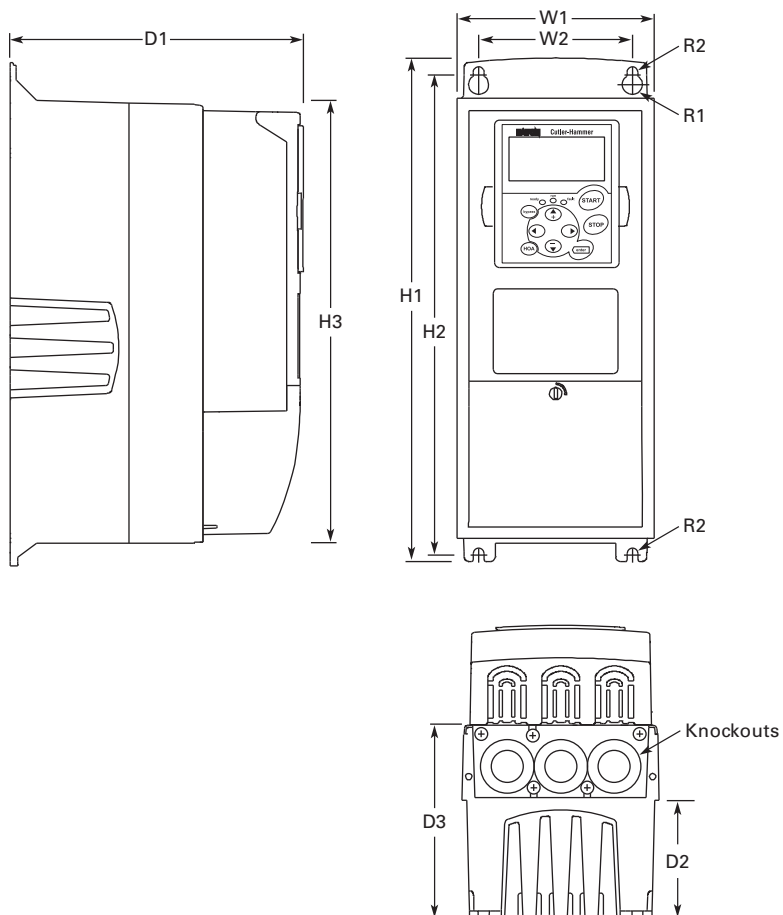9000X Open Drives**NEMA Type 1/IP21 and NEMA Type 12/IP54, FR4, FR5 and FR6**

Voltage	hp (I _H)	H1	H2	H3	D1	D2	D3	W1	W2	R1 Dia.	R2 Dia.	Weight Lbs (kg)	Knockouts at Inches (mm) N1 (O.D.)
FR4													
230V	3/4–3	12.9	12.3	11.5	7.5	3.0	4.9	5.0	3.9	0.5 (13)	0.3 (7)	11.0 (5)	3 @ 1.1 (28)
480V	1–5	(327)	(313)	(292)	(190)	(77)	(126)	(128)	(100)				
FR5													
230V	5–7-1/2	16.5	16.0	15.3	8.4	3.9	5.8	5.6	3.9	0.5 (13)	0.3 (7)	17.9 (8)	2 @ 1.5 (37)
480V	7-1/2–15	(419)	(406)	(389)	(214)	(100)	(148)	(143)	(100)				1 @ 1.1 (28)
FR6													
230V	10–15	22.0	21.3	20.4	9.3	4.2	6.5	7.6	5.8	0.6 (15.5)	0.4 (9)	40.8 (19)	3 @ 1.5 (37)
480V	20–30	(558)	(541)	(519)	(237)	(105)	(165)	(195)	(148)				
575V	2–25												

2.3


Adjustable Frequency Drives

SVX9000 Drives

Approximate Dimensions in Inches (mm)

NEMA Type 1/IP21 and NEMA Type 12/IP54 with Flange Kit, FR4, FR5 and FR6

2

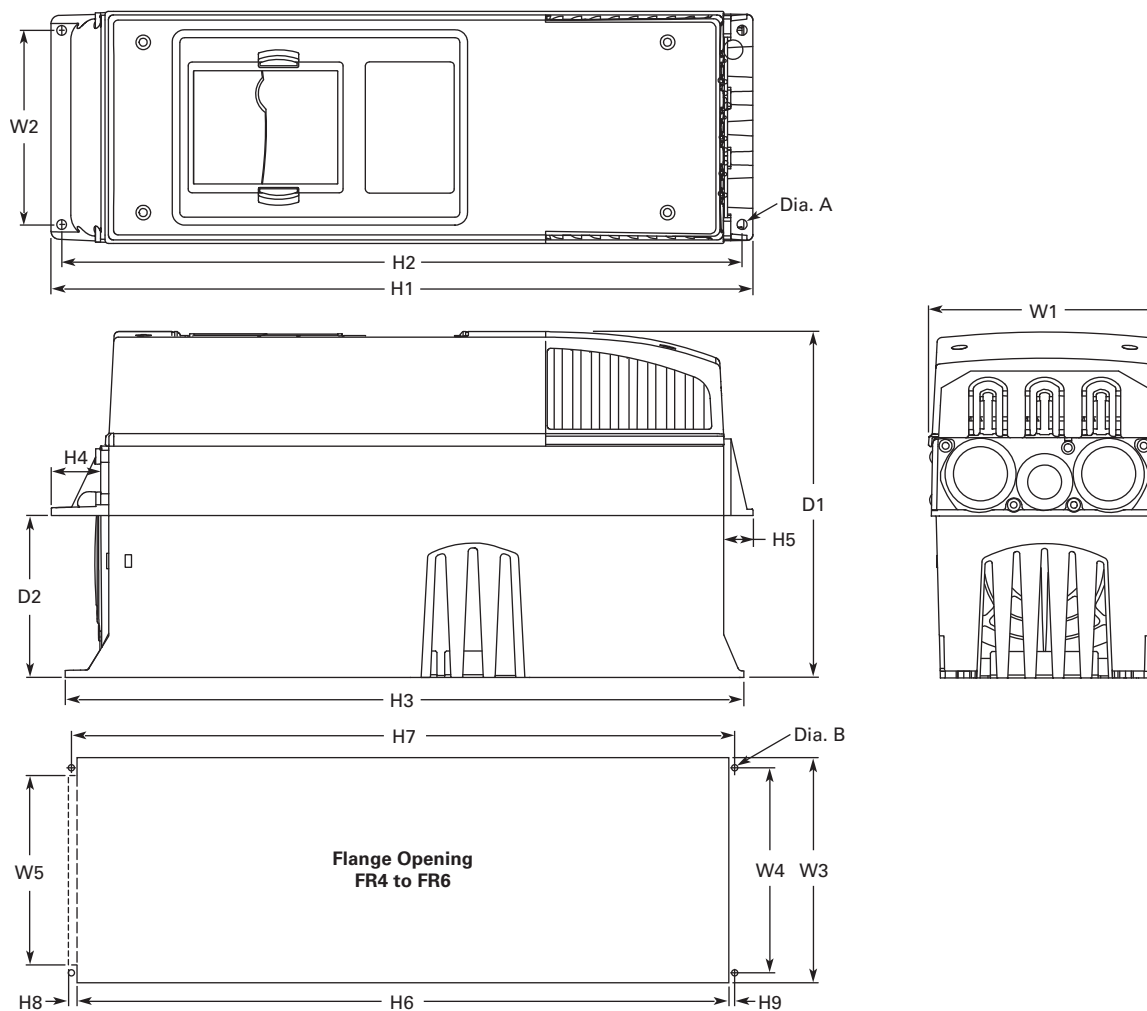

FR4, FR5 and FR6 with Flange Kit

W1	W2	H1	H2	H3	H4	H5	D1	D2	Dia. A
FR4									
5.0 (128)	4.5 (113)	13.3 (337)	12.8 (325)	12.9 (327)	1.2 (30)	0.9 (22)	7.5 (190)	3.0 (77)	0.3 (7)
FR5									
5.6 (143)	4.7 (120)	17.0 (434)	16.5 (420)	16.5 (419)	1.4 (36)	0.7 (18)	8.4 (214)	3.9 (100)	0.3 (7)
FR6									
7.7 (195)	6.7 (170)	22.0 (560)	21.6 (549)	22.0 (558)	1.2 (30)	0.8 (20)	9.3 (237)	4.2 (106)	0.3 (7)


Flange Opening, FR4 to FR6

W3	W4	W5	H6	H7	H8	H9	Dia. B
FR4							
4.8 (123)	4.5 (113)	—	12.4 (315)	12.8 (325)	—	0.2 (5)	0.3 (7)
FR5							
5.3 (135)	4.7 (120)	—	16.2 (410)	16.5 (420)	—	0.2 (5)	0.3 (7)
FR6							
7.3 (185)	6.7 (170)	6.2 (157)	21.2 (539)	21.6 (549)	0.3 (7)	0.2 (5)	0.3 (7)

Approximate Dimensions in Inches (mm)

NEMA Type 1/IP21 and NEMA Type 12/IP54, FR7

2

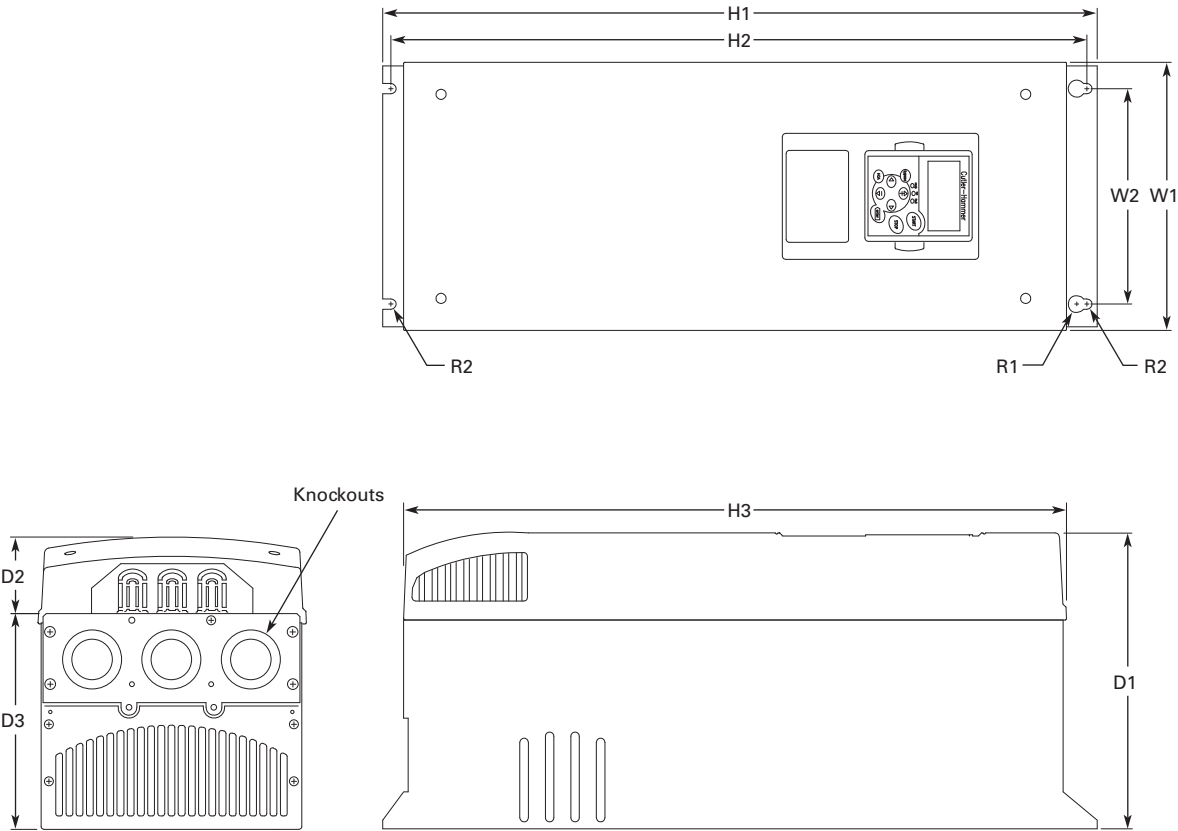

Voltage	hp (I _H)	H1	H2	H3	D1	D2	D3	W1	W2	R1 Dia.	R2 Dia.	Weight Lbs (kg)	Knockouts at Inches (mm) N1 (O.D.)
230V	20–30	24.8 (630)	24.2 (614)	23.2 (590)	10.1 (257)	3.0 (77)	7.3 (184)	9.3 (237)	7.5 (190)	0.7 (18)	0.4 (9)	77.2 (35)	3 at 1.5 (37)
480V	40–60												
575V	30–40												

2.3


Adjustable Frequency Drives

SVX9000 Drives

Approximate Dimensions in Inches (mm)

NEMA Type 1/IP21 and NEMA Type 12/IP54, FR8


2

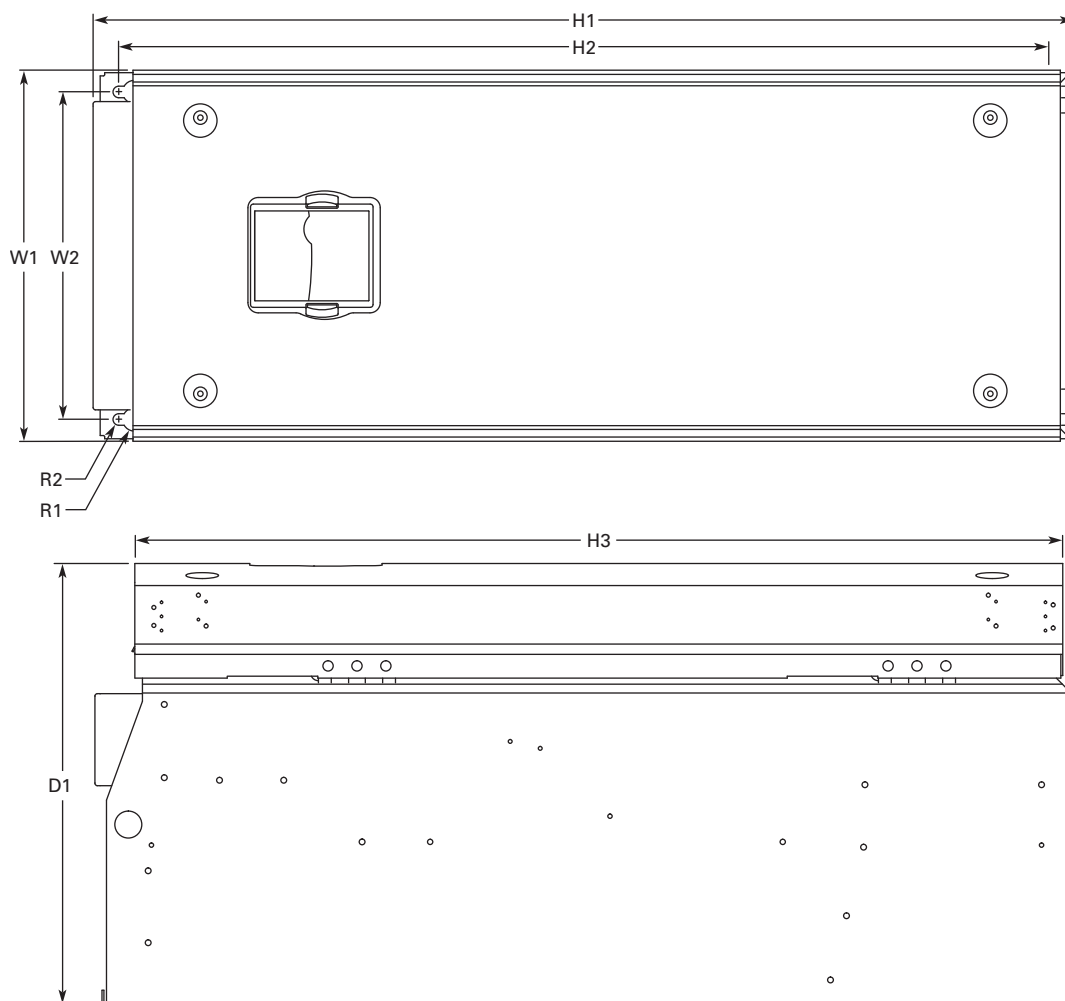

Voltage	hp (I _H)	D1	H1	H2	H3	W1	W2	R1 Dia.	R2 Dia.	Weight Lbs (kg)
230V	40–60	13.5 (344)	30.1 (764)	28.8 (732)	28.4 (721)	11.5 (291)	10 (255)	0.7 (18)	0.4 (9)	127 (58)
480V	75–125									
575V	50–75									

Approximate Dimensions in Inches (mm)

NEMA Type 1/IP21 and NEMA Type 12/IP54, with Flange Kit, FR7 and FR8

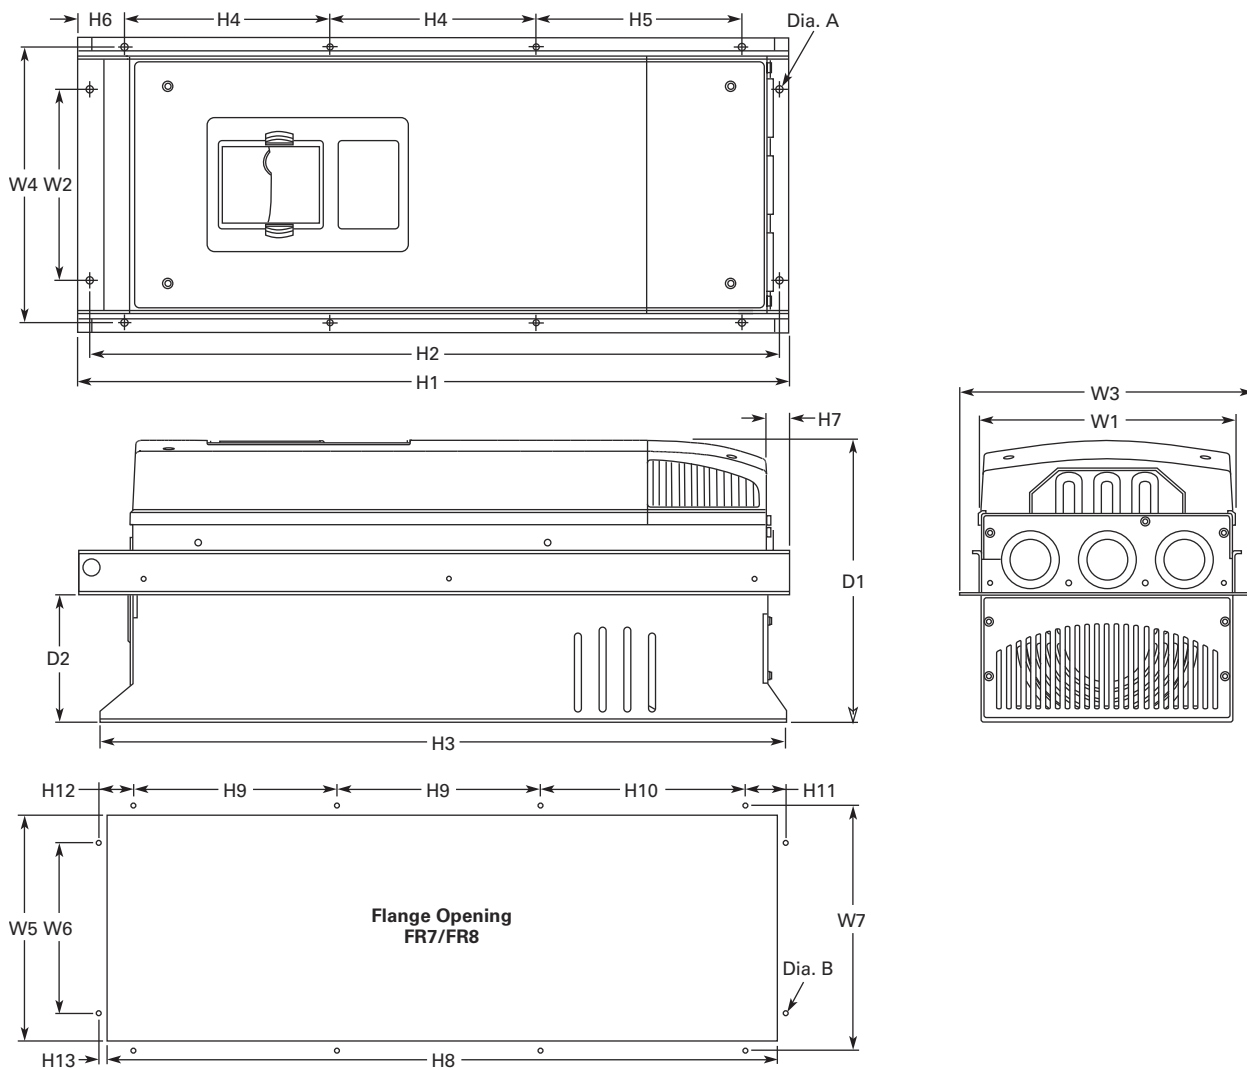

W1	W2	W3	W4	H1	H2	H3	H4	H5	H6	H7	D1	D2	Dia. A
FR7													
9.3 (237)	6.8 (175)	10.6 (270)	10.0 (253)	24.9 (652)	24.8 (632)	24.8 (630)	7.4 (189)	7.4 (189)	0.9 (23)	0.8 (20)	10.1 (257)	4.6 (117)	0.3 (6)
FR8													
11.2 (285)	—	14.0 (355)	13.0 (330)	32.8 (832)	—	29.3 (745)	10.2 (258)	10.4 (265)	1.7 (43)	2.2 (57)	13.5 (344)	4.3 (110)	0.4 (9)

Flange Opening, FR7 and FR8

W5	W6	W7	H8	H9	H10	H11	H12	H13	Dia. B
FR7									
9.2 (233)	6.9 (175)	10.0 (253)	24.4 (619)	7.4 (189)	7.4 (189)	1.4 (35)	1.3 (32)	1.0 (25)	0.3 (6)
FR8									
11.9 (301)	—	13.0 (330)	31.9 (810)	10.2 (258)	10.4 (265)	—	—	1.3 (33)	0.4 (9)

2.3


Adjustable Frequency Drives

SVX9000 Drives

Approximate Dimensions in Inches (mm)

NEMA Type 1/IP21 and NEMA Type 12/IP54, FR9

2

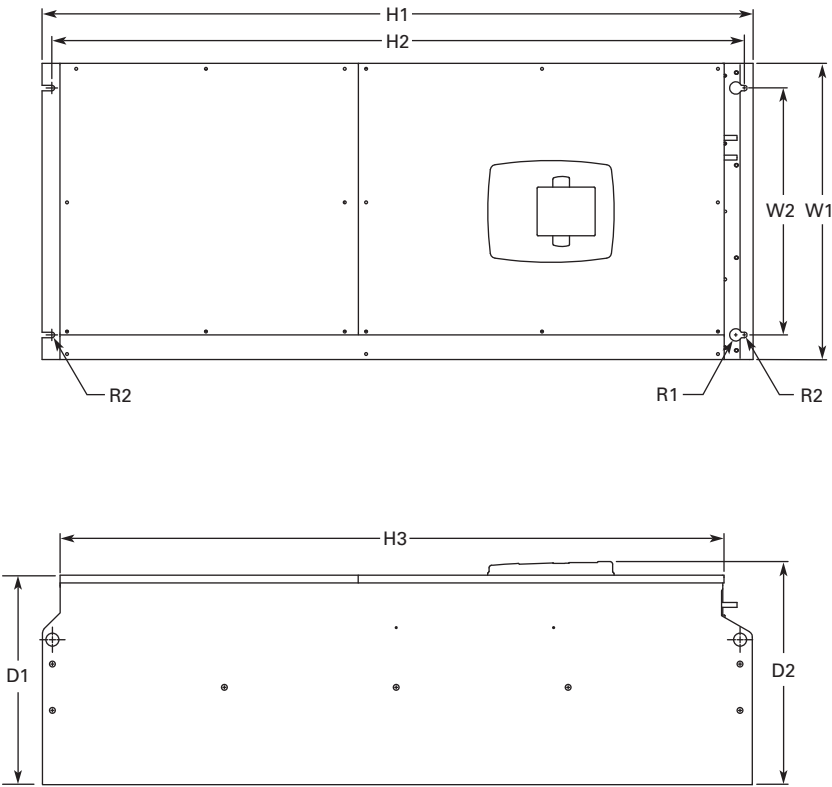


Voltage	hp (I _H)	H1	H2	H3	D1	D2	W1	W2	R1 Dia.	R2 Dia.	Weight Lbs (kg)
230V	75–100	45.3 (1150)	44.1 (1120)	42.4 (1076)	13.4 (340)	14.3 (362)	18.9 (480)	15.7 (400)	0.8 (20)	0.4 (9)	321.9 (146)
480V	150–200										
575V	100–175										

Approximate Dimensions in Inches (mm)

NEMA Type 1/IP21 and NEMA Type 12/IP54 FR9, continued

2

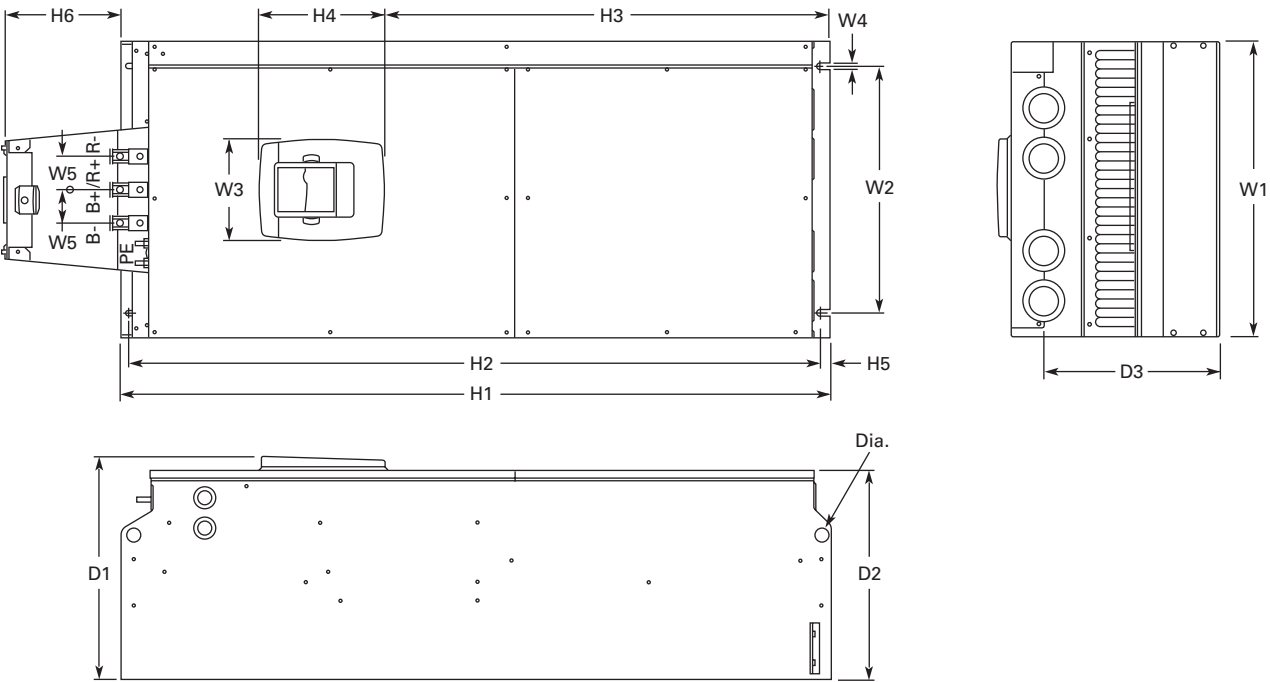

W1	W2	W3	W4	W5	H1	H2	H3	H4	H5	H6 ①	D1	D2	D3	Dia.
18.9 (480)	15.7 (400)	6.5 (165)	0.4 (9)	2.1 (54)	45.3 (1150)	44.1 (1120)	28.3 (721)	8.0 (205)	0.6 (16)	7.4 (188)	14.2 (361.5)	13.4 (340)	11.2 (285)	0.8 (21)

Note

① Brake resistor terminal box (H6) included when brake chopper ordered.

2.3


Adjustable Frequency Drives

SVX9000 Drives

Approximate Dimensions in Inches (mm)

NEMA Type 1/IP21 and NEMA Type 12/IP54, FR9 with Flange Kit


2

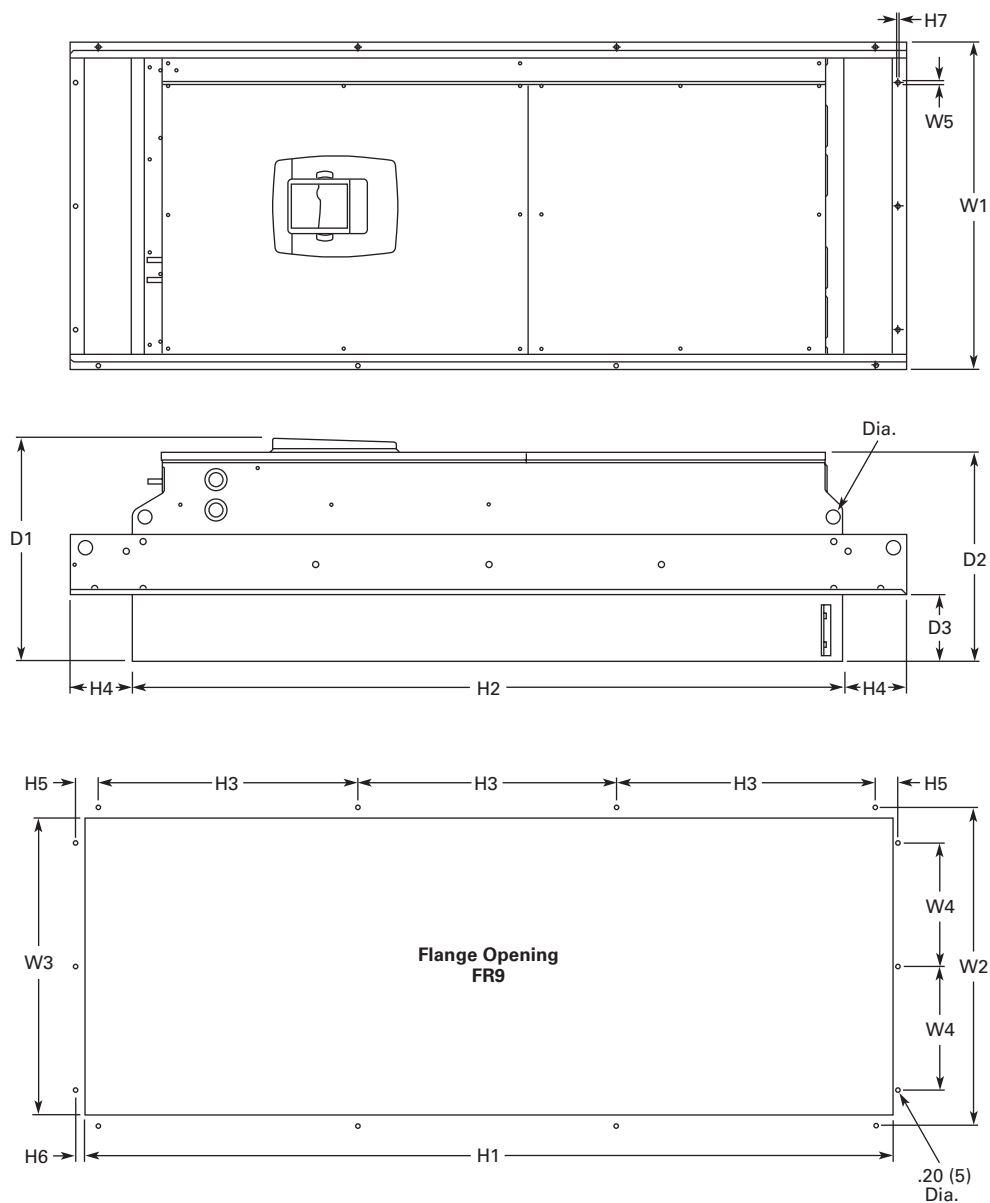

W1	W2	W3	W4	W5	H1	H2	H3	H4	H5	H6	H7	D1	D2	D3	Dia.
20.9 (530)	20.0 (510)	19.1 (485)	7.9 (200)	0.2 (5.5)	51.7 (1312)	45.3 (1150)	16.5 (420)	3.9 (100)	1.4 (35)	0.4 (9)	0.1 (2)	24.9 (362)	13.4 (340)	4.3 (109)	0.8 (21)

Approximate Dimensions in Inches (mm)

NEMA Type 1/IP21 and NEMA Type 12/IP54, FR10 Freestanding

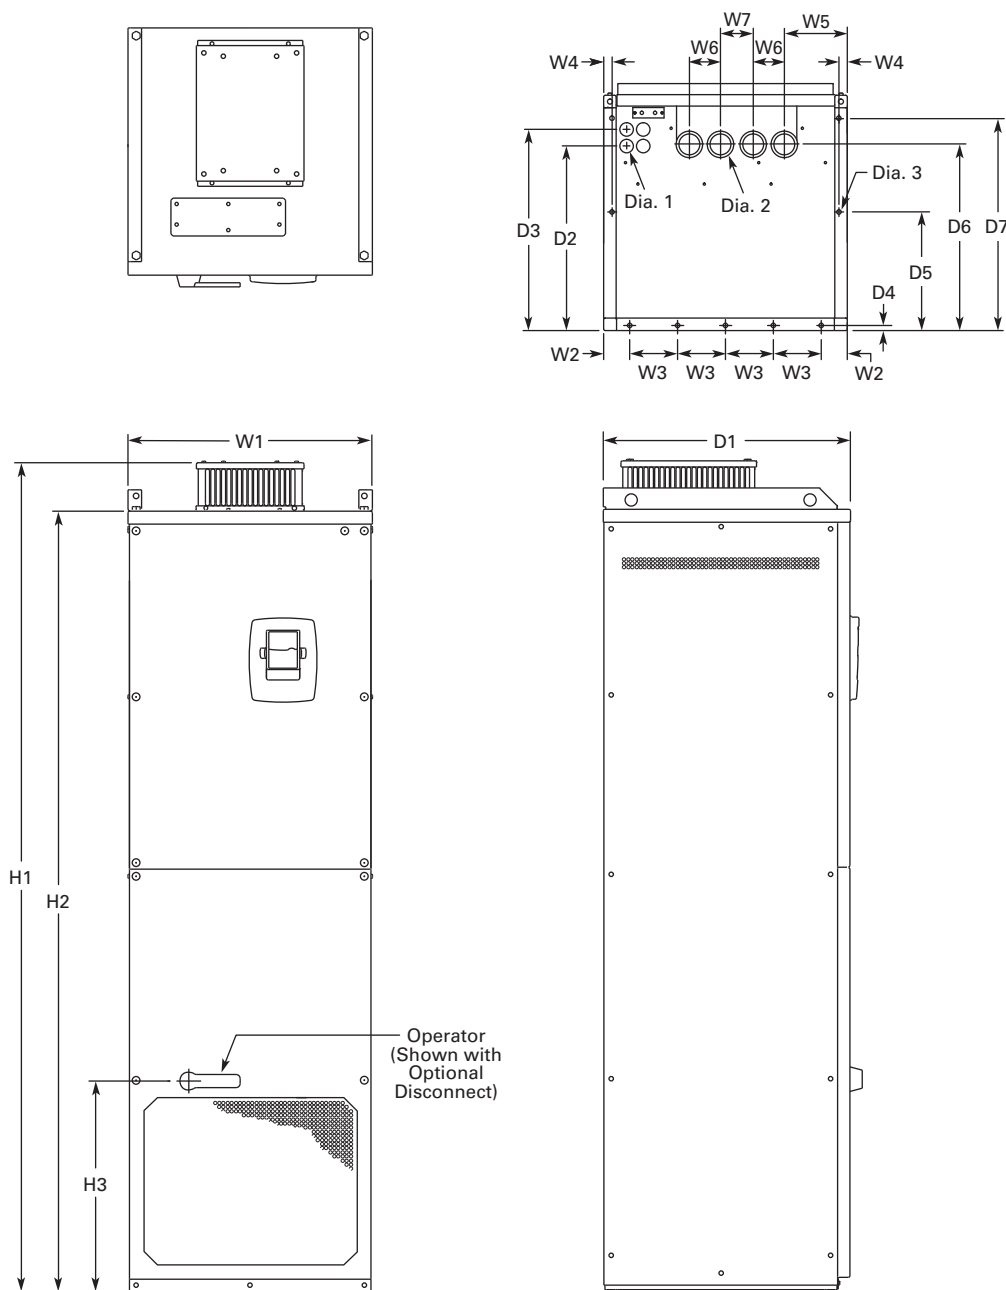

W1	W2	W3	W4	W5	W6	W7	H1	H2	H3	D1	D2	D3	D4	D5	D6	D7	Dia. 1	Dia. 2	Dia. 3	Weight Lbs (kg)
23.43 (595)	2.46 (62.5)	4.53 (115)	0.79 (20)	5.95 (151)	2.95 (75)	30.11 (79)	79.45 (2018)	74.80 (1900)	20.18 (512.5)	23.70 (602)	17.44 (443)	19.02 (483)	0.47 (12)	11.22 (285)	17.60 (447)	20.08 (510)	0.83 (21)	1.89 (48)	0.43 (11)	857 (389)


2.3 Adjustable Frequency Drives

SVX9000 Drives

Approximate Dimensions in Inches (mm)

FR10 Open Chassis ①

2

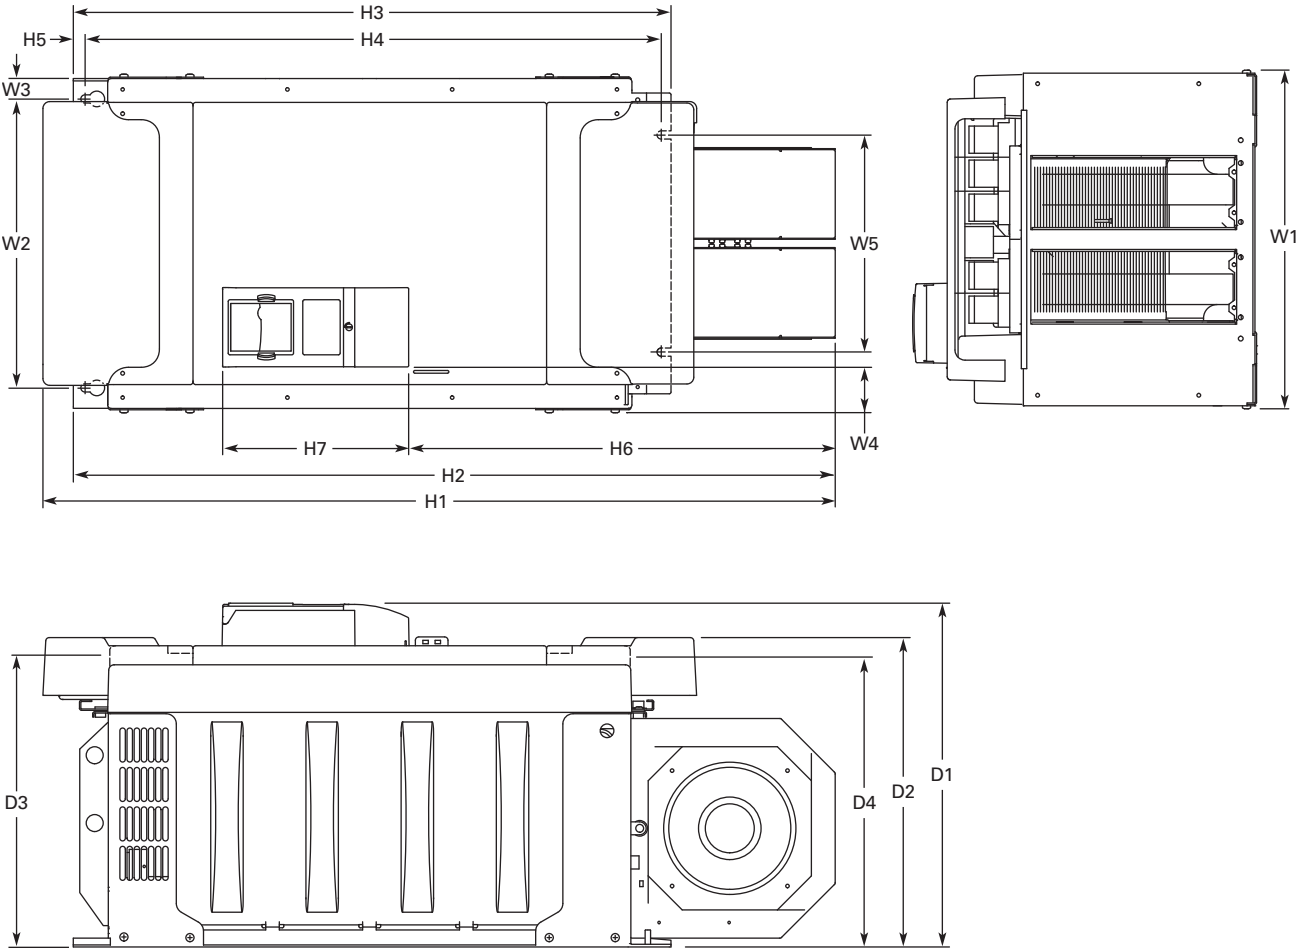

Voltage	hp (I _H)	W1	W2	W3	W4	W5	H1	H2	H3	H4	H5	H6	H7	D1	D2	D3	D4	Weight Lbs (kg)
480V	250–350	19.7 (500)	16.7 (425)	1.2 (30)	2.6 (67)	12.8 (325)	45.9 (1165)	44.1 (1121)	34.6 (879)	33.5 (850)	0.7 (17)	24.7 (627)	10.8 (275)	19.9 (506)	17.9 (455)	16.7 (423)	16.6 (421)	518 (235)
575V	200–300																	





Note

① 9000X FR12 is built of two FR10 modules. Please refer to SPX9000 installation manual for mounting instructions.

Approximate Dimensions in Inches (mm)

NEMA Type 1/IP21, FR11 Freestanding Drive

2

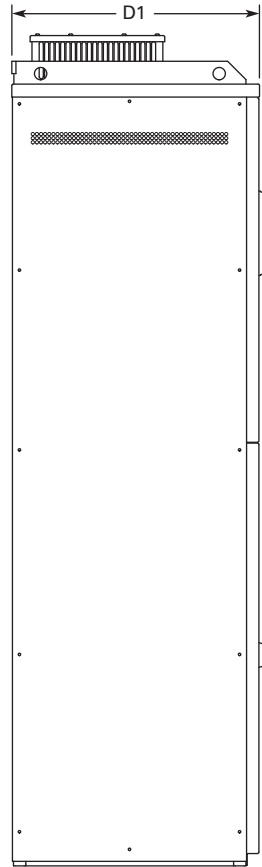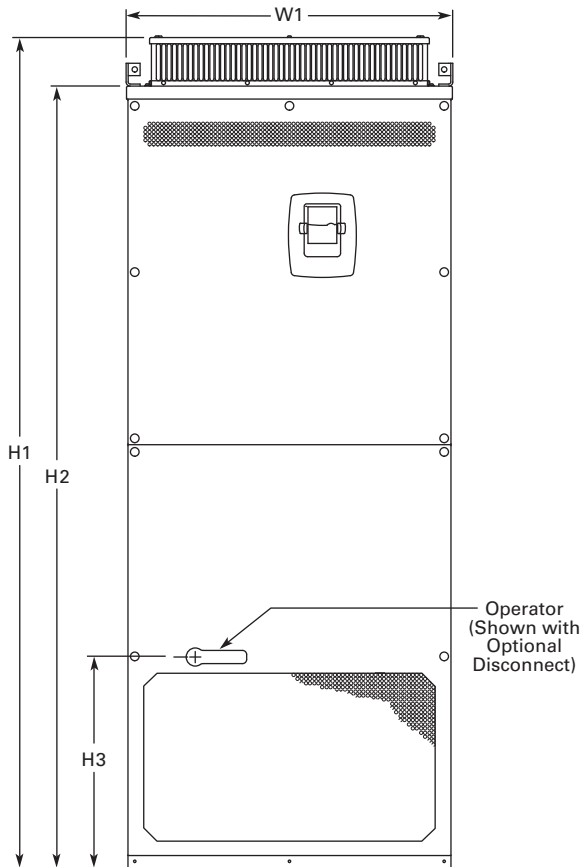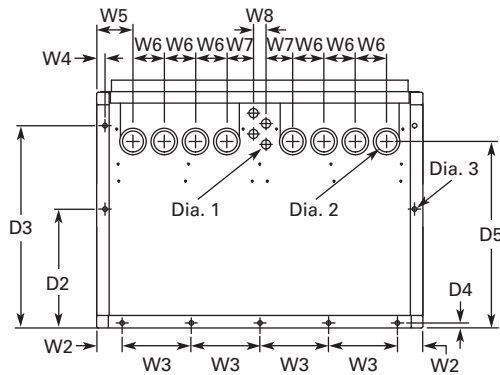

Voltage	hp (I _{HP})	W1	W2	W3	W4	W5	W6	W7	W8	H1	H2	H3	D1	D2	D3	D4	D5	Dia. 1	Dia. 2	Dia. 3	Weight Lbs (kg)
480	400–550	31.26 (794)	2.40 (61)	6.50 (165)	0.79 (20)	3.43 (87)	2.95 (75)	2.52 (64)	1.18 (30)	79.45 (2018)	74.80 (1900)	20.18 (512.5)	23.70 (602)	11.22 (285)	19.09 (485)	0.47 (12)	17.60 (447)	0.83 (21)	1.89 (48)	0.35 x 0.43 (9 x 11)	526 (239)

2.3


Adjustable Frequency Drives

SVX9000 Drives

Approximate Dimensions in Inches (mm)

FR11 Open Chassis

2

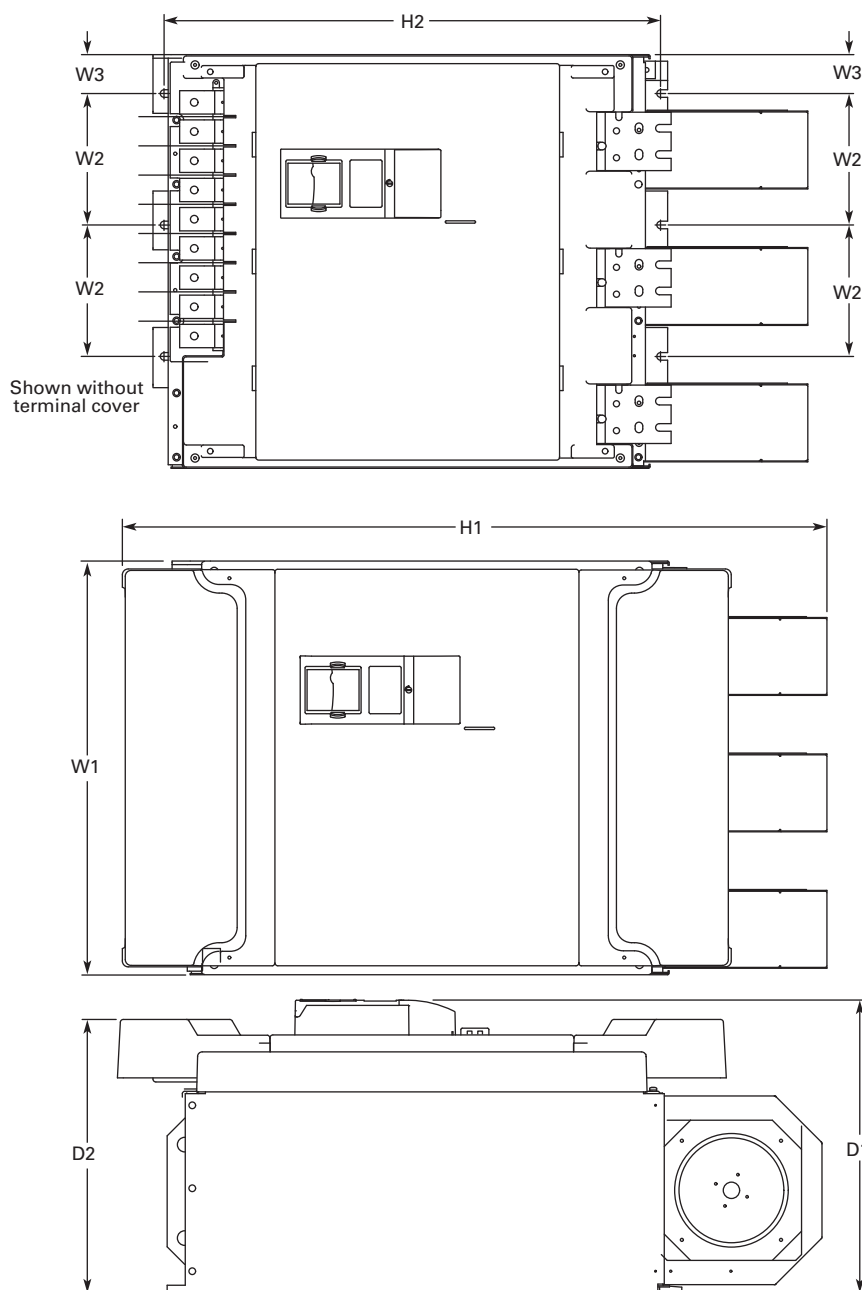


Voltage	hp (I _H)	W1	W2	W3	H1	H2	D1	D2	Weight Lbs (kg)
480V	400–550	27.9 (709)	8.86 (225)	2.6 (67)	45.5 (1155)	33.5 (850)	19.8 (503)	18.4 (468)	833 (378)
575V	400–500								

Approximate Dimensions in Inches (mm)

FR13, Open Chassis Inverter

2

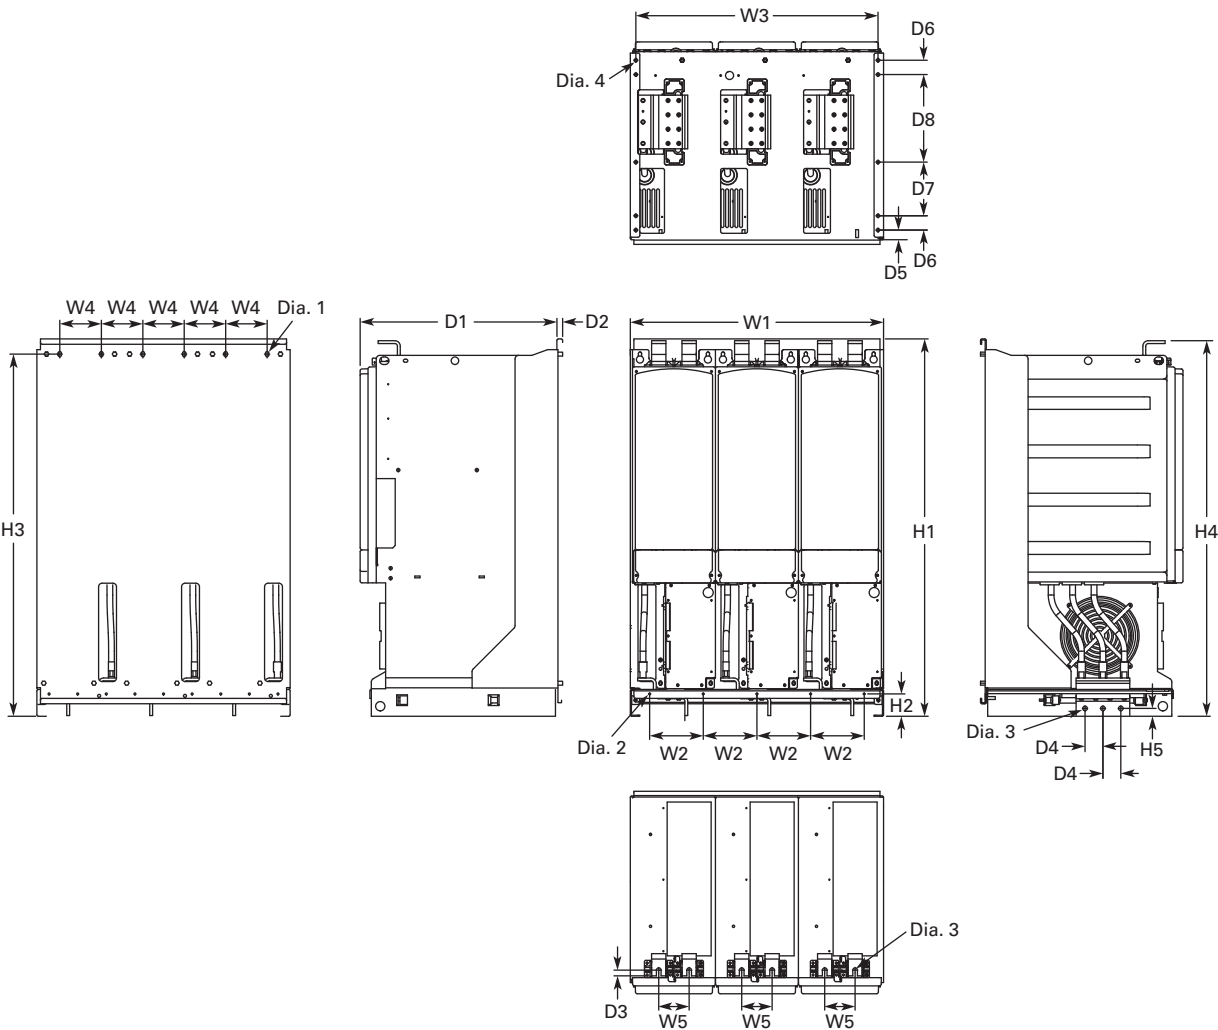

W1	W2	W3	W4	W5	H1	H2	H3	H4	H5	D1	D2	D3	D4	D5	D6	D7	D8	Dia. 1	Dia. 2	Dia. 3	Dia. 4	Weight Lbs (kg)
27.87 (708)	5.91 (150)	26.65 (677)	4.57 (116)	3.35 (85)	41.54 (1055)	2.46 (62.5)	39.86 (1012.5)	41.34 (1050)	0.79 (20)	21.77 (553)	0.51 (13)	0.63 (16)	1.97 (50)	1.06 (27)	1.57 (40)	5.91 (150)	9.64 (244.8)	0.35x0.59 (9x15)	0.18 (4.6)	0.51 (13)	0.37 (9.5)	683 (310)

Notes
9000X FR14 is built of two FR13 modules. Please refer to SPX9000 installation manual for mounting instructions.
FR13 is built from an inverter module and a converter module. Please refer to SPX9000 installation manual for mounting instructions.

2.3


Adjustable Frequency Drives

SVX9000 Drives

Approximate Dimensions in Inches (mm)

FR13, Open Chassis Converter

2

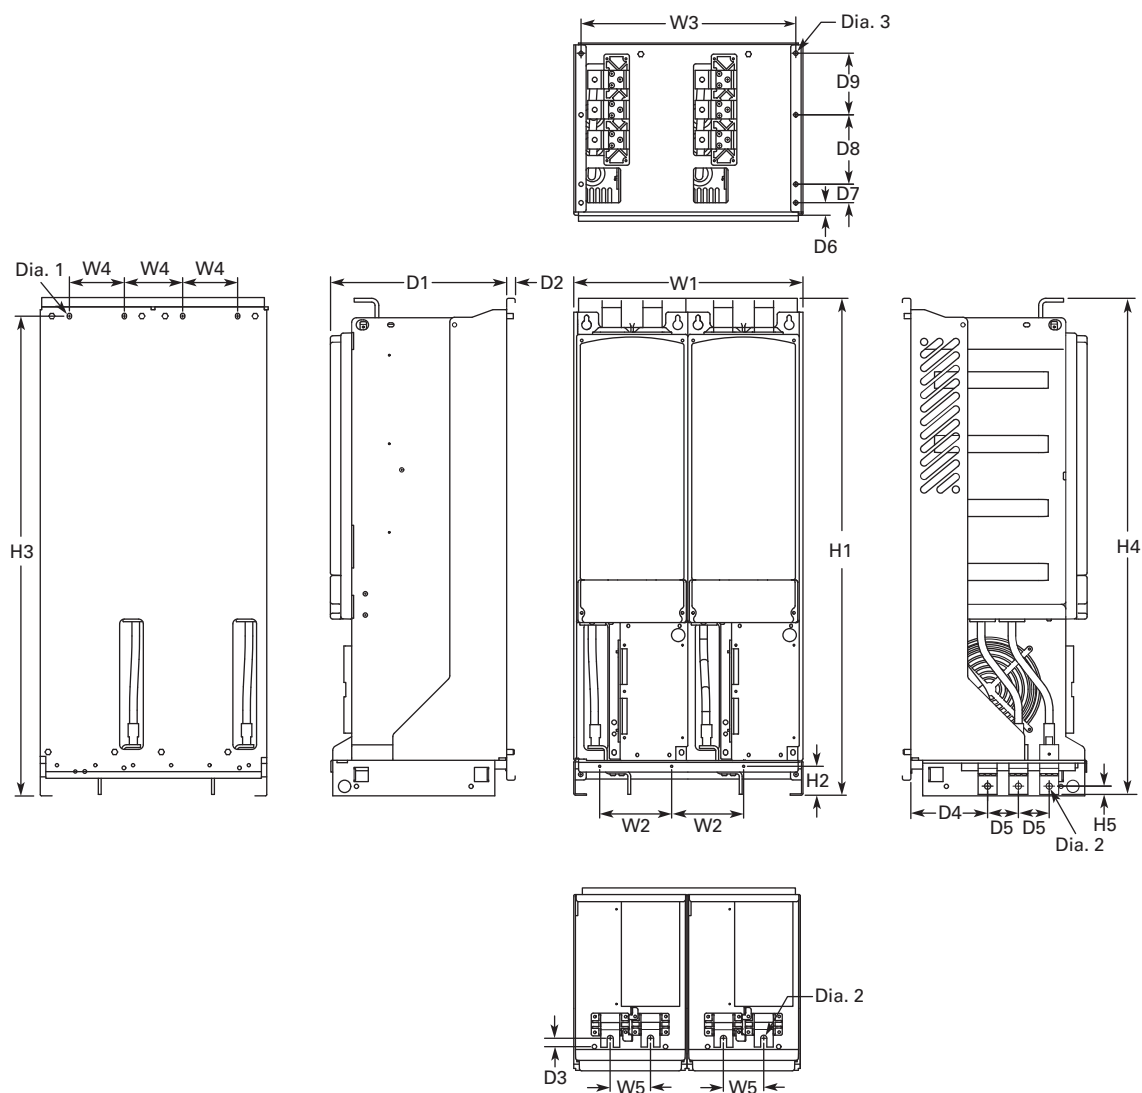

W1	W2	W3	W4	W5	H1	H2	H3	H4	H5	D1	D2	D3	D4	D5	D6	D7	D8	D9	Dia. 1	Dia. 2	Dia. 3	Weight Lbs (kg)
18.74 (476)	5.91 (150)	17.52 (445)	4.57 (116)	3.35 (85)	41.54 (1055)	2.46 (62.5)	39.86 (1012.5)	41.34 (1050)	0.69 (17.5)	14.69 (373)	0.51 (13)	0.73 (18.5)	6.42 (163)	2.56 (65)	1.06 (27)	1.57 (40)	5.91 (150)	5.24 (133)	0.35x0.59 (9x15)	0.51 (13)	0.37 (9.5)	295 (134)


Number of Input Units

480V Catalog Number	hp	Input Modules
SPX800A0-4A2N1	800	2

690V Catalog Number	hp	Input Modules
SPX800A0-5A2N1	800	2
SPX900A0-5A2N1	900	2
SPXH10A0-5A2N1	1000	2

Approximate Dimensions in Inches (mm)

FR13, Open Chassis Converter—900/1000 hp 480V

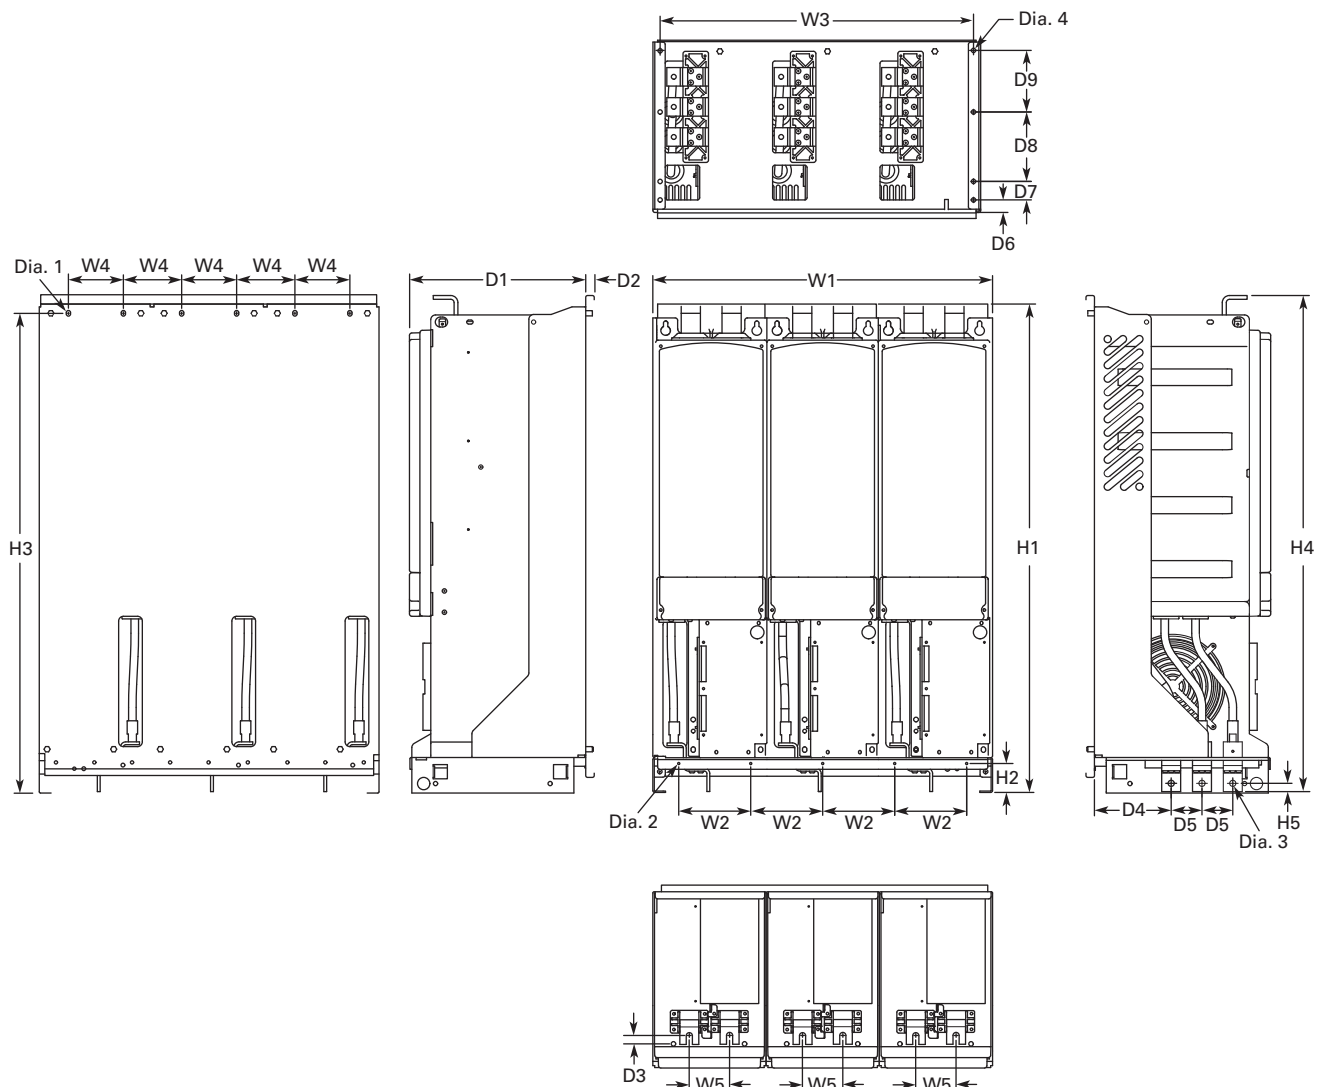

W1	W2	W3	W4	W5	H1	H2	H3	H4	H5	D1	D2	D3	D4	D5	D6	D7	D8	D9	Dia. 1	Dia. 2	Dia. 3	Dia. 4	Weight Lbs (kg)
27.87 (708)	5.91 (150)	26.65 (677)	4.57 (116)	3.35 (85)	41.54 (1055)	2.46 (62.5)	39.86 (1012.5)	41.34 (1050)	0.69 (17.5)	14.69 (373)	0.51 (13)	0.73 (18.5)	6.42 (163)	2.56 (65)	1.06 (27)	1.57 (40)	5.91 (150)	5.24 (133)	0.35x0.59 (9x15)	0.18 (4.6)	0.51 (13)	0.37 (9.5)	443 (201)

Number of Input Units


480V Catalog Number	hp	Input Modules
SPX900A0-4A2N1	900	3
SPXH10A0-4A2N1	1000	3

Approximate Dimensions in Inches (mm)

AC Choke Dimensions**Choke Types**

Catalog Number	Frame Size	Choke Type ^①
Voltage Range 380–500V		
SPX 250 4	FR10	CHK0400
SPX 300 4		CHK0520
SPX 350 4		CHK0520
SPX 400 4	FR11	2 x CHK0400
SPX 500 4		2 x CHK0400
SPX 550 4		2 x CHK0400
SPX 600 4	FR12	2 x CHK0520
SPX 650 4		2 x CHK0520
SPX 700 4		2 x CHK0520
SPX 800 4	FR13	2 x CHK0400
SPX 900 4		3 x CHK0520
SPX H10 4		3 x CHK0520
SPX H12 4	FR14	4 x CHK0520
SPX H16 4		6 x CHK0400


Catalog Number	Frame Size	Choke Type ^①
Voltage Range 525–690V		
SPX 200 5	FR10	CHK0261
SPX 250 5		CHK0400
SPX 300 5		CHK0400
SPX 400 5	FR11	CHK0520
SPX 450 5		CHK0520
SPX 500 5		2 x CHK0400
SPX 550 5	FR12	2 x CHK0400
SPX 600 5		2 x CHK0400
SPX 700 5		2 x CHK0400
SPX 800 5	FR13	2 x CHK0400
SPX 900 5		2 x CHK0400
SPX H10 5		2 x CHK0400
SPX H13 5	FR14	4 x CHK0400
SPX H15 5		6 x CHK0400

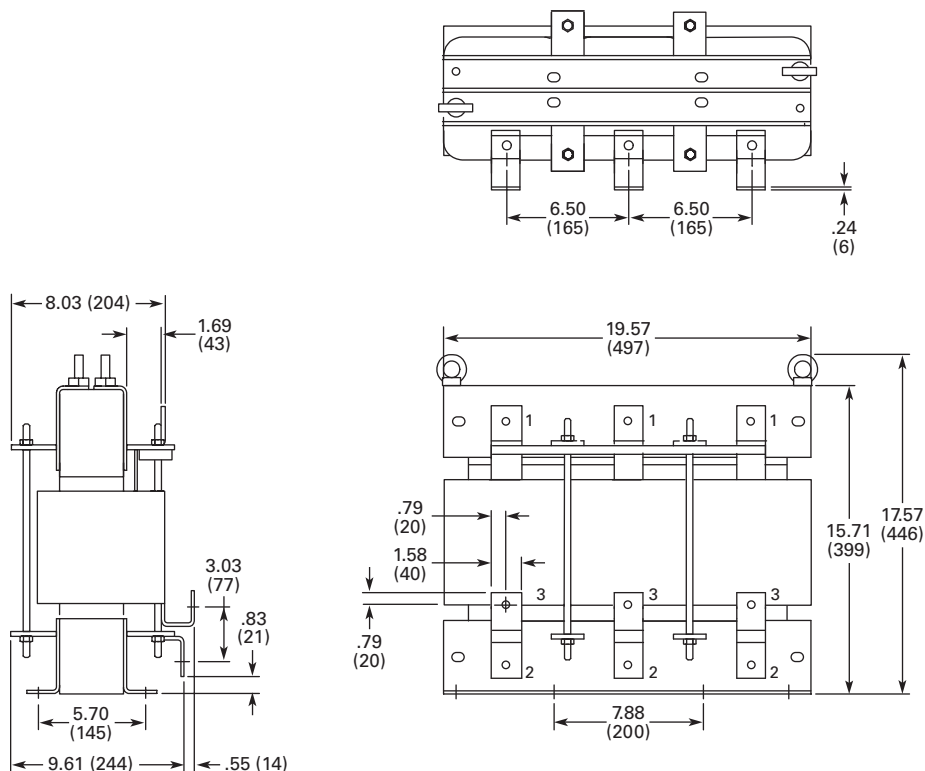CHK0520**Note**


① Chokes are provided with all FR10–FR14 drives.

Approximate Dimensions in Inches (mm)

CHK0400

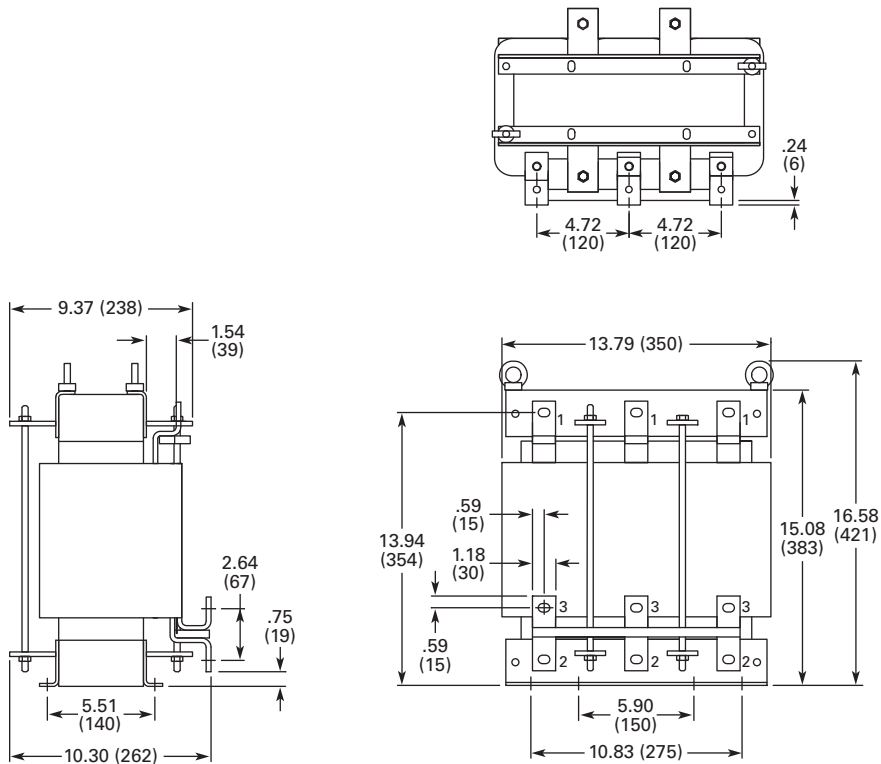


CHK0261

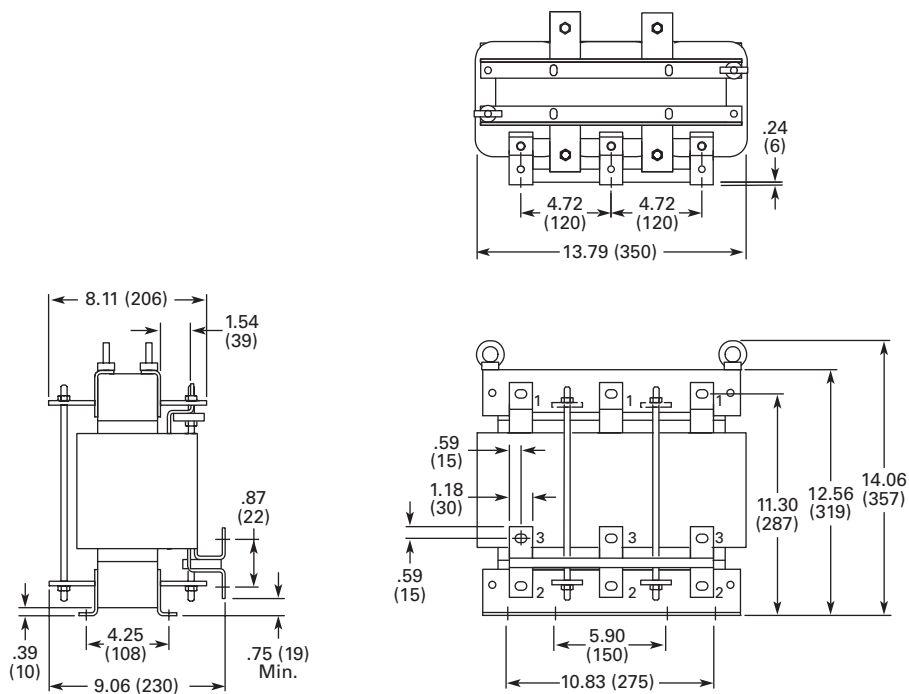

SVX9000 Enclosed Drives

2

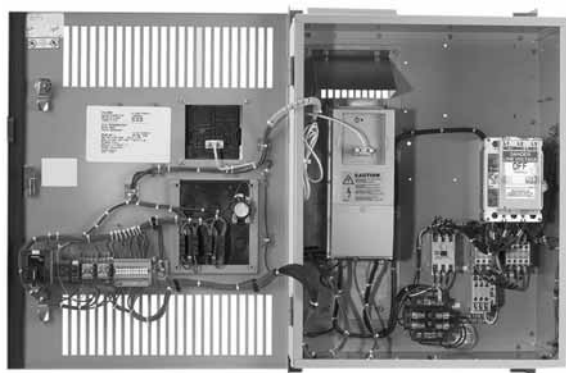

Contents

Description

Description	Page
SVX9000 Open Drives	V6-T2-17
SVX9000 Enclosed Drives	
Product Identification	V6-T2-53
Catalog Number Selection	V6-T2-54
Product Selection	V6-T2-55
Options	V6-T2-59
Technical Data and Specifications	V6-T2-65
Wiring Diagram	V6-T2-66
Dimensions	V6-T2-67
SVX9000 VFD Pump Panels	V6-T2-78

SVX9000 Enclosed Drives

Product Description

- **Standard Enclosed**—covers a wide range of the most commonly ordered options. Pre-engineering eliminates the lead time normally associated with customer specific options.
- **Modified Standard Enclosed**—applies to specific customer requirements that vary from the standard enclosed offering, such as the need for an additional indicating light or minor modifications to drawings. *Consult your Eaton representative for assistance in pricing and lead time.*
- **Custom Engineered**—for those applications with more unique or complex requirements, these are individually engineered to the customer's needs. *Consult your Eaton representative for assistance in pricing and lead time.*


Features

- NEMA Type 1/IP21 or NEMA Type 12/IP54 enclosures
- Input voltage: 208V, 230V, 480V and 575V (consult factory)
- Complete range of control, network and power options
- Horsepower range:
 - 208V—3/4 to 100 hp I_H ; 1 to 100 hp I_L
 - 230V—3/4 to 100 hp I_H ; 1 to 100 hp I_L
 - 480V—1 to 700 hp I_H ; 1-1/2 to 800 hp I_L
- HMCP padlockable

Standards and Certifications

- UL Listed
- cUL Listed

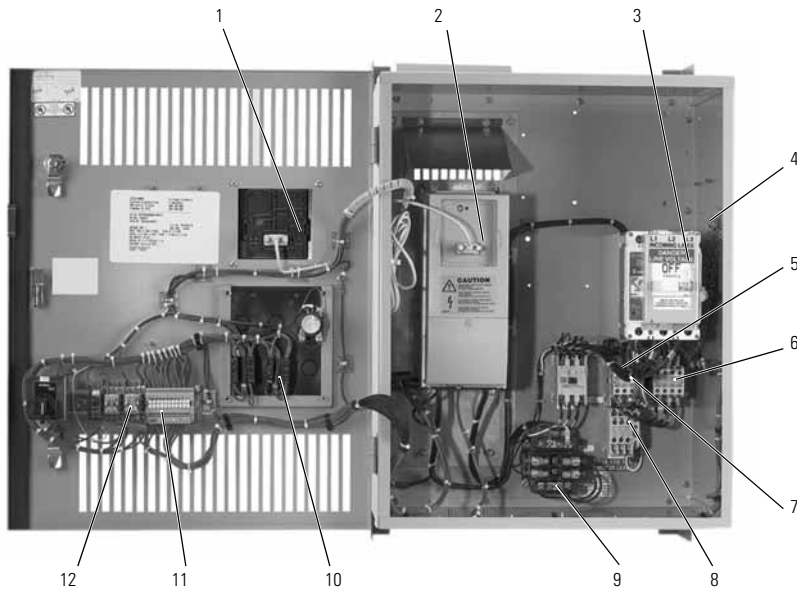


Product Identification**Enclosed 9000X Series Drive**

- | | | |
|---|---|--|
| 1 Door mounted keypad (included as standard with bypass option) | 6 Output contactor
• Option PE (included as standard with bypass option) | 9 115V control transformer
• Option KB |
| 2 SVX9000 variable frequency drive | 7 Bypass contactor
• Option RB
• Option RA | 10 Bypass pilot lights and selector switches
• Option RB
• Option RA
• Option L2
• Option KF |
| 3 Input disconnect (HMCP)
• Option P1 | 8 Overload relay
• Option PH
• Option PI | 11 Customer control and signal connection terminal block |
| 4 Input line fuses
• Option P3 | | 12 Control relay |
| 5 Input contactor (included as standard with bypass option) | | |

Catalog Number Selection

2

SVX9000 Enclosed NEMA Type 1/IP21 and NEMA Type 12/IP54 Drives

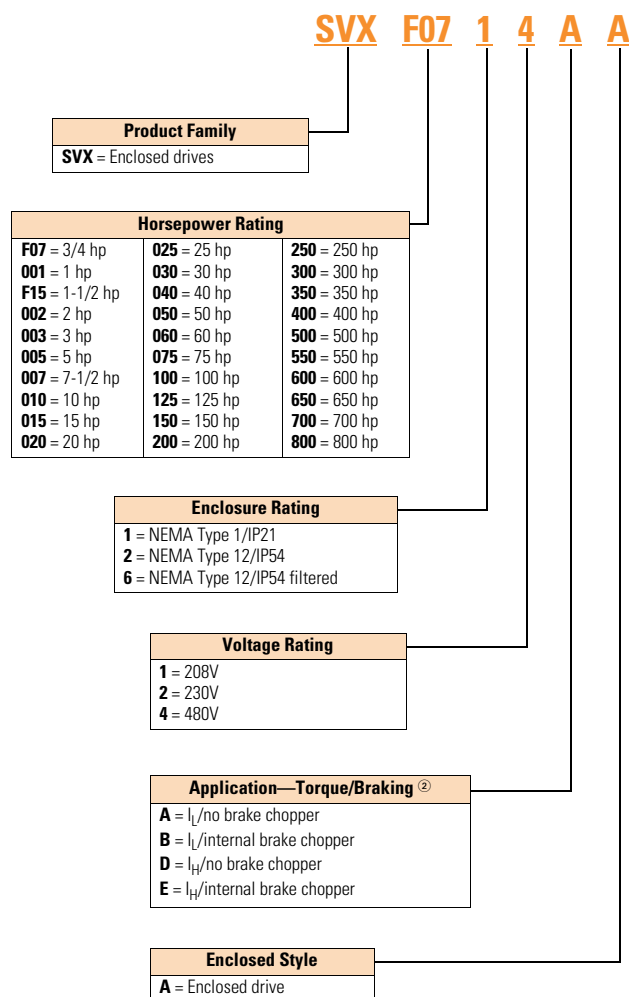

Build Alphabetically and Numerically

Enclosed Options ^{①④⑤}		Type
K1	Door-mounted speed potentiometer ^③	Control
K2	Door-mounted speed potentiometer with HOA selector switch ^③	Control
K3	3–15 psig follower	Control
K4	HAND/OFF/AUTO switch (22 mm)	Control
K5	MANUAL/AUTO ref switch (22 mm)	Control
K6	START/STOP pushbuttons (22 mm)	Control
KF	115V control transformer (550 VA)	Control
K0	Bypass test switch for RA and RB	Addl. bypass
	Standard elapsed time meter	Control
L1	Power on and fault pilot lights	Light
L2	Bypass pilot lights for RA, RB bypass options	Addl. bypass
LA	Green RUN light (22 mm)	Light
LD	Green STOP light (22 mm)	Light
LE	Red RUN light	Light
LF	Red STOP light (22 mm)	Light
LJ	White power on light (22 mm)	Light
LU	Misc. light (22 mm)	Light
P1	Input disconnect (HMCP) 100 kAIC	Input
P2	Disconnect switch ^⑦	Input
P3	Input line fuses (200 kAIC)	Input
P7	Input power surge protection	Input
PE	Output contactor	Output
PF	Output filter	Output
PG	MotoRx (up to 600 ft) 1000 V/μS DV/DT filter	Output
PH	Single overload relay	Output
PI	Dual overload relays	Output
PN	Dual overloads for bypass	Addl. bypass
RA	Manual HOA bypass controller	Bypass
RB	Manual IOB bypass controller	Bypass
RC	Auto transfer HOA bypass controller	Bypass
RD	Auto transfer IOB bypass controller	Bypass
S5	Floor stand 22 in	Enclosure
S6	Floor stand 12 in	Enclosure
S7	10 in expansion	Enclosure
S8	20 in expansion	Enclosure
S9	Space heater	Enclosure
Communication Options ^⑥		
C2 = Modbus	C6 = CanOpen (slave)	CA = Johnson Controls N2
C3 = Profibus DP	C7 = DeviceNet	CI = Modbus TCP
C4 = LonWorks	C8 = Modbus (D9 type connector)	CJ = BACnet
C5 = Profibus DP (D9 connector)		CK = Ethernet IP
		C3 = RS-232 with D9 connection
Control Options		
B1 = 6 DI, 1 ext +24 Vdc/EXT +24 Vdc	B5 = 3 RO (NO)	
B2 = 1 RO (NC-NO), 1 RO (NO), 1 therm	B8 = 1 ext +24 Vdc/EXT +24 Vdc, 3 Pt100	
B4 = 1 AI (mA isolated), 2 AO (mA isolated), 1 ext +24 Vdc/EXT +24 Vdc	B9 = 1 RO (NO), 5 DI 42–240 Vac input	
Engineered Options		
HT	High temperature rating for 50°C (FR10 and above) ^⑧	
VB	Varnished boards	

Notes

- ① Local/remote keypad is included as the standard control panel.
- ② Brake chopper is a factory installed option only, see drive options on **Page V6-T2-18**. External dynamic braking resistors not included. Consult factory.
- ③ Includes local/remote speed reference switch.
- ④ Some options are voltage and/or horsepower specific. Consult your Eaton representative for details.
- ⑤ See **Pages V6-T2-61** and **V6-T2-62** for descriptions.
- ⑥ See **Pages V6-T2-59** and **V6-T2-60** for complete descriptions.
- ⑦ Applicable only with FR10 and FR11 freestanding designs.
- ⑧ Consult Eaton for availability.

Product Selection

When Ordering

- Select a base catalog number that meets the application requirements—nominal horsepower, voltage and enclosure rating (the enclosed drive's continuous output amp rating should be equal to or greater than the motor's full load amp rating). The base enclosed package includes a standard drive, door mounted local/remote keypad and enclosure.
- If dynamic brake chopper or control/communication option is desired, change the appropriate code in the base catalog number.
- Select enclosed options. Add the codes as suffixes to the base catalog number in alphabetical and numeric order.
- **Read all footnotes.**

208V Drives

SVX9000 Enclosed Drives



Input Base Drives

NEMA Type 1/IP21					NEMA Type 12/IP54	
Enclosure Size ①	hp	Current (A)	Frame Size	Base Catalog Number ②	Frame Size	Base Catalog Number ②
High Overload Drive and Enclosure						
0	3/4	3.7	4	SVXF0711EA	4	SVXF0721EA
	1	4.8		SVX00111EA		SVX00121EA
	1-1/2	6.6		SVXF1511EA		SVXF1521EA
	2	7.8		SVX00211EA		SVX00221EA
	3	11		SVX00311EA		SVX00321EA
0	5	17.5	5	SVX00511EA	5	SVX00521EA
	7-1/2	25		SVX00711EA		SVX00721EA
1	10	31	6	SVX01011EA	6	SVX01021EA
	15	48		SVX01511EA		SVX01521EA
2	20	61	7	SVX02011DA	7	SVX02021DA
	25	75		SVX02511DA		SVX02521DA
	30	88		SVX03011DA		SVX03021DA
3	40	114	8	SVX04011DA	8	SVX04021DA
4	50	143	8	SVX05011DA	8	SVX05021DA
5	60	170	8	SVX06011DA	8	SVX06021DA
	75	211		SVX07511DA		SVX07521DA
	100	273		SVX10011DA		SVX10021DA
Low Overload Drive and Enclosure						
0	1	4.8	4	SVX00111BA	4	SVX00121BA
	1-1/2	6.6		SVXF1511BA		SVXF1521BA
	2	7.8		SVX00211BA		SVX00221BA
	3	11		SVX00311BA		SVX00321BA
	5	17.5		SVX00511BA		SVX00521BA
	7-1/2	25		SVX00711BA		SVX00721BA
	10	31		SVX01011BA		SVX01021BA
1	15	48	6	SVX01511BA	6	SVX01521BA
	20	61		SVX02011BA		SVX02021BA
2	25	75	7	SVX02511AA	7	SVX02521AA
	30	88		SVX03011AA		SVX03021AA
	40	114		SVX04011AA		SVX04021AA
3	50	—	8	SVX05011AA	8	SVX05021AA
4	60	170	8	SVX06011AA	8	SVX06021AA
5	③	205 ③	8	SVX07511AA	8	SVX07521AA
	③	261 ③		9		SVX10011AA

Notes

For brake chopper options, see **Page V6-T2-63**.

① See enclosure dimensions starting on **Page V6-T2-67**.

② Includes drive, local/remote keypad and enclosure.

③ These units are current rated (75 I_L hp 205 amps, 100 I_L hp 261 amps). They are not hp rated.

230V Drives

SVX9000 Enclosed Drives

Input Base Drives



NEMA Type 1/IP21					NEMA Type 12/IP54	
Enclosure Size ①	hp	Current (A)	Frame Size	Base Catalog Number ②	Frame Size	Base Catalog Number ②
High Overload Drive and Enclosure						
0	3/4	3.7	4	SVXF0712EA	4	SVXF0722EA
	1	4.8		SVX00112EA		SVX00122EA
	1-1/2	6.6		SVXF1512EA		SVXF1522EA
	2	7.8	5	SVX00212EA		SVX00222EA
	3	11		SVX00312EA		SVX00322EA
	5	17.5		SVX00512EA	5	SVX00522EA
		7-1/2	25	SVX00712EA		SVX00722EA
1	10	31	6	SVX01012EA	6	SVX01022EA
	15	48		SVX01512EA		SVX01522EA
2	20	61	7	SVX02012DA	7	SVX02022DA
	25	75		SVX02512DA		SVX02522DA
	30	88		SVX03012DA		SVX03022DA
3	40	114	8	SVX04012DA	8	SVX04022DA
4	50	140	8	SVX05012DA	8	SVX05022DA
5	60	170	8	SVX06012DA	8	SVX06022DA
	75	205	9	SVX07512DA	9	SVX07522DA
	100	261	SVX10012DA		SVX10022DA	
Low Overload Drive and Enclosure						
0	1	4.8	4	SVX00112BA	4	SVX00122BA
	1-1/2	6.6		SVXF1512BA		SVXF1522BA
	2	7.8		SVX00212BA		SVX00222BA
	3	11	5	SVX00312BA		SVX00322BA
	5	17.5		SVX00512BA	5	SVX00522BA
	7-1/2	25		SVX00712BA		SVX00722BA
		10	31	SVX01012BA		SVX01022BA
1	15	48	6	SVX01512BA	6	SVX01522BA
	20	61		SVX02012BA		SVX02022BA
2	25	75	7	SVX02512AA	7	SVX02522AA
	30	88		SVX03012AA		SVX03022AA
	40	114		SVX04012AA		SVX04022AA
3	50	140	8	SVX05012AA	8	SVX05022AA
4	60	170	8	SVX06012AA	8	SVX06022AA
5	75	205	8	SVX07512AA	8	SVX07522AA
	③	261 ③	9	SVX10012AA	9	SVX10022AA

NotesFor brake chopper options, see **Page V6-T2-63**.① See enclosure dimensions starting on **Page V6-T2-67**.

② Includes drive, local/remote keypad and enclosure.

③ This unit is current rated (100 I_L hp 100 amps, 261 I_L hp). It is not hp rated.

480V Drives

SVX9000 Enclosed Drives



Input Base Drives

NEMA Type 1/IP21					NEMA Type 12/IP54	
Enclosure Size ①	hp	Current (A)	Frame Size	Base Catalog Number ②	Frame Size	Base Catalog Number ②
High Overload Drive and Enclosure						
0	1	2.2	4	SVX00114EA	4	SVX00124EA
	1-1/2	3.3		SVXF1514EA		SVXF1524EA
	2	4.3		SVX00214EA		SVX00224EA
	3	5.6		SVX00314EA		SVX00324EA
	5	7.6		SVX00514EA		SVX00524EA
	7-1/2	12	5	SVX00714EA	5	SVX00724EA
	10	16		SVX01014EA		SVX01024EA
	15	23		SVX01514EA		SVX01524EA
1	20	31	6	SVX02014EA	6	SVX02024EA
	25	38		SVX02514EA		SVX02524EA
	30	46		SVX03014EA		SVX03024EA
2	40	61	7	SVX04014DA	7	SVX04024DA
	50	72		SVX05014DA		SVX05024DA
	60	87		SVX06014DA		SVX06024DA
3	75	105	8	SVX07514DA	8	SVX07524DA
	100	140		SVX10014DA		SVX10024DA
4	125	170	8	SVX12514DA	8	SVX12524DA
5	150	205	9	SVX15014DA	9	SVX15024DA
	200	245		SVX20014DA		SVX20024DA
6, 8 ③④	250	300	10	SVX25014DA	10	SVX25064DA
	300	385		SVX30014DA		SVX30064DA
	350	460		SVX35014DA		SVX35064DA
8, 9 ④⑤	400	520	11	SVX40014DA	11	SVX40064DA
	500	590		SVX50014DA		SVX50064DA
	550	650		SVX55014DA		SVX55064DA
⑥	600	730	12	SVX60014DA	12	SVX60064DA
	650	820		SVX65014DA		SVX65064DA
	700	920		SVX70014DA		SVX70064DA

Notes

For brake chopper options, see **Page V6-T2-63**.

① See enclosure dimensions starting on **Page V6-T2-67**.

② Includes drive, local/remote keypad and enclosure.

③ The smaller enclosure Size 6 accommodates only power options, input disconnect (P1) and input line fuses (P3). Bypass and other options require Size 8. Adding any standard control option will not require the larger enclosure.

④ For other options, consult factory.

⑤ The smaller enclosure Size 8 accommodates only power options, input disconnect (P1) and input line fuses (P3). Bypass and other options require Size 9. Adding any standard control option will not require the larger enclosure.

⑥ Consult Eaton.

SVX9000 Enclosed Drives

2



Input Base Drives, continued

NEMA Type 1/IP21					NEMA Type 12/IP54	
Enclosure Size ^①	hp	Current (A)	Frame Size	Base Catalog Number ^②	Frame Size	Base Catalog Number ^②
Low Overload Drive and Enclosure						
0	1-1/2	3.3	4	SVXF1514BA	4	SVXF1524BA
	2	4.3		SVX00214BA		SVX00224BA
	3	5.6		SVX00314BA		SVX00324BA
	5	7.6		SVX00514BA		SVX00524BA
	7-1/2	12		SVX00714BA		SVX00724BA
	10	16	5	SVX01014BA	5	SVX01024BA
	15	23		SVX01514BA		SVX01524BA
	20	31		SVX02014BA		SVX02024BA
1	25	38	6	SVX02514BA	6	SVX02524BA
	30	46		SVX03014BA		SVX03024BA
	40	61		SVX04014BA		SVX04024BA
2	50	72	7	SVX05014AA	7	SVX05024AA
	60	87		SVX06014AA		SVX06024AA
	75	105		SVX07514AA		SVX07524AA
3	100	140	8	SVX10014AA	8	SVX10024AA
4	125	170	8	SVX12514AA	8	SVX12524AA
	150	205		SVX15014AA		SVX15024AA
5	200	261	9	SVX20014AA	9	SVX20024AA
	250	300		SVX25014AA		SVX25024AA
6, 8 ^{③④}	300	385	10	SVX30014AA	10	SVX30064AA
	350	460		SVX35014AA		SVX35064AA
	400	520		SVX40014AA		SVX40064AA
8, 9 ^{④⑤}	500	590	11	SVX50014AA	11	SVX50064AA
	550	650		SVX55014AA		SVX55064AA
	600	730		SVX60014AA		SVX60064AA
⑥	650	820	12	SVX65014AA	12	SVX65064AA
	700	920		SVX70014AA		SVX70064AA
	800	1030		SVX80014AA		SVX80064AA

NotesFor brake chopper options, see **Page V6-T2-63**.^① See enclosure dimensions starting on **Page V6-T2-67**.^② Includes drive, local/remote keypad and enclosure.^③ The smaller enclosure Size 6 accommodates only power options, input disconnect (P1) and input line fuses (P3). Bypass and other options require Size 8. Adding any standard control option will not require the larger enclosure.^④ For other options, consult factory.^⑤ The smaller enclosure Size 8 accommodates only power options, input disconnect (P1) and input line fuses (P3). Bypass and other options require Size 9. Adding any standard control option will not require the larger enclosure.^⑥ Consult Eaton.


Options

9000X Series Option Board Kits

The 9000X Series drives can accommodate a wide selection of expander and adapter option boards to customize the drive for your application needs. The drive's control unit is designed to accept a total of five option boards.

The 9000X Series factory installed standard board configuration includes an A9 I/O board and an A2 relay output board, which are installed in slots A and B.

Option Boards



Option Board Kits

Option Kit Description ①	Allowed Slot Locations ②	Field Installed Catalog Number	Factory Installed Option Designator	SVX Ready Programs						
				Basic	Local/ Remote	Standard	MSS	PID	Multi-P.	PFC
Standard I/O Cards										
2 RO (NC-NO)	B	OPTA2	—	■	■	■	■	■	■	■
6 DI, 1 DO, 2 AI, 1AO, 1 +10 Vdc ref, 2 ext +24 Vdc/EXT +24 Vdc	A	OPTA9	—	■	■	■	■	■	■	■
Extended I/O Cards										
2 RO, therm—SPX only	B	OPTA3	A3	—	■	■	■	■	■	■
Encoder low volt +5V/15V/24V—SPX only	C	OPTA4	A4	—	■	■	■	■	■	■
Encoder high volt +15V/24V—SPX only	C	OPTA5	A5	—	■	■	■	■	■	■
Double encoder—SPX only	C	OPTA7	A7	■	■	■	■	■	■	■
6 DI, 1 DO, 2 AI, 1 AO—SPX only	A	OPTA8	A8	—	■	■	■	■	■	■
3 DI (encoder 10–24V), out +15V/+24V, 2 DO (pulse+direction)—SPX only	C	OPTAE	AE	■	■	■	■	■	■	■
6 DI, 1 ext +24 Vdc/EXT +24 Vdc	B, C, D , E	OPTB1	B1	—	—	—	—	—	■	■
1 RO (NC-NO), 1 RO (NO), 1 therm	B, C, D , E	OPTB2	B2	—	—	—	—	—	■	■
1 AI (mA isolated), 2 AO (mA isolated), 1 ext +24 Vdc/EXT +24 Vdc	B, C, D , E	OPTB4	B4	■	■	■	■	■	■	■
3 RO (NO)	B, C, D , E	OPTB5	B5	—	—	—	—	—	■	■
1 ext +24 Vdc/EXT +24 Vdc, 3 Pt100	B, C, D , E	OPTB8	B8	—	—	—	—	—	—	—
1 RO (NO), 5 DI 42–240 Vac input	B, C, D , E	OPTB9	B9	—	—	—	—	—	■	■
Communication Cards ③										
Modbus	D , E	OPTC2	C2	■	■	■	■	■	■	■
Modbus TCP	D , E	OPTCI	CI	■	■	■	■	■	■	■
BACnet	D , E	OPTCJ	CJ	■	■	■	■	■	■	■
Ethernet IP	D , E	OPTCK	CK	■	■	■	■	■	■	■
Johnson Controls N2	D , E	OPTC2	CA	—	—	—	—	—	—	—
Profibus DP	D , E	OPTC3	C3	■	■	■	■	■	■	■
LonWorks	D , E	OPTC4	C4	■	■	■	■	■	■	■
Profibus DP (D9 connector)	D , E	OPTC5	C5	■	■	■	■	■	■	■
CanOpen (slave)	D , E	OPTC6	C6	■	■	■	■	■	■	■
DeviceNet	D , E	OPTC7	C7	■	■	■	■	■	■	■
Modbus (D9 type connector)	D , E	OPTC8	C8	■	■	■	■	■	■	■
Adapter—SPX only	D , E	OPTD1	D1	■	■	■	■	■	■	■
Adapter—SPX only	D , E	OPTD2	D2	■	■	■	■	■	■	■
RS-232 with D9 connection	D , E	OPTD3	D3	■	■	■	■	■	■	■
Keypad										
9000X Series local/remote keypad	—	KEYPAD-LOC/REM	—	—	—	—	—	—	—	—
9000X Series remote mount keypad kit (keypad not included)	—	OPTRMT-KIT-9000X	—	—	—	—	—	—	—	—
9000X Series RS-232 cable, 13 ft	—	PP00104	—	—	—	—	—	—	—	—

Notes

① AI = Analog Input; AO = Analog Output, DI = Digital Input, DO = Digital Output, RO = Relay Output

② Option card must be installed in one of the slots listed for that card. Slot indicated in bold is the preferred location.

③ OPTC2 is a multi-protocol option card.

Modbus RTU Network Communications

The Modbus Network Card OPTC2 is used for connecting the 9000X Drive as a slave on a Modbus network. The interface is connected by a 9-pin DSUB connector (female) and the baud rate ranges from 300 to 19200 baud. Other communication parameters include an address range from 1 to 247; a parity of None, Odd or Even; and the stop bit is 1.

Profibus Network Communications

The Profibus Network Card OPTC3 is used for connecting the 9000X Drive as a slave on a Profibus-DP network. The interface is connected by a 9-pin DSUB connector (female). The baud rates range from 9.6K baud to 12M baud, and the addresses range from 1 to 127.

LonWorks Network Communications

The LonWorks Network Card OPTC4 is used for connecting the 9000X Drive on a LonWorks network. This interface uses Standard Network Variable Types (SNVT) as data types. The channel connection is achieved using a FTT-10A Free Topology transceiver via a single twisted transfer cable. The communication speed with LonWorks is 78 kBits/s.

CanOpen (Slave) Communications

The CanOpen (Slave) Network Card OPTC6 is used for connecting the 9000X Drive to a host system. According to ISO11898 standard cables to be chosen for CAN bus should have a nominal impedance of 120 ohms, and specific line delay of nominal 5 nS/m. 120 ohms line termination resistors required for installation.

DeviceNet Network Communications

The DeviceNet Network Card OPTC7 is used for connecting the 9000X Drive on a DeviceNet Network. It includes a 5.08 mm pluggable connector. Transfer method is via CAN using a two-wire twisted shielded cable with two-wire bus power cable and drain. The baud rates used for communication include 125K baud, 250K baud and 500K baud.

Johnson Controls Metasys N2 Network Communications

The OPTC2 fieldbus board provides communication between the 9000X Drive and a Johnson Controls Metasys™ N2 network. With this connection, the drive can be controlled, monitored and programmed from the Metasys system. The N2 fieldbus is available as a factory installed option and as a field installable kit.

Modbus/TCP Network Communications

The Modbus/TCP Network Card OPTC1 is used for connecting the 9000X Drive to Ethernet networks utilizing Modbus protocol. It includes an RJ-45 pluggable connector. This interface provides a selection of standard and custom register values to communicate drive parameters. The board supports 10 Mbps and 100 Mbps communication speeds. The IP address of the board is configurable over Ethernet using a supplied software tool.

BACnet Network Communications

The BACnet Network Card OPTCJ is used for connecting the 9000X Drive to BACnet networks. It includes a 5.08 mm pluggable connector. Data transfer is Master-Slave/Token Passing (MS/TP) RS-485. This interface uses a collection of 30 Binary Value Objects (BVOs) and 35 Analog Value Objects (AVOs) to communicate drive parameters. The card supports 9.6, 19.2 and 38.4 Kbaud communication speeds and supports network addresses 1–127.

Ethernet/IP Network Communications

The Ethernet/IP Network Card OPTCK is used for connecting the 9000X Drive to Ethernet/Industrial Protocol networks. It includes an RJ-45 pluggable connector. The interface uses CIP objects to communicate drive parameters (CIP is “Common Industrial Protocol”, the same protocol used by DeviceNet). The board supports 10 Mbps and 100 Mbps communication speeds. The IP address of the board is configurable by Static, BOOTP and DHCP methods.

SVX Conversion Kit**Frame 4–7** ⓘ

Frame Size	Enclosure Size	Delivery Code	Catalog Number
FR4	0	FB10	OPTCON-SVXFR4-SZ00
	1		OPTCON-SVXFR4-SZ01
FR5	0	FB10	OPTCON-SVXFR5-SZ00
	1		OPTCON-SVXFR5-SZ01
FR6	1	FB10	OPTCON-SVXFR6-SZ01
	2		OPTCON-SVXFR6-SZ02
FR7	2	FB10	OPTCON-SVXFR7-SZ02

Note

ⓘ The kit consists of a flange kit, adapter plate(s), hardware, remote keypad kit and SVX9000 decal.

Control/Communication Option Descriptions

For availability, see Product Selection for base drive voltage required.

Available Control/Communications Options

Option	Description	Option Type
K1	Door-Mounted Speed Potentiometer —Provides the SVX9000 with the ability to adjust the frequency reference using a door-mounted potentiometer. This option uses the 10 Vdc reference to generate a 0–10V signal at the analog voltage input signal terminal. When the HOA bypass option is added, the speed is controlled when the HOA switch is in the HAND position. Without the HOA bypass option, a two-position switch (labeled local/remote) is provided on the keypad to select speed reference from the speed potentiometer or a remote speed signal.	Control
K2	Door-Mounted Speed Potentiometer with HOA Selector Switch —Provides the SVX9000 with the ability to start/stop and adjust the speed reference from door-mounted control devices or remotely from customer supplied inputs. In HAND position, the drive will start and the speed is controlled by the door-mounted speed potentiometer. The drive will be disabled in the OFF position. When AUTO is selected, the drive run and speed control commands are via user-supplied dry contact and 4–20 mA signal.	Control
K3	3–15 PSIG Follower —Provides a pneumatic transducer which converts a 3–15 psig pneumatic signal to either 0–8 Vdc or a 1–9 Vdc signal interface with the SVX9000. The circuit board is mounted on the inside of the front enclosure panel and connects to the user's pneumatic control system via 6 ft (1.8m) of flexible tubing and a 1/4 in (6.4 mm) brass tube union.	Control
K4	HAND/OFF/AUTO Switch for Non-Bypass Configurations —Provides a three-position selector switch that allows the user to select either a HAND or AUTO mode of operation. HAND mode is defaulted to k (keypad operation, and AUTO mode is defaulted to control from an external terminal source. These modes of operation can be configured via programming to allow for alternate combinations of start and speed sources. Start and speed sources include keypad, I/O and fieldbus.	Control
K5	MANUAL/AUTO Speed Reference Switch —Provides a door-mounted selector switch for MANUAL/AUTO speed reference.	Control
K6	START/STOP Pushbuttons —Provide door-mounted START and STOP pushbuttons for either bypass or non-bypass configurations.	Control
KB	115V Control Transformer, 550 VA —Provides a fused control power transformer with additional 550 VA at 115V for customer use.	Control
KF	Bypass Test Switch for RB and RA —Allows the user to energize the AF drive for testing while operating the motor on the bypass controller. The test switch is mounted on the inside of the enclosure door.	Addl. bypass
K0	Standard Elapsed Time Meter —Provides a door-mounted elapsed run time meter.	Control
L1	Power On and Fault Pilot Lights —Provide a white power on light that indicates power to the enclosed cabinet and a red fault light that indicates a drive fault has occurred.	Light
L2	Bypass Pilot Lights for RB, RA Bypass Options —A green light indicates when the motor is running in inverter mode and an amber light that indicates when the motor is running in bypass mode. The lights are mounted on the enclosure door, above the switches.	Addl. bypass
LA	Green RUN Light (22 mm) —Provides a green run light that indicates the drive is running.	Light
LD	Green STOP Light (22 mm) —Provides a green light that indicates the drive is stopped.	Light
LE	Red RUN Pilot Light (22 mm) —Provides a red run pilot light that indicates the drive is running.	Light
LF	Red STOP Light (22 mm) —Provides a red stop light that indicates the drive is stopped.	Light
LJ	White Power On Light (22 mm) —The 22 mm white light that illuminates when the drive assembly is powered.	Light
LU	Misc. Light (22 mm) —Provides a misc. "user defined" pilot light. User to define light function and color.	Light
P1	Input Disconnect Assembly Rated to 100 kAIC —High Interrupting Motor Circuit Protector (HMCP) that provides a means of short circuit protection for the power cables between it and the SVX9000, and protection from high-level ground faults on the power cable. Allows a convenient means of disconnecting the SVX9000 from the line and the operating mechanism can be padlocked in the OFF position. This is factory mounted in the enclosure.	Input
P2	Disconnect Switch —Disconnect switch option is applicable only with NEMA Type 1/IP21 and NEMA Type 12/IP54 freestanding drives. Allows a convenient means of disconnecting the SVX9000 from the line, and the operating mechanism can be padlocked in the OFF position. This is factory-mounted in the enclosure.	Input
P3	Input Line Fuses Rated to 200 kAIC —Provides high-level fault protection of the SVX9000 input power circuit from the load side of the fuses to the input side of the power transistors. This option consists of three 200 kA fuses, which are factory mounted in the enclosure.	Input
P7	MOV Surge Suppressor —Provides a Metal Oxide Varistor (MOV) connected to the line side terminals and is designed to clip line side transients.	Input
PE	Output Contactor —Provides a means for positive disconnection of the drive output from the motor terminals. The contactor coil is controlled by the drive's run or permissive logic. NC and NO auxiliary contacts rated at 10A, 600 Vac are provided for customer use. Bypass options RB and RA include an output contactor as standard. This option includes a low VA 115 Vac fused control power transformer and is factory mounted in the enclosure.	Output
PF	Output Filter —Used to reduce the transient voltage (DV/DT) at the motor terminals. The output filter is recommended for cable lengths exceeding 100 ft (30m) with a drive of 3 hp and above, for cable lengths of 33 ft (10m) with a drive of 2 hp and below, or for a drive rated at 525–690V. This option is mounted in the enclosure, and may be used in conjunction with a brake chopper circuit.	Output
PG	MotoRx (300–600 ft) 1000 V/μS DV/DT Filter —Used to reduce transient voltage (DV/DT) and peak voltages at the motor terminals. This option is comprised of a 0.5% line reactor, followed by capacitive filtering and an energy recovery/clamping circuit. Unlike the output filter (See option PF), the MotoRx recovers most of the energy from the voltage peaks, resulting in a lower voltage drop to the motor, and therefore conserving power. This option is used when the distance between a single motor and the drive is 300–600 ft (91–183m). <i>This option can not be used with the brake chopper circuit. The output filter (option PF) should be investigated as an alternative.</i>	Output
PH	Single Overload Relay —Uses a bimetallic overload relay to provide additional overload current protection to the motor on configurations without bypass options. It is included with the bypass configurations for overload current protection in the bypass mode. The overload relay is mounted within the enclosure, and is manually resettable. Heater pack included.	Output

For availability, see Product Selection for base drive voltage required.

2 Available Control/Communications Options, continued

Option	Description	Option Type
PI	Dual Overload Relays —This option is recommended when a single drive is operating two motors and overload current protection is needed for each of the motors. The standard configuration includes two bimetallic overload relays, each sized to protect a motor with 50% of the drive hp rating. For example, a 100 hp drive would include two overload relays sized to protect two 50 hp motors. The relays are mounted within the enclosure, and are manually resettable. Heater packs not included.	Output
PN	Dual Overloads for Bypass —This option is recommended when a single drive is operating two motors in the bypass mode and overload current protection is needed for each of the motors. The standard configuration includes two bimetallic overload relays, each sized to protect a motor with 50% of the drive hp rating. For example, a 100 hp drive would include two overload relays sized to protect two 50 hp motors. The relays are mounted within the enclosure, and are manually resettable.	Addl. bypass
RA	Manual HOA Bypass Controller —The manual HAND/OFF/AUTO (HOA)—3-contactor—bypass option provides a means of bypassing the SVX9000, allowing the AC motor to be operated at full speed directly from the AC supply line. This option consists of an input disconnect, a fused control power transformer, and a full voltage bypass starter with a door mounted HOA selector switch and an INVERTER/BYPASS switch. The HOA switch provides the ability to start and stop the drive in the inverter mode. For applications up to 100 hp, a Freedom Series IEC input contactor, a Freedom Series IEC output contactor, and a Freedom Series IEC starter with a bimetallic overload relay is included. For applications above 100 hp, an Advantage input contactor, an Advantage output contactor and an Advantage starter with electronic overload protection is included. The contactors are mechanically and electrically interlocked (see power diagram on Page V6-T2-66).	Bypass
RB	Manual IOB Bypass Controller —The manual INVERTER/OFF/BYPASS (IOB)—3-contactor—bypass option provides a means of bypassing the SVX9000, allowing the AC motor to be operated at full speed directly from the AC supply line. This option consists of an input disconnect, a fused control power transformer, and a full voltage bypass starter with a door mounted IOB selector switch. For applications up to 100 hp, a Freedom Series IEC input contactor, a Freedom Series IEC output contactor, and a Freedom Series IEC starter with a bimetallic overload relay is included. For applications above 100 hp, an Advantage input contactor, an Advantage output contactor and an Advantage starter with electronic overload protection is included. The contactors are mechanically and electrically interlocked (see power diagram on Page V6-T2-66).	Bypass
RC	Auto Transfer HOA Bypass Controller —The manual HAND/OFF/AUTO (HOA)—3-contactor—bypass option provides a means of bypassing the SVX9000, allowing the AC motor to be operated at full speed directly from the AC supply line. The circuitry provides an automatic transfer of the load to “across the line” operation after a drive trip. This option consists of an input disconnect, a fused control power transformer, and a full voltage bypass starter with a door mounted HOA selector switch and an INVERTER/BYPASS switch. The HOA switch provides the ability to start and stop the drive in either mode. For applications up to 100 hp, a Freedom Series IEC input contactor, a Freedom Series IEC output contactor, and a Freedom Series IEC starter with a bimetallic overload relay is included. For applications above 100 hp, an Advantage input contactor, an Advantage output contactor and an Advantage starter with electronic overload protection is included. The contactors are mechanically and electrically interlocked (see power diagram on Page V6-T2-66). Door-mounted pilot lights are provided which indicate bypass or inverter operation. A green light indicates when the motor is running in inverter mode and an amber light indicates when the motor is running in bypass mode. WARNING: The motor may restart when the overcurrent relay is reset when operating in bypass, unless the IOB selector switch is turned to the OFF position.	Bypass
RD	Auto Transfer IOB Bypass Controller —The auto INVERTER/OFF/BYPASS (IOB)—3-contactor—bypass option provides a means of bypassing the SVX9000, allowing the AC motor to be operated at full speed directly from the AC supply line. The circuitry provides an automatic transfer of the load to “across the line” operation after a drive trip. This option consists of an input disconnect, a fused control power transformer, and a full voltage bypass starter with a door mounted IOB selector switch. For applications up to 100 hp, a Freedom Series IEC input contactor, a Freedom Series IEC output contactor, and a Freedom Series IEC starter with a bimetallic overload relay is included. For applications above 100 hp, an Advantage input contactor, an Advantage output contactor and an Advantage starter with electronic overload protection is included. The contactors are mechanically and electrically interlocked (see power diagram on Page V6-T2-66). Door-mounted pilot lights are provided which indicate bypass or inverter operation. A green light indicates when the motor is running in inverter mode and an amber light indicates when the motor is running in bypass mode. WARNING: The motor may restart when the overcurrent relay is reset when operating in bypass, unless the IOB selector switch is turned to the OFF position.	Bypass
S5	Floor Stand 22 in —Converts a Size 1 or 2, normally wall mounted enclosure to a floor standing enclosure with a height of 22 in (558.8 mm).	Enclosure
S6	Floor Stand 12 in —Converts a Size 2, normally wall mounted enclosure to a floor standing enclosure with a height of 12 in (304.8 mm).	Enclosure
S7	10 in Expansion —In a Size 5 enclosure, the extension allows for bottom cable entry and additional space for customer mounted components. NOTE: Enclosure expansion rated NEMA Type 1/IP21 only.	Enclosure
S8	20 in Expansion —In a Size 5 enclosure, the extension allows for bottom cable entry and additional space for customer mounted components. When the output filter (option PF) is selected for a drive using a Size 5 enclosure, this expansion box is required and included in the option pricing. Enclosure expansion rated NEMA Type 1/IP21 only.	Enclosure
S9	Space Heater —Prevents condensation from forming in the enclosure when the drive is inactive or in storage. Includes a thermostat for variable temperature control. A 200W heater is installed in enclosures 0 and 1, and a 400W heater is installed in enclosures 2–5. Requires a customer supplied 115V remote supply source.	Enclosure

Enclosed Drive Options**Brake Chopper Options**

The brake chopper circuit option is used for applications that require dynamic braking. Dynamic braking resistors are not included with drive

purchase. Consult the factory for dynamic braking resistors which are supplied separately. Resistors are not UL Listed.

For brake chopper circuit selection and adder—NEMA Type 1/IP21, NEMA Type 12/IP54, consult the factory.

Conformal (Varnished) Coating ^②

Chassis Frame	Delivery Code
FR4	FP
FR5	FP
FR6	FP
FR7	FP
FR8	FP
FR9	FP
FR10	FP
FR11	FP
FR12	FP
FR13	FP
FR14	FP

208V and 230V Control Options—3/4–100 hp ^③

Description	Catalog Number Suffix
Door-mounted speed potentiometer	K1
Door-mounted speed potentiometer with HOA selector switch	K2
3–15 psig follower	K3
HAND/OFF/AUTO switch (22 mm)	K4
MANUAL/AUTO ref switch (22 mm)	K5
START/STOP pushbuttons (22 mm)	K6
115 Volt control transformer 550 VA	KB
Standard elapsed time meter	K0

480V Control Options—1–800 hp ^③

Description	Catalog Number Suffix
Door-mounted speed potentiometer	K1
Door-mounted speed potentiometer with HOA selector switch	K2
3–15 psig follower	K3
HAND/OFF/AUTO switch (22 mm)	K4
MANUAL/AUTO ref switch (22 mm)	K5
START/STOP pushbuttons (22 mm)	K6
115 Volt control transformer 550 VA	KB
Standard elapsed time meter	K0

208V and 230V Light Options—3/4–100 hp ^③

Description	Catalog Number Suffix
Power on/fault pilot lights (22 mm)	L1
Green RUN light (22 mm)	LA
Green STOP light (22 mm)	LD
Red RUN light (22 mm)	LE
Red STOP light (22 mm)	LF
Power on light (22 mm)	LJ
Misc. light (22 mm)	LU

480V Light Options—1–800 hp ^③

Description	Catalog Number Suffix
Power on/fault pilot lights (22 mm)	L1
Green RUN light (22 mm)	LA
Green STOP light (22 mm)	LD
Red RUN light (22 mm)	LE
Red STOP light (22 mm)	LF
Power on light (22 mm)	LJ
Misc. light (22 mm)	LU

Notes

- ① External dynamic braking resistors not included. Consult factory.
 ② See Product Selection on **Pages V6-T2-55 to V6-T2-58**, 208V, 230V and 480V. Consult the factory for adder.
 ③ Consult factory for adder information.

208V and 230V Bypass Options, 3/4–100 hp ^{①②}

Description	Catalog Number Suffix
Bypass test switch for RA, RB (and RC, RD—230V)	KF
Bypass pilot lights for RA, RB options	L2
Dual overloads for bypass	PN
Manual HOA bypass controller	RA
Manual IOB bypass controller	RB
Auto transfer HOA bypass controller	RC
Auto transfer IOB bypass controller	RD

480V Bypass Options, 1–800 hp ^{①②}

Description	Catalog Number Suffix
Bypass test switch for RA, RB, RC, RD	KF
Bypass pilot lights for RA, RB options	L2
Dual overloads for bypass	PN
Manual HOA bypass controller	RA
Manual IOB bypass controller	RB
Auto transfer HOA bypass controller	RC
Auto transfer IOB bypass controller	RD

208V and 230V Enclosure Options, Sizes 0–5 ^②

Description	Catalog Number Suffix
Floor stand 22 in (558.8 mm)	S5
Floor stand 12 in (304.8 mm)	S6
10 in (254 mm) expansion ^③	S7
20 in (508 mm) expansion	S8
Space heater ^④	S9

480V Enclosure Options, Sizes 0–9 ^②

Description	Catalog Number Suffix
Floor stand 22 in (558.8 mm)	S5
Floor stand 12 in (304.8 mm)	S6
10 in (254 mm) expansion ^③	S7
20 in (508 mm) expansion	S8
Space heater ^④	S9

Notes

- ^① See **Page V6-T2-62** for details.
- ^② Consult factory for adder information.
- ^③ See **Page V6-T2-67** for dimensions.
- ^④ Requires customer supplied 115 Vac supply.
- ^⑤ Not required for 208V and 230V applications.
- ^⑥ Output filter may be required whenever the distance from the drive to the motor exceeds 100 ft (30m). Refer to **Page V6-T2-61**, option **PF** for further details.”.
- ^⑦ Heater packs not included.
- ^⑧ Applicable with FR10 and FR11 freestanding designs only.

208V and 230V Power Options, 3/4–100 hp ^②

Description	Catalog Number Suffix
Input	
Input disconnect (HMCP) 100 kAIC	P1
Input line fuses 200 kAIC	P3
Input power surge protection	P7
Output	
Output contactor	PE
Output filter ^{⑤⑥}	PF
MotoRx (300–600 ft) 1000 V/μs DV/DT filter ^⑥	PG
Single overload relay ^⑦	PH
Dual overload relays ^⑦	PI

480V Power Options, 1–800 hp ^②

Description	Catalog Number Suffix
Input	
Input disconnect (HMCP) 100 kAIC	P1
Input line fuses 200 kAIC	P3
Input power surge protection	P7
Output	
Output contactor	PE
Output filter ^{⑤⑥}	PF
MotoRx (300–600 ft) 1000 V/μs DV/DT filter ^⑥	PG
Single overload relay ^⑦	PH
Dual overload relays ^⑦	PI

Input Options, 250–550 hp ^②

Description	Catalog Number Suffix
480V Only	
Load switch	P2 ^⑧

Technical Data and Specifications

9000X Enclosed Drives

Description	NEMA Type 1/IP21 or NEMA Type 12/IP54 Specification
Primary Design Features	
45–66 Hz input frequency	Standard
Output: AC volts maximum	Input voltage base
Output frequency range	0–320 Hz
Initial output current (I_H)	250% for 2 seconds
Overload (1 minute [I_H/I_L])	150%/110%
Enclosure space heater	Optional
Oversize enclosure	Standard
Output contactor	Optional
Bypass motor starter	Optional
Listings	UL, cUL
Protection Features	
Incoming line fuses	Optional
AC input circuit disconnect	Optional
Line reactors	Standard
Phase rotation insensitive	Standard
EMI filter	Standard
Input phase loss protection	Standard
Input overvoltage protection	Standard
Line surge protection	Standard
Output short circuit protection	Standard
Output ground fault protection	Standard
Output phase protection	Standard
Overtemperature protection	Standard
DC overvoltage protection	Standard
Drive overload protection	Standard
Motor overload protection	Standard
Programmer software	Optional
Local/remote keypad	Standard
Keypad lockout	Standard
Fault alarm output	Standard
Built-in diagnostics	Standard

Description	NEMA Type 1/IP21 or NEMA Type 12/IP54 Specification
Input/Output Interface Features	
Setup adjustment provisions	
Remote keypad/display	Standard
Personal computer	Standard
Operator control provisions	
Drive mounted keypad/display	Standard
Remote keypad/display	Standard
Conventional control elements	Standard
Serial communications	Optional
115 Vac control circuit	Optional
Speed setting inputs	
Keypad	Standard
0–10 Vdc potentiometer/voltage signal	Standard
4–20 mA Isolated	Configurable
4–20 mA Differential	Configurable
3–15 psig	Optional
Analog outputs	
Speed/frequency	Standard
Torque/load/current	Programmable
Motor voltage	Programmable
Kilowatts	Programmable
0–10 Vdc signals	Configurable w/jumpers
4–20 mA DC signals	Standard
Isolated signals	Optional
Discrete outputs	
Fault alarm	Standard
Drive running	Standard
Drive at set speed	Programmable
Optional parameters	14
Dry contacts	1 (2 relays Form C)
Open collector outputs	1
Additional discrete outputs	Optional
Communications	
RS-232	Standard
RS-422/485	Optional
DeviceNet™	Optional
Modbus RTU	Optional
CanOpen (slave)	Optional
Profibus-DP	Optional
Lonworks®	Optional
Johnson Controls Metasys™ N2	Optional

9000X Enclosed Drives, continued

Description	NEMA Type 1/IP21 or NEMA Type 12/IP54 Specification
Performance Features	
Sensorless vector control	Standard
Volts/hertz control	Standard
IR and slip compensation	Standard
Electronic reversing	Standard
Dynamic braking	Optional ①
DC braking	Standard
PID setpoint controller	Programmable
Critical speed lockout	Standard
Current (torque) limit	Standard
Adjustable acceleration/deceleration	Standard
Linear or S curve accel/decel	Standard
Jog at preset speed	Standard
Thread/preset speeds	7
Automatic restart	Selectable
Coasting motor start	Standard
Coast or ramp stop selection	Standard
Elapsed time meter	Optional
Carrier frequency adjustment	1–16 kHz
Standard Conditions for Application and Service	
Operating ambient temperature	0 to 40°C
Storage temperature	–40 to 60°C
Humidity (maximum), non-condensing	95%
Altitude (maximum without derate)	3300 ft (1000m)
Line voltage variation	+10/–15%
Line frequency variation	45–66 Hz
Efficiency	>96%
Power factor (displacement)	>0.94

Standard I/O Specifications


Description	Specification
Six–digital input programmable	24V: “0” ≤10V, “1” ≥18V, R _i >5 kohms
Two–analog input configurable w/jumpers	Voltage: 0–±10V, R _i >200 kohms Current: 0 (4)–20 mA, R _i = 250 ohms
Two–digital output programmable	Form C relays 250 Vac 30 Vdc 2 amp resistive
One–analog output programmable configurable w/jumper	0–20 mA, R _L max. 500 ohms 10 bits ±2%
One digital output programmable	Open collector 48 Vdc 50 mA

I/O Specifications for Control/Communication Options

Description	Specification
Analog voltage, input	0–±10V, R _i ≥200 kohms
Analog current, input	0 (4)–20 mA, R _i = 250 ohms
Digital input	24V: “0” ≤10V, “1” ≥18V, R _i >5 kohms
Auxiliary voltage	24V (±20%), max. 50 mA
Reference voltage	10V ±3%, max. 10 mA
Analog current, output	0 (4)–20 mA, R _L = 500 kohms resolution 10 bit, accuracy ≤±2%
Analog voltage, output	0 (2)–10V, R _L ≥1 kohms, resolution 10 bit, accuracy ≤±2%
Relay output	
Maximum switching voltage	300 Vdc, 250 Vac
Maximum switching load	8A/24 Vdc, 0.4A/300 Vdc, 2 kVA/250 Vac
Maximum continuous load	2A rms
Thermistor input	R _{trip} = 4.7 kohms
Encoder input	24V: “0” ≤10V, “1” ≥18V, R _i = 2.2 kohms 5V: “0” ≤2V, “1” ≥3V, R _i = 330 ohms

Wiring Diagram


Power Diagram for Bypass Options RB and RA

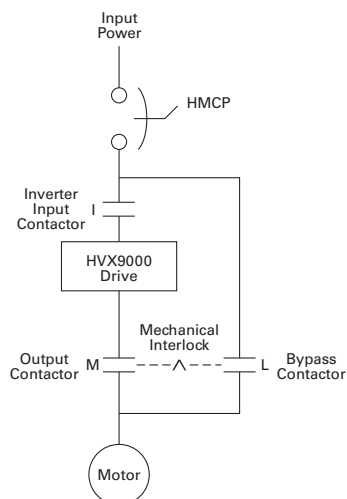**Note**

① Some horsepower units include dynamic braking chopper as standard—refer to individual drive sections.

Dimensions

Approximate Dimensions in Inches (mm)

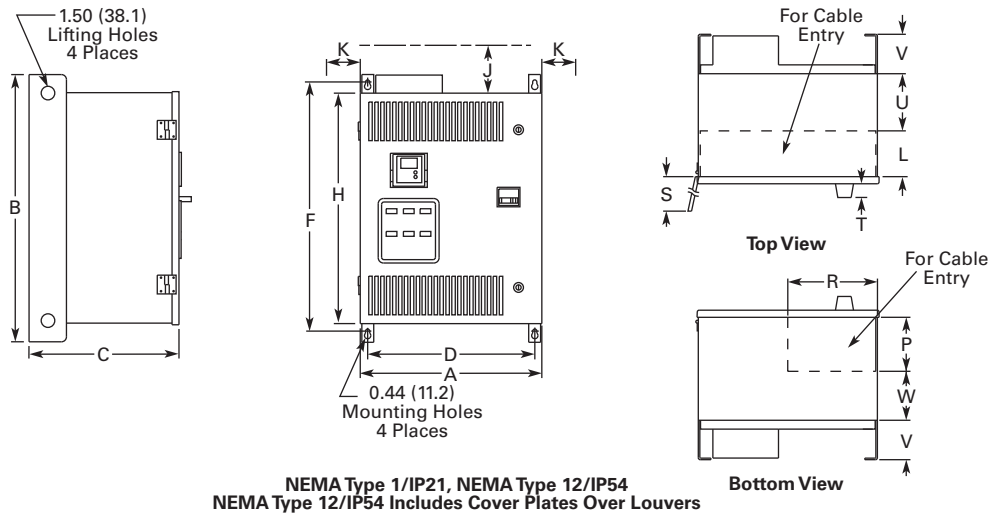9000X Enclosed Drives**Size 0**

For reference only, dimensions are subject to change.

Wide A	High B	Deep C	Mounting D D1		E	E1	F	G	G1	Door Height H	Min. Air Space J K	
19.9 (504)	29.0 (737)	16.4 (416)	18.3 (465)	—	—	—	27.4 (695)	—	—	25.4 (644)	4.0 (102)	3.0 (76)

Cable Entry L	M	N	P	R	Door Clearance S	CB Handle T	U	V	W	Max. Approx. Shipping Weight Lbs (kg)
5.0 (127)	—	—	6.0 (152)	9.6 (245)	26.4 (669)	1.5 (38)	6.3 (160)	4.3 (108)	5.3 (134)	200 (91)

2.3


Adjustable Frequency Drives

SVX9000 Drives


Approximate Dimensions in Inches (mm)

Size 1


2

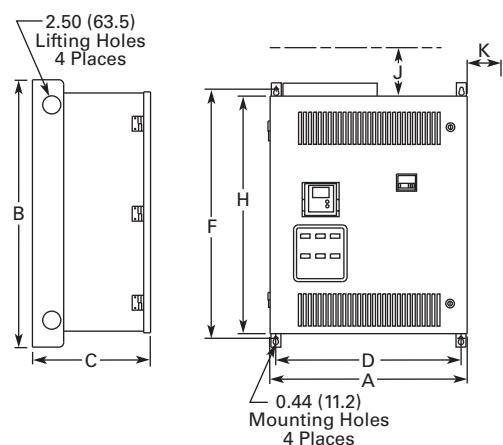


NEMA Type 1/IP21, NEMA Type 12/IP54
NEMA Type 12/IP54 Includes Cover Plates Over Louvers

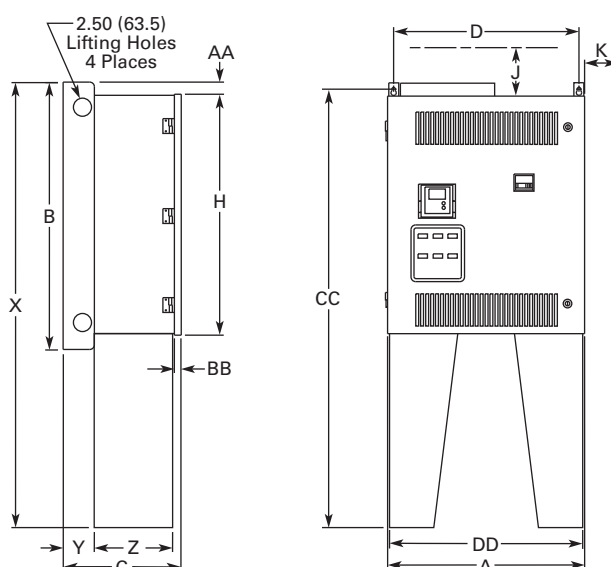


NEMA Type 1/IP21, NEMA Type 12/IP54
with Floor Stand

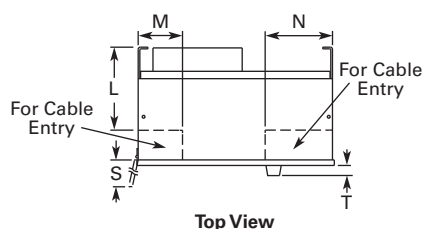

Top View



Bottom View

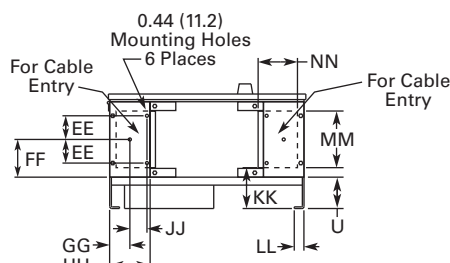


Bottom View
NEMA Type 1/IP21, NEMA Type 12/IP54
with Floor Stand

For reference only, dimensions are subject to change.

Wide A		High B		Deep C		Mounting D		D1		E		E1		F		G		G1		Door Height H			Min. Air Space J		K	
26.4 (669)		36 (914)		16.3 (414)		24.8 (630)		—		—		—		34.0 (864)		—		—		32.4 (822)			4.0 (102)		3.0 (76)	
Cable Entry L		M		N		P		R		Door Clearance S				CB Handle T		U		V		W			Max. Approx. Shipping Weight Lbs (kg)			
11.0 (279)		6.0 (152)		9.0 (229)		10.0 (254)		6.5 (165)		26.4 (669)				1.5 (38)		4.3 (108)		—		—			230 (104)			
Floor Stand																										
X	Y	Z	AA	BB	CC	DD	EE	FF	GG	HH	JJ	KK	LL	MM	NN	PP	RR	SS	TT	UU	VV					
56.0 (1422)	4.3 (108)	11.1 (281)	1.8 (46)	0.8 (19)	55.2 (1402)	26.0 (660)	3.5 (90)	5.5 (141)	3.0 (76)	6.0 (152)	2.0 (51)	5.4 (136)	1.1 (28)	8.8 (224)	5.4 (137)	—	—	—	—	—	—					

Approximate Dimensions in Inches (mm)

Size 2

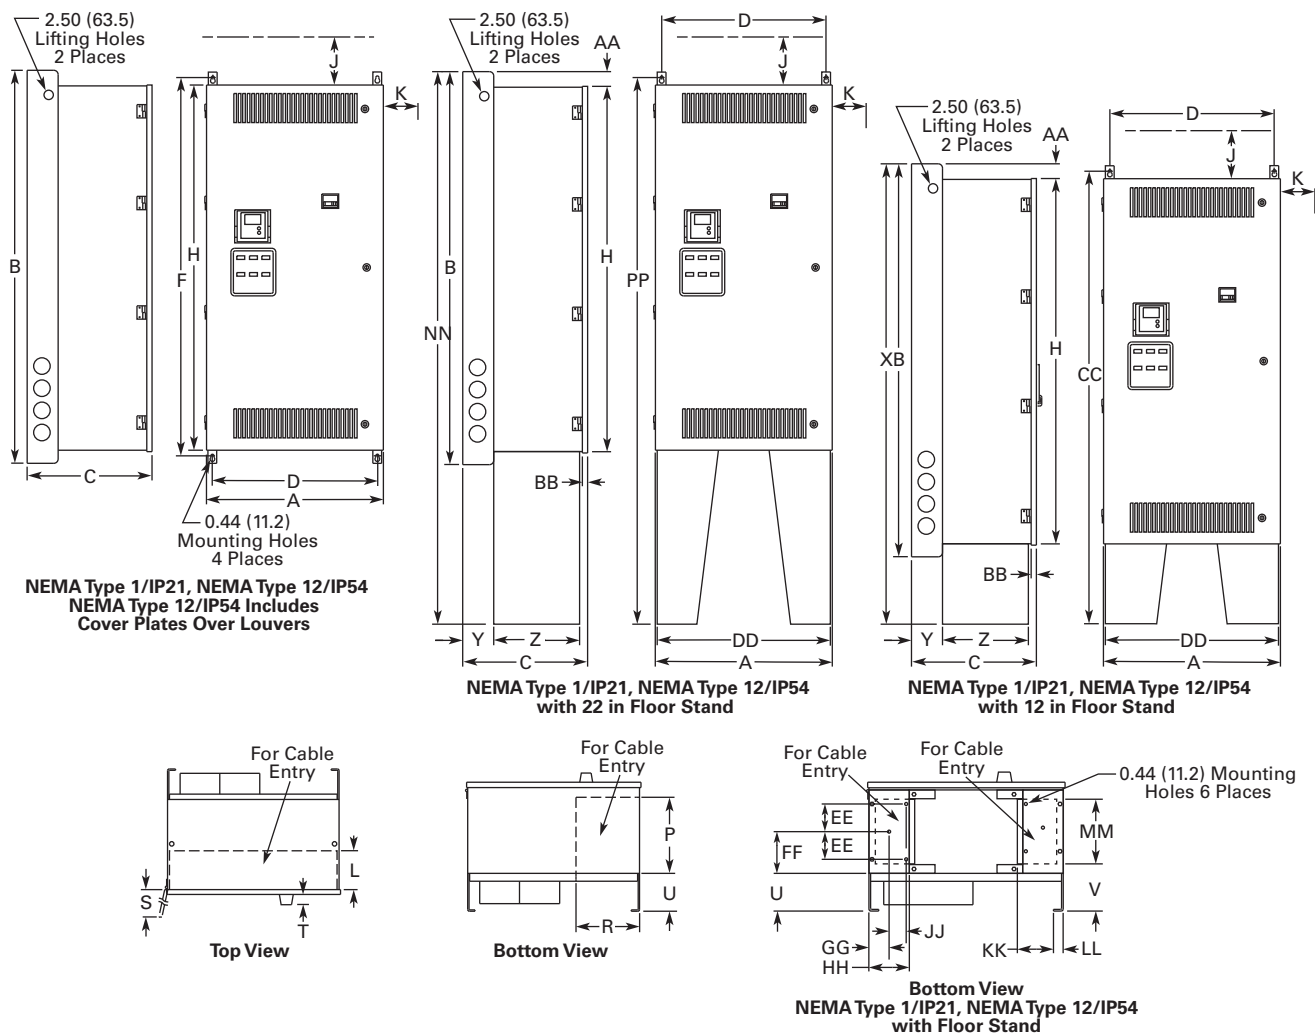

For reference only, dimensions are subject to change.

Wide A		High B		Deep C		Mounting D		D1		E		E1		F		G		G1		Door Height H		Min. Air Space J		K	
26.4 (669)		59.0 (1499)		19.4 (492)		24.8 (630)		—		—		—		57.0 (1448)		—		—		55.4 (1406)		4.0 (102)		3.0 (76)	
Cable Entry L		M		N		P		R		Door Clearance S		CB Handle T		U		V		W		Max. Approx. Shipping Weight Lbs (kg)					
5.9 (149)		—		—		12.4 (315)		9.5 (241)		26.4 (669)		1.5 (38)		4.8 (121)		5.9 (151)		—		380 (173)					
Floor Stand																									
X	Y	Z	AA	BB	CC	DD	EE	FF	GG	HH	JJ	KK	LL	MM	NN	PP	RR	SS	TT	UU	VV				
69.0 (1753)	4.8 (121)	13.6 (344)	1.8 (46)	0.8 (19)	68.2 (1732)	26.0 (660)	4.8 (121)	6.8 (172)	3.0 (76)	6.0 (152)	2.0 (51)	5.0 (127)	1.1 (28)	11.3 (288)	79.0 (2007)	78.2 (1986)	—	—	—	—	—	—	—	—	—

2.3


Adjustable Frequency Drives

SVX9000 Drives

Approximate Dimensions in Inches (mm)

Size 3

2

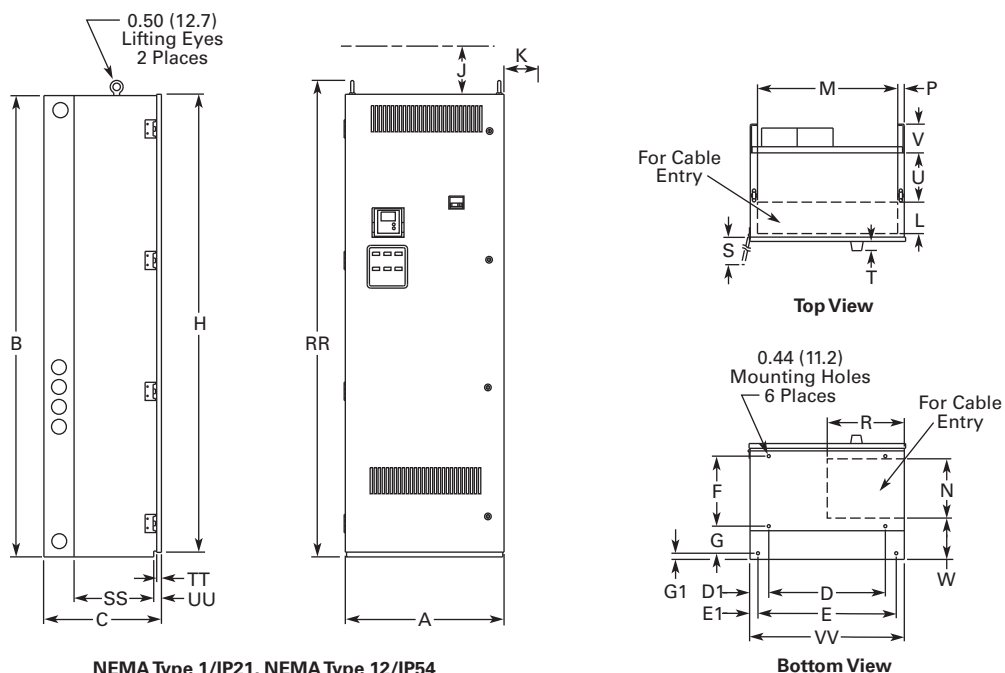

NEMA Type 1/IP21, NEMA Type 12/IP54
NEMA Type 12/IP54 Includes Cover Plates Over Louvers


For reference only, dimensions are subject to change.

Wide A	High B	Deep C	Mounting D	D1	E	E1	F	G	G1	Door Height H	Min. Air Space J	K
26.4 (671)	77.0 (1956)	19.4 (493)	19.5 (495)	3.3 (83)	23.0 (584)	1.5 (38)	11.7 (298)	5.5 (140)	0.9 (24)	76.4 (1939)	4.0 (102)	3.0 (76)

Cable Entry L	M	N	P	R	Door Clearance S	CB Handle T	U	V	W	RR	SS	TT	UU	VV	Max. Approx. Shipping Weight Lbs (kg)
5.3 (133)	23.4 (594)	10.0 (254)	1.3 (32)	12.9 (328)	26.4 (669)	1.5 (38)	8.0 (203)	4.8 (121)	6.8 (173)	79.5 (2018)	13.40 (340)	0.8 (19)	1.3 (32)	26.0 (660)	690 (313)

Approximate Dimensions in Inches (mm)

Size 4

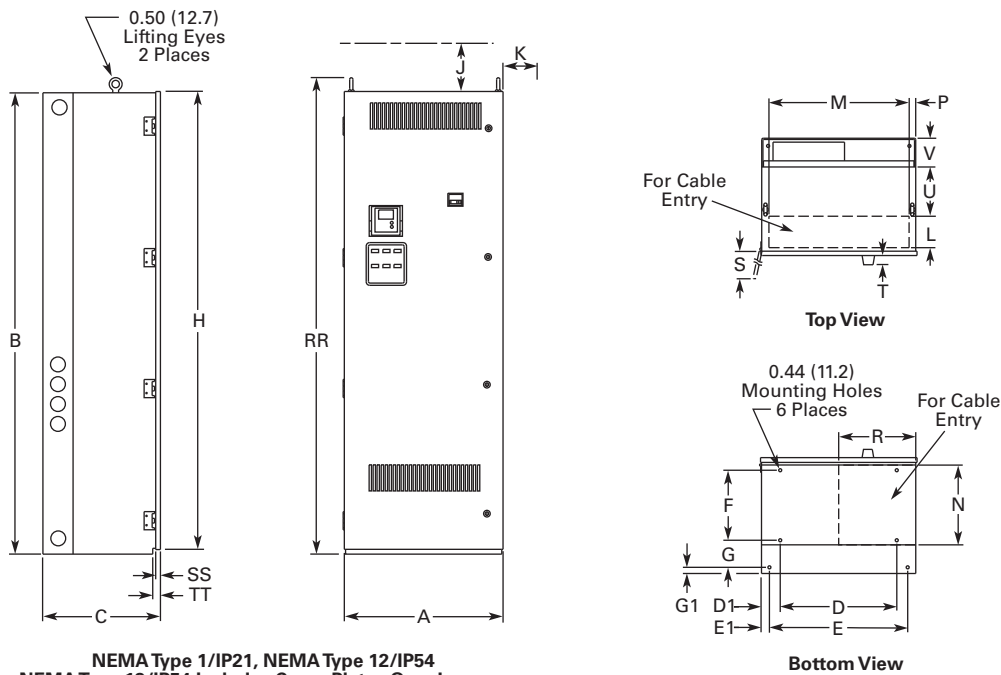

NEMA Type 1/IP21, NEMA Type 12/IP54
NEMA Type 12/IP54 Includes Cover Plates Over Louvers

For reference only, dimensions are subject to change.

Wide A	High B	Deep C	Mounting D D1		E	E1	F	G	G1	Door Height H	Min. Air Space J K	
26.4 (671)	90.0 (2286)	19.4 (493)	19.5 (495)	3.3 (83)	23.0 (584)	1.5 (38)	11.7 (298)	5.5 (140)	0.9 (24)	89.4 (2270)	4.0 (102)	3.0 (76)

Cable Entry L M N			P	R	Door Clearance S	CB Handle T U V			W	RR	SS	TT	UU	VV	Max. Approx. Shipping Weight Lbs (kg)
5.3 (133)	23.4 (594)	13.8 (351)	1.0 (25)	11.2 (286)	26.4 (669)	1.5 (38)	8.0 (204)	4.8 (121)	—	92.5 (2349)	0.8 (19)	1.3 (32)	—	—	825 (375)

2.3


Adjustable Frequency Drives

SVX9000 Drives

Approximate Dimensions in Inches (mm)

Size 5

2

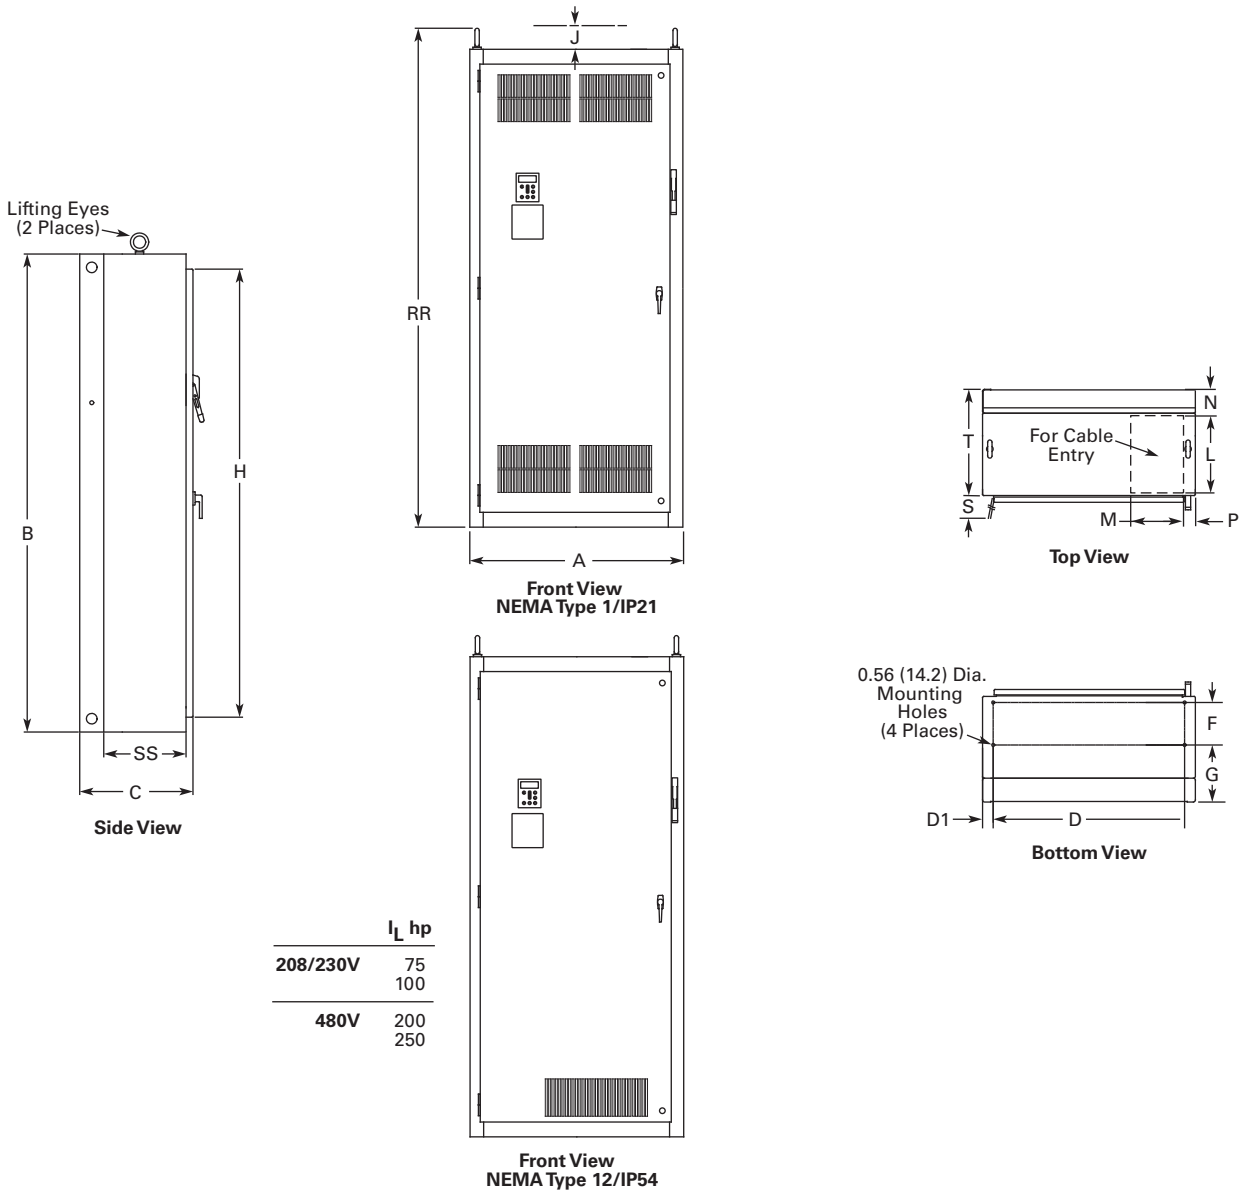


For reference only, dimensions are subject to change.

Wide A	High B	Deep C	Mounting D D1		E	E1	F	G	G1	Door Height H	Min. Air Space J K	
40.0 (1016)	90.0 (2286)	21.3 (541)	36.0 (914)	2.0 (51)	—	—	8.0 (203)	10.8 (273)	—	84.4 (2143)	4.0 (102)	—

Cable Entry L M N			Door Clearance P R S			T	U	V	W	RR	SS	TT	UU	VV	Max. Approx. Shipping Weight Lbs (kg)
15.0 (381)	10.0 (254)	4.8 (122)	2.0 (51)	—	36.3 (921)	20.0 (508)	—	—	—	94.0 (2387)	15.5 (394)	—	—	—	1275 (579)

Approximate Dimensions in Inches (mm)

Size 5-1P

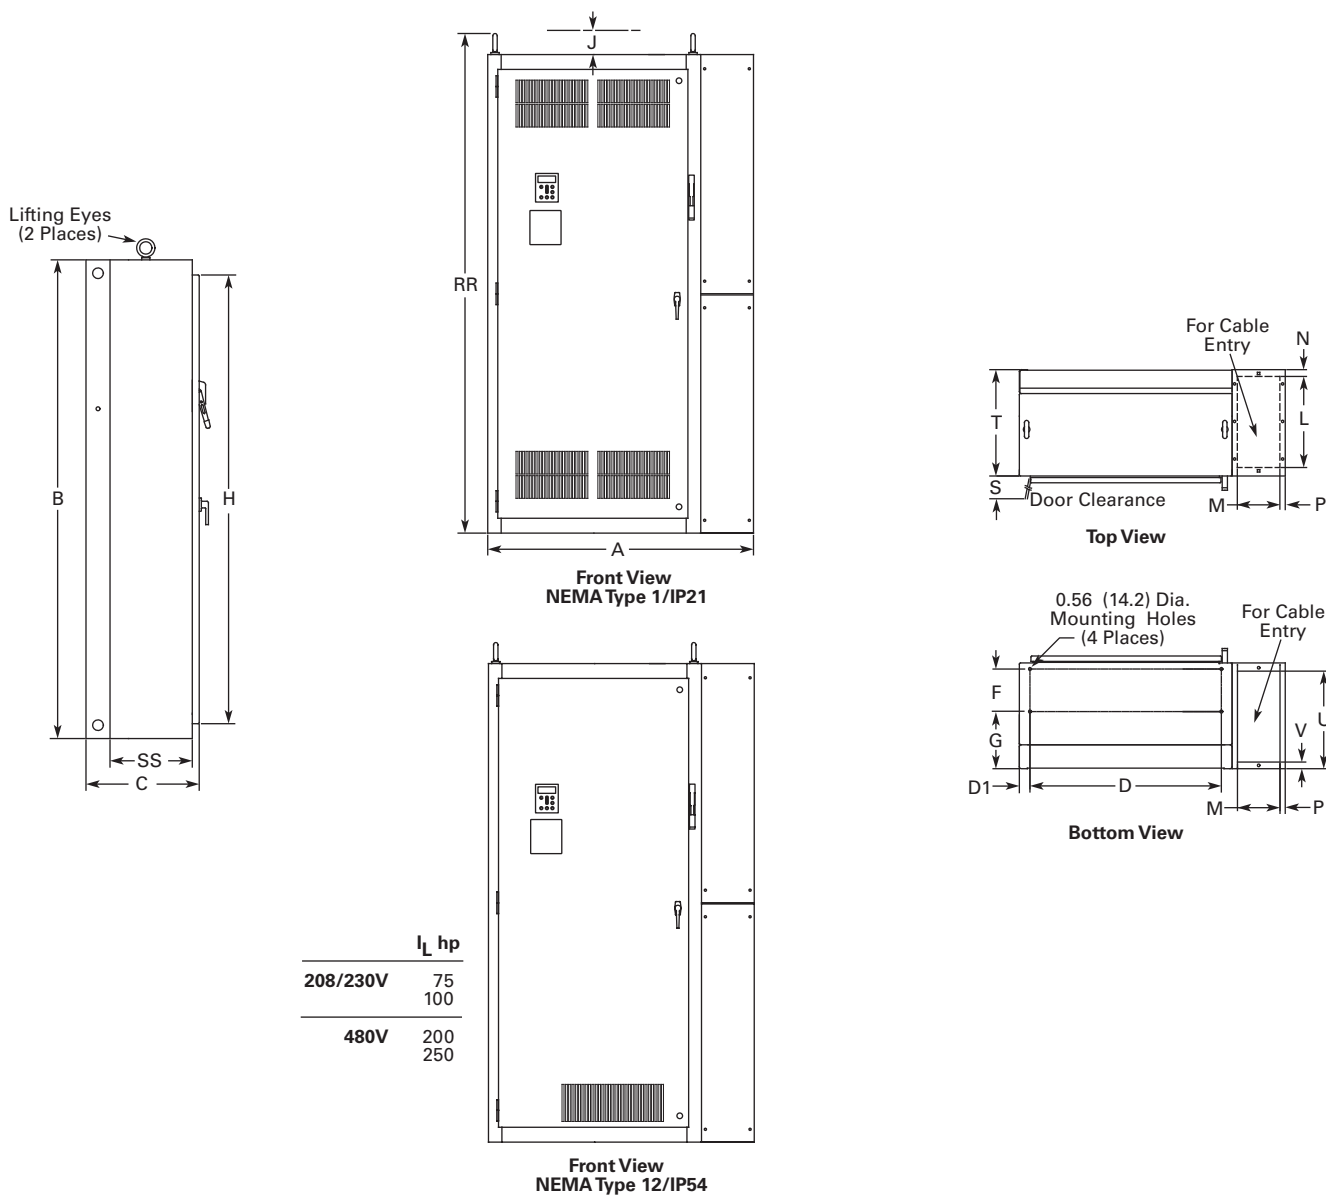

For reference only, dimensions are subject to change.

Wide A	High B	Deep C	Mounting D D1		E	E1	F	G	G1	Door Height H	Min. Air Space J K	
50.0 (1270)	90.0 (2286)	21.3 (541)	36.0 (914)	2.0 (51)	—	—	8.0 (203)	10.8 (273)	—	84.4 (2143)	4.0 (102)	—

Cable Entry L M N			Door Clearance P R S			T	U	V	W	RR	SS	TT	UU	VV	Max. Approx. Shipping Weight Lbs (kg)
17.1 (435)	8.0 (203)	1.3 (33)	1.0 (25)	—	36.3 (921)	20.0 (508)	18.4 (466)	1.3 (32)	—	94.0 (2387)	15.5 (394)	—	—	—	1375 (624)

2.3


Adjustable Frequency Drives

SVX9000 Drives


Approximate Dimensions in Inches (mm)

Size 5-2P


2

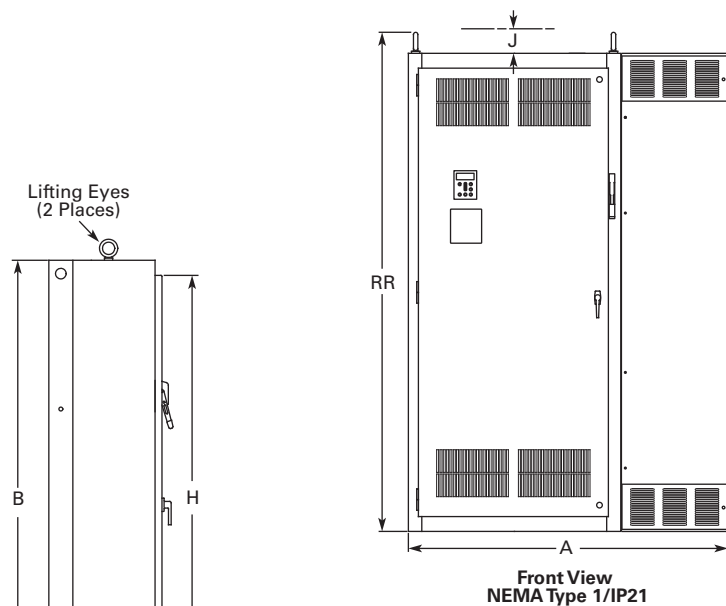

Front View
NEMA Type 1/IP21

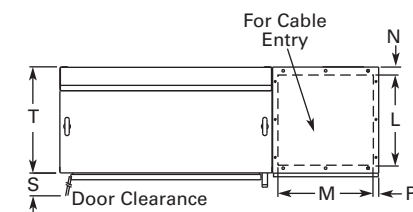


Top View

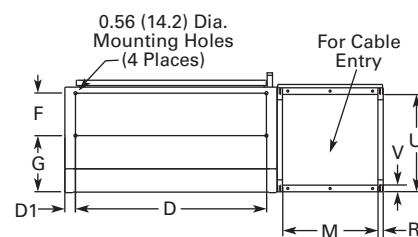

Bottom View

	I_L hp
208/230V	75 100
480V	200 250

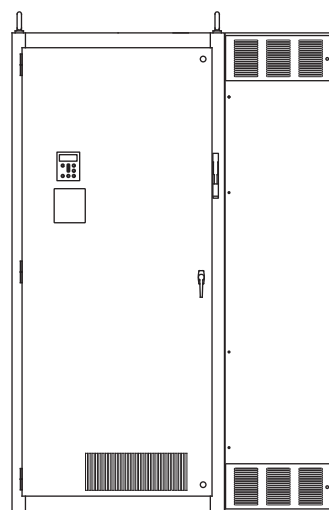


Front View
NEMA Type 12/IP54

For reference only, dimensions are subject to change.

Wide A	High B	Deep C	Mounting							Door Height H	Min. Air Space J				
			D	D1	E	E1	F	G	G1		K				
Enclosure Size 5-2P															
60.0 (1524)	90.0 (2286)	21.3 (541)	36.0 (914)	2.0 (51)	—	—	8.0 (203)	10.8 (273)	—	84.4 (2143)	4.0 (102)	—			
												Max. Approx. Shipping Weight Lbs (kg)			
Cable Entry					Door Clearance										
L	M	N	P	R	S	T	U	V	W	RR	SS		TT	UU	VV
17.0 (432)	18.0 (457)	1.5 (38)	1.0 (25)	0.9 (23)	36.3 (921)	20.0 (508)	18.4 (466)	1.3 (32)	—	94.0 (2387)	15.5 (394)	—	—	—	1585 (720)

Approximate Dimensions in Inches (mm)

Size 6

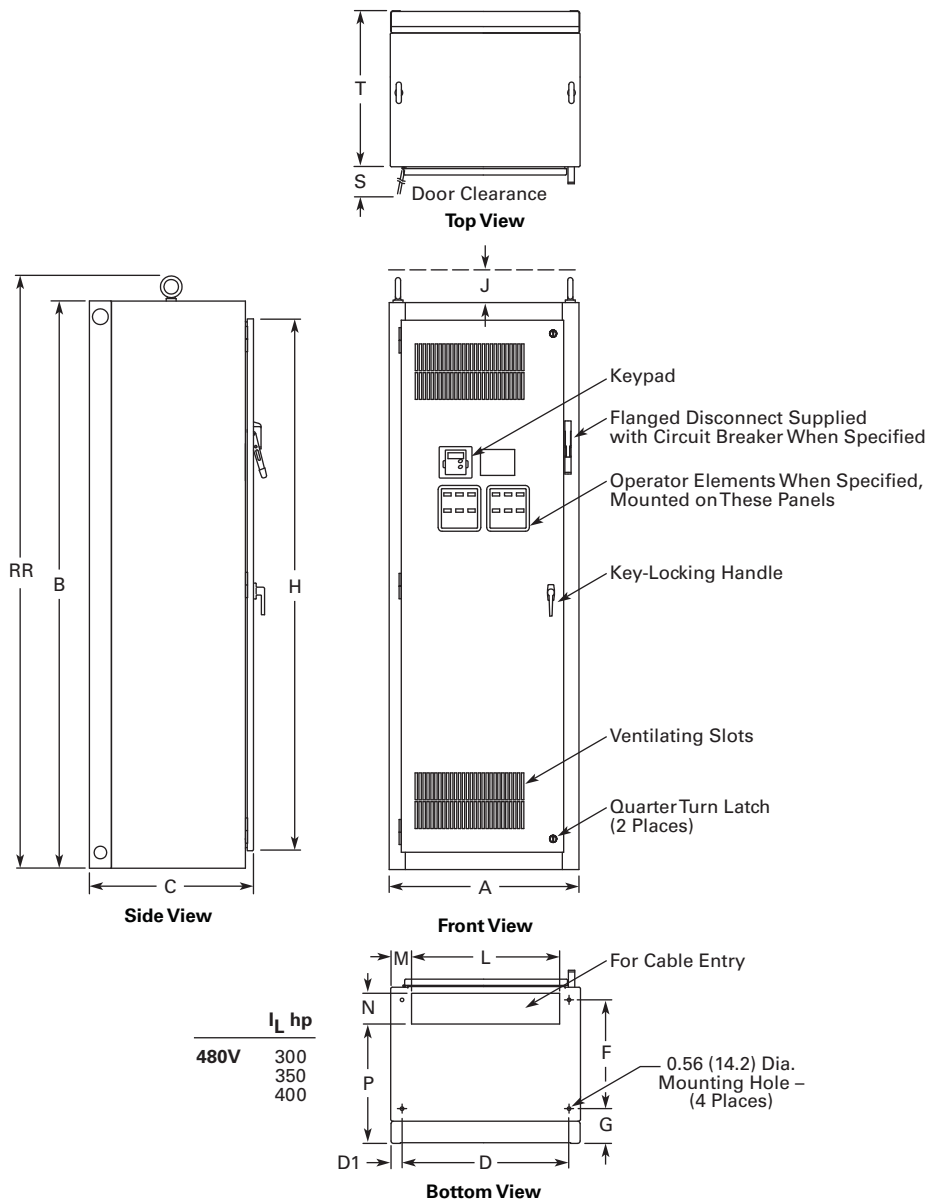

For reference only, dimensions are subject to change. See **Page V6-T2-57**, notes 3 and 5 for enclosure and option selection.

Wide A	High B	Deep C	Mounting										Door Height H	Min. Air Space	
D	D1	E	E1	F	G	G1								J	K
30.0 (762)	90.0 (2286)	26.0 (660)	26.5 (673)	1.8 (46)	—	—	—	17.3 (438)	5.5 (140)	—	—	—	84.4 (2143)	4.0 (102)	—

Cable Entry			Door Clearance													Max. Approx. Shipping Weight Lbs (kg)
L	M	N	P	R	S	T	U	V	W	RR	SS	TT	UU	VV		
23.5 (597)	3.3 (84)	4.5 (114)	19.3 (490)	—	26.2 (667)	24.8 (629)	—	—	—	93.9 (2386)	—	—	—	—	—	1500 (681)

2.3


Adjustable Frequency Drives

SVX9000 Drives

Approximate Dimensions in Inches (mm)

Size 8

2

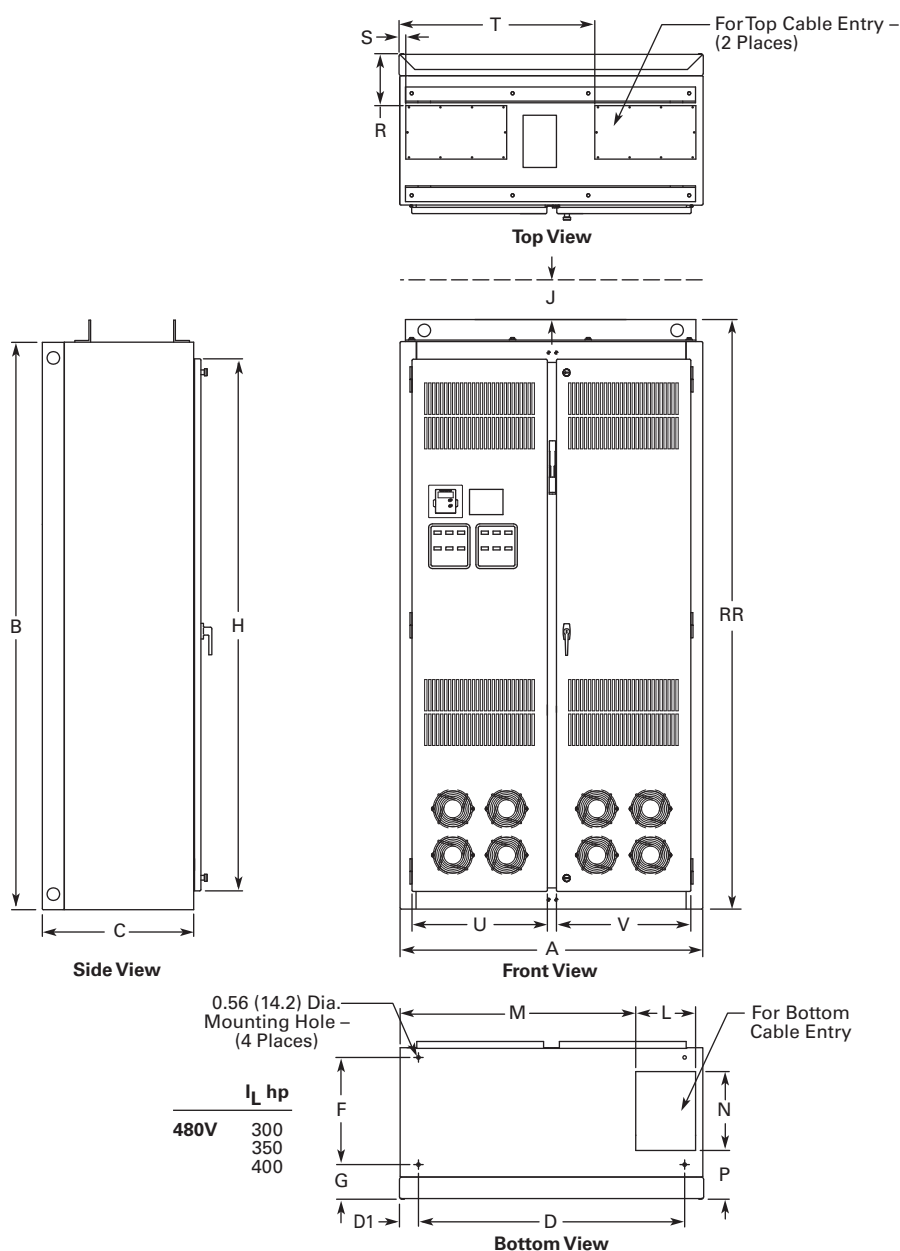


For reference only, dimensions are subject to change. See **Page V6-T2-57**, notes 3 and 5 for enclosure and option selection.

Wide A	High B	Deep C	Mounting		E	E1	F	G	G1	Door Height H	Min. Air Space J	K
48.0 (1219)	90.0 (2286)	24.0 (610)	42.2 (1072)	3.0 (77)	—	—	—	5.5 (139)	—	84.4 (2143)	4.0 (102)	—

Cable Entry		N	P	R	S	T	U	V	W	RR	SS	TT	UU	VV	Max. Approx. Shipping Weight Lbs (kg)
L	M	12.5 (318)	7.7 (196)	8.3 (210)	1.3 (32)	31.0 (787)	21.5 (545)	21.3 (541)	—	93.5 (2375)	—	—	—	—	2000 (908)
9.5 (241)	37.5 (952)														

Approximate Dimensions in Inches (mm)

Size 9

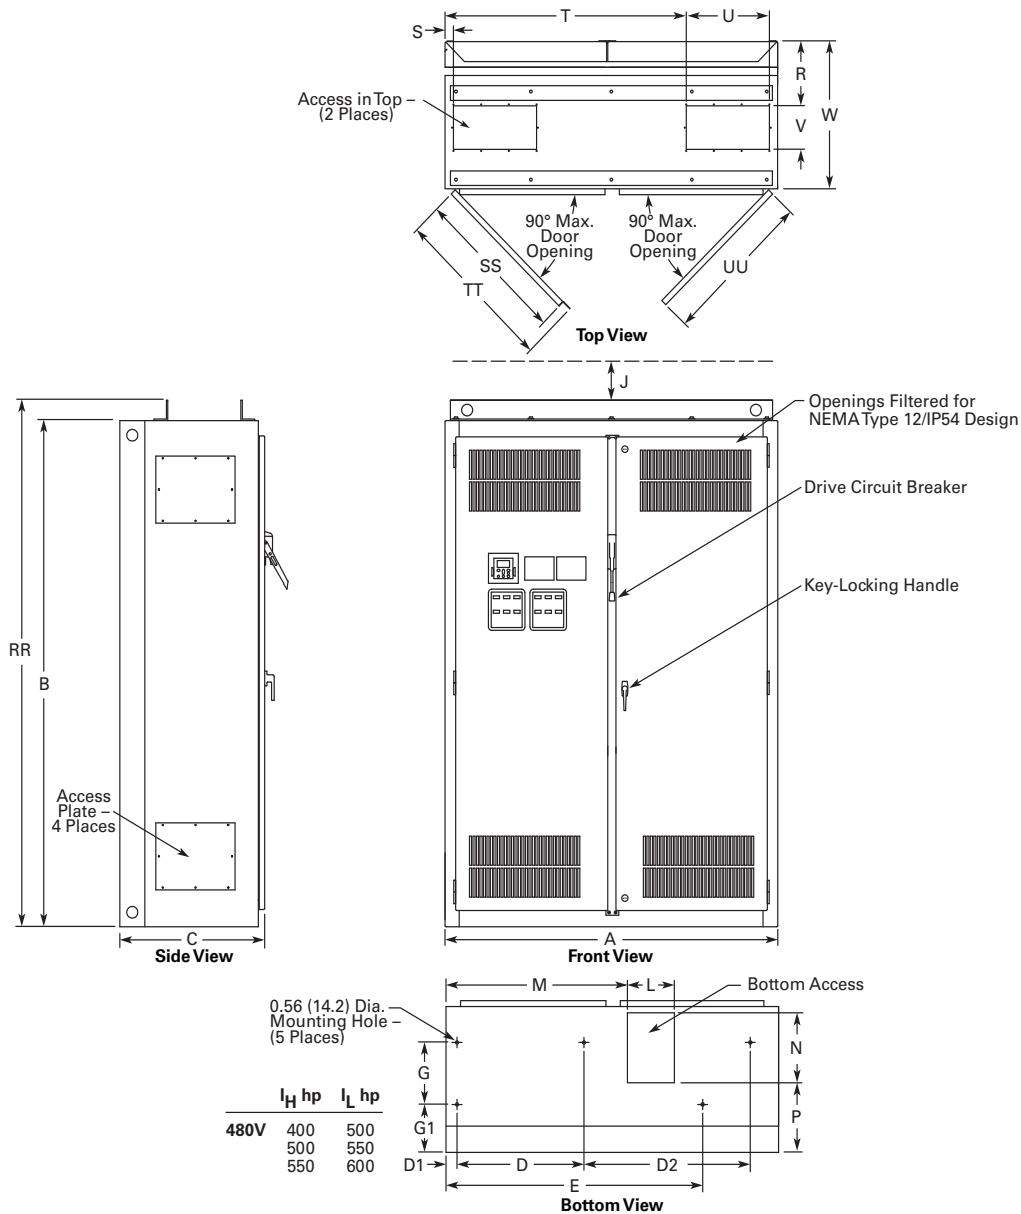

For reference only, dimensions are subject to change. See **Page V6-T2-57**, notes 3 and 5 for enclosure and option selection.

Wide A	High B	Deep C	Mounting D	D1	E	E1	F	G	G1	Door Height H	Min. Air Space J	K
60.0 (1524)	90.0 (2286)	260.1 (664)	22.9 (582)	2.0 (51)	30.0 (762)	44.3 (1125)	10.6 (270)	10.6 (270)	8.2 (208)	—	4.0 (102)	—

Cable Entry															Max. Approx. Shipping Weight Lbs (kg)
L	M	N	P	R	S	T	U	V	W	RR	SS	TT	UU	VV	
8.5 (216)	32.7 (831)	12.0 (305)	11.9 (303)	9.8 (249)	1.5 (38)	43.5 (1105)	15.0 (381)	7.5 (191)	25.0 (635)	93.5 (2375)	27.4 (696)	290.1 (738)	270.1 (687)	—	2500 (1135)

SVX9000 VFD Pump Panels

2



Contents

Description

Description	Page
SVX9000 Open Drives	V6-T2-17
SVX9000 Enclosed Drives	V6-T2-52
SVX9000 VFD Pump Panels	
Catalog Number Selection	V6-T2-79
Product Selection	V6-T2-80
Options	V6-T2-85
Technical Data and Specifications	V6-T2-89
Wiring Diagrams	V6-T2-91
Dimensions	V6-T2-92

SVX9000 VFD Pump Panels

Product Description

- **Standard Enclosed**—covers a wide range of the most commonly ordered options. Pre-engineering eliminates the lead time normally associated with customer specific options.
- **Modified Standard Enclosed**—applies to specific customer requirements that vary from the Standard Enclosed offering, such as the need for an additional indicating light or minor modifications to drawings. *Consult your Eaton representative for assistance in pricing and lead time.*
- **Custom Engineered**—for those applications with more unique or complex requirements, these are individually engineered to the customer's needs. *Consult your Eaton representative for assistance in pricing and lead time.*

Features

- NEMA Type 12/IP54 or NEMA Type 3R enclosures
- Input voltage: 208V, 230V, 480V and 575V (consult factory)
- Complete range of control, network and power options
- Horsepower range:
 - 208V—3/4 to 100 hp I_H; 1 to 100 hp I_L
 - 230V—3/4 to 100 hp I_H; 1 to 100 hp I_L
 - 480V—1 to 350 hp I_H; 1-1/2 to 400 hp I_L
- HMCP padlockable
- Single-phase input available—consult factory


Standards and Certifications

- UL Listed
- cUL Listed



Product Identification

SVX9000 Pump Application

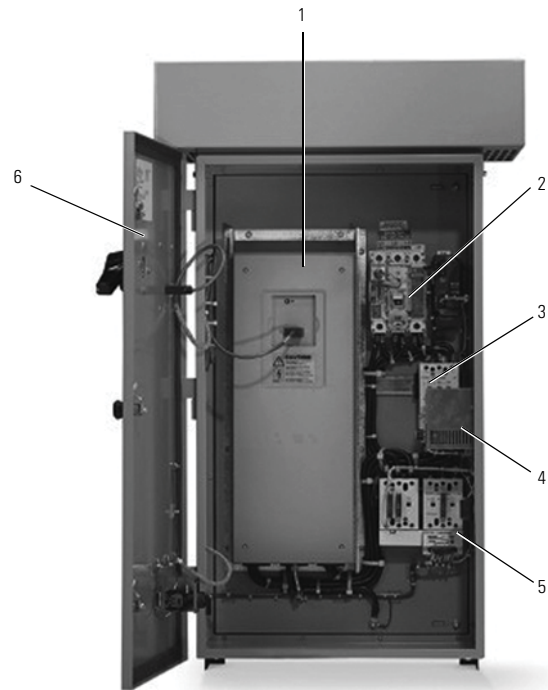

- | | |
|--|---|
| 1 SVX9000 variable frequency drive | 4 Space heater
Option S9 |
| 2 Input disconnect (HMCP)
Option P1 | 5 Bypass contactor
Option RA/RB |
| 3 Input contactor (included as
standard with bypass option) | 6 Door-mounted keypad
(included as standard) |

Catalog Number Selection

SVX9000 Enclosed NEMA Type 12/IP54/3R Drive

SVX 010 2 4 E P

Build Alphabetically and Numerically

Product Family	
SVX = Enclosed drives	

Horsepower Rating		
F07 = 3/4 hp	010 = 10 hp	060 = 60 hp
001 = 1 hp	015 = 15 hp	075 = 75 hp
F15 = 1-1/2 hp	020 = 20 hp	100 = 100 hp
002 = 2 hp	025 = 25 hp	125 = 125 hp
003 = 3 hp	030 = 30 hp	150 = 150 hp
005 = 5 hp	040 = 40 hp	200 = 200 hp
007 = 7-1/2 hp	050 = 50 hp	
Consult factory ①		
250 = 250 hp	350 = 350 hp	
300 = 300 hp	400 = 400 hp	

Enclosure Rating	
2 = NEMA Type 12/IP54	
3 = NEMA Type 3R	

Voltage Rating	
Three-phase	Single-phase
1 = 208V	J = 230V
2 = 230V	K = 480V
4 = 480V	

Application—Torque/Braking ③	
A = I _L /no brake chopper	
B = I _L /internal brake chopper	
D = I _H /no brake chopper	
E = I _H /internal brake chopper	

Enclosed Style	
P = Pumping application	

Enclosed Options ②⑤⑥		Type
K1	Door-mounted speed potentiometer ④	Control
K2	Door-mounted speed potentiometer with HOA selector switch ④	Control
K5	MANUAL/AUTO reference switch (22 mm)	Control
K6	START and STOP pushbuttons (22 mm)	Control
K9	(2) Factory installed auxiliary contacts	Power
L1	Power on and fault pilot lights	Light
L2	Bypass pilot lights for RA bypass option ⑥	Addl. bypass
LD	Green STOP light	Light
LE	Red RUN light	Light
LU	Light (22 mm)	Light
LW	PTT light (22 mm)	Light
LY	Adder for LED each	Light
P1	Input disconnect (HMCP) 100 kAIC	Input
P3	Input line fuses (200 kAIC)	Input
P7	Input power surge protection	Input
P8	TVSS transient voltage surge suppressor	Input
PE	Output contactor	Output
RA	Manual HOA bypass controller ⑥	Bypass
S5	Floor stand 22 in	Enclosure
S9	Space heater w/out CPT	Enclosure
SA	Space heater w/CPT	Enclosure
SB	Socket type control relay	Enclosure
SE	On-delay timer	Enclosure
SF	Off-delay timer	Enclosure

Communication Options ⑦	
C2 = Modbus	
C3 = Profibus DP	
C4 = LonWorks	
C5 = Profibus DP (D9 connector)	
C6 = CanOpen (slave)	
C7 = DeviceNet	
C8 = Modbus (D9 type connector)	
CA = Johnson Controls N2	
CI = Modbus TCP	
CJ = BACnet	
CK = Ethernet IP	
D3 = RS-232 with D9 connection	

Control Options	
B1 = 6 DI, 1 ext +24 Vdc/EXT +24 Vdc	
B2 = 1 RO (NC-NO), 1 RO (NO), 1 therm	
B4 = 1 AI (mA isolated), 2 AO (mA isolated), 1 ext +24 Vdc/EXT +24 Vdc	
B5 = 3 RO (NO)	
B8 = 1 ext +24 Vdc/EXT +24 Vdc, 3 Pt100	
B9 = 1 RO (NO), 5 DI 42–240 Vac input	

Notes

- ① Consult factory.
- ② Local/remote keypad is included as the standard control panel.
- ③ Brake chopper is a factory installed option only, see drive options on **Page V6-T2-18**. External dynamic braking resistors not included. Consult factory.
- ④ Includes local/remote speed reference switch.
- ⑤ Some options are voltage and/or horsepower specific. Consult your Eaton representative for details.
- ⑥ See **Page V6-T2-87** for descriptions.
- ⑦ See **Pages V6-T2-85** and **V6-T2-86** for complete descriptions.
- ⑧ Bypass options applicable only in the pump panel three-phase design.

Product Selection

2

When Ordering

- Select a base catalog number that meets the application requirements—nominal horsepower, voltage and enclosure rating (the enclosed drive's continuous output amp rating should be equal to or greater than the motor's full load amp rating). The base enclosed package includes a standard drive, door mounted local/remote keypad and enclosure.
- If dynamic brake chopper or control/communication option is desired, change the appropriate code in the base catalog number.
- Select enclosed options. Add the codes as suffixes to the base catalog number in alphabetical and numeric order.
- **Read all footnotes.**

208V Drives

SVX9000 Enclosed Drives



Pump Panel Style (Three-Phase)

NEMA Type 12/IP54				NEMA Type 3R	
Enclosure Size ①	hp	Frame Size	Base Catalog Number ②	Frame Size	Base Catalog Number ②
High Overload Drive and Enclosure					
A	3/4	4	SVXF0721EP	4	SVXF0731EP
	1		SVX00121EP		SVX00131EP
	1-1/2		SVXF1521EP		SVXF1531EP
	2		SVX00221EP		SVX00231EP
	3	5	SVX00321EP	5	SVX00331EP
	5		SVX00521EP		SVX00531EP
	7-1/2		SVX00721EP		SVX00731EP
	10	6	SVX01021EP	6	SVX01031EP
B	15		SVX01521EP		SVX01531EP
	20	7	SVX02021DP	7	SVX02031DP
	25		SVX02521DP		SVX02531DP
C	30	8	SVX03021DP	8	SVX03031DP
	40		SVX04021DP		SVX04031DP
	50		SVX05021DP		SVX05031DP
D	60	9	SVX06021DP	9	SVX06031DP
	75		SVX07521DP		SVX07531DP
	100		SVX10021DP		SVX10031DP
Low Overload Drive and Enclosure					
A	1	4	SVX00121BP	4	SVX00131BP
	1-1/2		SVXF1521BP		SVXF1531BP
	2		SVX00221BP		SVX00231BP
	3		SVX00321BP		SVX00331BP
	5	5	SVX00521BP	5	SVX00531BP
	7-1/2		SVX00721BP		SVX00731BP
	10		SVX01021BP		SVX01031BP
	15	6	SVX01521BP	6	SVX01531BP
B	20		SVX02021BP		SVX02031BP
	25	7	SVX02521AP	7	SVX02531AP
	30		SVX03021AP		SVX03031AP
C	40	8	SVX04021AP	8	SVX04031AP
	50		SVX05021AP		SVX05031AP
	60		SVX06021AP		SVX06031AP
D	75	9	SVX07521AP	9	SVX07531AP
	100		SVX10021AP		SVX10031AP

Notes

① Enclosure dimensions starting on **Page V6-T2-92**.

② Includes drive, local/remote keypad and enclosure.

230V Drives

SVX9000 Enclosed Drives



Pump Panel Style (Three-Phase)

NEMA Type 12/IP54				NEMA Type 3R	
Enclosure Size ①	hp	Frame Size	Base Catalog Number ②	Frame Size	Base Catalog Number ②
High Overload Drive and Enclosure					
A	3/4	4	SVXF0722EP	4	SVXF0732EP
	1		SVX00122EP		SVX00132EP
	1-1/2		SVXF1522EP		SVXF1532EP
	2		SVX00222EP		SVX00232EP
	3	5	SVX00322EP	5	SVX00332EP
	5		SVX00522EP		SVX00532EP
	7-1/2		SVX00722EP		SVX00732EP
B	10	6	SVX01022EP	6	SVX01032EP
	15		SVX01522EP		SVX01532EP
	20	7	SVX02022DP	7	SVX02032DP
C	25		SVX02522DP		SVX02532DP
	30		SVX03022DP		SVX03032DP
	40	8	SVX04022DP	8	SVX04032DP
D	50		SVX05022DP		SVX05032DP
	60		SVX06022DP		SVX06032DP
	75	9	SVX07522DP	9	SVX07532DP
	100		SVX10022DP		SVX10032DP
Low Overload Drive and Enclosure					
A	1	4	SVX00122BP	4	SVX00132BP
	1-1/2		SVXF1522BP		SVXF1532BP
	2		SVX00222BP		SVX00232BP
	3		SVX00322BP		SVX00332BP
	5	5	SVX00522BP	5	SVX00532BP
	7-1/2		SVX00722BP		SVX00732BP
	10		SVX01022BP		SVX01032BP
B	15	6	SVX01522BP	6	SVX01532BP
	20		SVX02022BP		SVX02032BP
	25	7	SVX02522AP	7	SVX02532AP
C	30		SVX03022AP		SVX03032AP
	40		SVX04022AP		SVX04032AP
	50	8	SVX05022AP	8	SVX05032AP
D	60		SVX06022AP		SVX06032AP
	75		SVX07522AP		SVX07532AP
	100	9	SVX10022AP	9	SVX10032AP

Notes

- ① Enclosure dimensions starting on **Page V6-T2-92**.
 ② Includes drive, local/remote keypad and enclosure.

SVX9000 Enclosed Drives

2



Pump Panel Style (Single-Phase)

NEMA Type 12/IP54				NEMA Type 3R	
Enclosure Size ①	hp	Frame Size	Base Catalog Number ②	Frame Size	Base Catalog Number ②
Low Overload Drive and Enclosure					
A	3/4	4	SVXF072JBP	4	SVXF073JBP
	1		SVX0012JBP		SVX0013JBP
	2	5	SVX0022JBP	5	SVX0023JBP
	3		SVX0032JBP		SVX0033JBP
	5		SVX0052JBP		SVX0053JBP
	7-1/2	6	SVX0072JBP	6	SVX0073JBP
	10		SVX0102JBP		SVX0103JBP
B	15	7	SVX0152JBP	7	SVX0153JBP
	20		SVX0202JAP		SVX0203JAP
C	25	8	SVX0252JAP	8	SVX0253JAP
	30		SVX0302JAP		SVX0303JAP
	40		SVX0402JAP		SVX0403JAP

Notes

① Enclosure dimensions starting on **Page V6-T2-92**.

② Includes drive, local/remote keypad and enclosure.

480V Drives

SVX9000 Enclosed Drives



Pump Panel Style (Three-Phase)

NEMA Type 12/IP54				NEMA Type 3R	
Enclosure Size ①	hp	Frame Size	Base Catalog Number ②	Frame Size	Base Catalog Number ②
High Overload Drive and Enclosure					
A	1	4	SVX00124EP	4	SVX00134EP
	1-1/2		SVXF1524EP		SVXF1534EP
	2		SVX00224EP		SVX00234EP
	3		SVX00324EP		SVX00334EP
	5		SVX00524EP		SVX00534EP
	7-1/2	5	SVX00724EP	5	SVX00734EP
	10		SVX01024EP		SVX01034EP
	15		SVX01524EP		SVX01534EP
	20	6	SVX02024EP	6	SVX02034EP
	25		SVX02524EP		SVX02534EP
B	30	7	SVX03024EP	7	SVX03034EP
	40		SVX04024DP		SVX04034DP
	50		SVX05024DP		SVX05034DP
	60		SVX06024DP		SVX06034DP
C	75	8	SVX07524DP	8	SVX07534DP
	100		SVX10024DP		SVX10034DP
	125		SVX12524DP		SVX12534DP
D	150	9	SVX15024DP	9	SVX15034DP
	200		SVX20024DP		SVX20034DP
Consult factory	250	10	SVX25024DP	10	SVX25034DP
	300		SVX30024DP		SVX30034DP
	350		SVX35024DP		SVX35034DP
Low Overload Drive and Enclosure					
A	1-1/2	4	SVXF1524BP	4	SVXF1534BP
	2		SVX00224BP		SVX00234BP
	3		SVX00324BP		SVX00334BP
	5		SVX00524BP		SVX00534BP
	7-1/2		SVX00724BP		SVX00734BP
	10	5	SVX01024BP	5	SVX01034BP
	15		SVX01524BP		SVX01534BP
	20		SVX02024BP		SVX02034BP
	25	6	SVX02524BP	6	SVX02534BP
	30		SVX03024BP		SVX03034BP
B	40	7	SVX04024BP	7	SVX04034BP
	50		SVX05024AP		SVX05034AP
	60		SVX06024AP		SVX06034AP
	75		SVX07524AP		SVX07534AP
C	100	8	SVX10024AP	8	SVX10034AP
	125		SVX12524AP		SVX12534AP
	150		SVX15024AP		SVX15034AP
D	200	9	SVX20024AP	9	SVX20034AP
	250		SVX25024AP		SVX25034AP
Consult factory	300	10	SVX30024AP	10	SVX30034AP
	400		SVX40024AP		SVX40034AP

Notes① Enclosure dimensions starting on **Page V6-T2-92**.

② Includes drive, local/remote keypad and enclosure.

SVX9000 Enclosed Drives



Pump Panel Style (Single-Phase)

		NEMA Type 12/IP54		NEMA Type 3R	
Enclosure Size ^①	hp	Frame Size	Base Catalog Number ^②	Frame Size	Base Catalog Number ^②
Low Overload Drive and Enclosure					
A	3/4	4	SVXF072KBP	4	SVXF073KBP
	1		SVX0012KBP		SVX0013KBP
	2		SVX0022KBP		SVX0023KBP
	3		SVX0032KBP		SVX0033KBP
	5	5	SVX0052KBP	5	SVX0053KBP
	7-1/2		SVX0072KBP		SVX0073KBP
	10		SVX0102KBP		SVX0103KBP
	15	6	SVX0152KBP	6	SVX0153KBP
B	20		SVX0202KBP		SVX0203KBP
	25	7	SVX0252KAP	7	SVX0253KAP
	30		SVX0302KAP		SVX0303KAP
C	40	8	SVX0402KAP	8	SVX0403KAP
	50		SVX0502KAP		SVX0503KAP
	60		SVX0602KAP		SVX0603KAP

Notes

- ① Enclosure dimensions starting on **Page V6-T2-92**.
- ② Includes drive, local/remote keypad and enclosure.

Options


9000X Series Option Board Kits

The 9000X Series drives can accommodate a wide selection of expander and adapter option boards to customize the drive for your application needs. The drive's control unit is designed to accept a total of five option boards.

The 9000X Series factory installed standard board configuration includes an A9 I/O board and an A2 relay output board, which are installed in slots A and B.

Option Boards

Option Board Kits



Option Kit Description ①	Allowed Slot Locations ②	Field Installed	Factory Installed	SVX Ready Programs						
		Catalog Number	Option Designator	Basic	Local/ Remote	Standard	MSS	PID	Multi-P.	PFC
Standard I/O Cards										
2 RO (NC-NO)	B	OPTA2	—	■	■	■	■	■	■	■
6 DI, 1 DO, 2 AI, 1AO, 1 +10 Vdc ref, 2 ext +24 Vdc/EXT +24 Vdc	A	OPTA9	—	■	■	■	■	■	■	■
Extended I/O Cards										
6 DI, 1 ext +24 Vdc/EXT +24 Vdc	B, C, D, E	OPTB1	B1	—	—	—	—	—	■	■
1 RO (NC-NO), 1 RO (NO), 1 therm	B, C, D, E	OPTB2	B2	—	—	—	—	—	■	■
1 AI (mA isolated), 2 AO (mA isolated), 1 ext +24 Vdc/EXT +24 Vdc	B, C, D, E	OPTB4	B4	■	■	■	■	■	■	■
3 RO (NO)	B, C, D, E	OPTB5	B5	—	—	—	—	—	■	■
1 ext +24 Vdc/EXT +24 Vdc, 3 Pt100	B, C, D, E	OPTB8	B8	—	—	—	—	—	—	—
1 RO (NO), 5 DI 42–240 Vac input	B, C, D, E	OPTB9	B9	—	—	—	—	—	■	■
Communication Cards ③										
Modbus	D, E	OPTC2	C2	■	■	■	■	■	■	■
Modbus TCP	D, E	OPTC1	C1	■	■	■	■	■	■	■
BACnet	D, E	OPTCJ	CJ	■	■	■	■	■	■	■
Ethernet IP	D, E	OPTCK	CK	■	■	■	■	■	■	■
Johnson Controls N2	D, E	OPTC2	CA	—	—	—	—	—	—	—
Profibus DP	D, E	OPTC3	C3	■	■	■	■	■	■	■
LonWorks	D, E	OPTC4	C4	■	■	■	■	■	■	■
Profibus DP (D9 connector)	D, E	OPTC5	C5	■	■	■	■	■	■	■
CanOpen (slave)	D, E	OPTC6	C6	■	■	■	■	■	■	■
DeviceNet	D, E	OPTC7	C7	■	■	■	■	■	■	■
Modbus (D9 type connector)	D, E	OPTC8	C8	■	■	■	■	■	■	■
RS-232 with D9 connection	D, E	OPTD3	D3	■	■	■	■	■	■	■
Keypad										
9000X Series local/remote keypad	—	KEYPAD-LOC/REM	—	—	—	—	—	—	—	—
9000X Series remote mount keypad kit	—	OPTRMT-KIT-9000X	—	—	—	—	—	—	—	—
9000X Series RS-232 cable, 13 ft	—	PP00104	—	—	—	—	—	—	—	—

Notes

① AI = Analog Input; AO = Analog Output; DI = Digital Input; DO = Digital Output; RO = Relay Output

② Option card must be installed in one of the slots listed for that card. Slot indicated in bold is the preferred location.

③ OPTC2 is a multi-protocol option card.

Modbus RTU Network Communications

The Modbus Network Card OPTC2 is used for connecting the 9000X Drive as a slave on a Modbus network. The interface is connected by a 9-pin DSUB connector (female) and the baud rate ranges from 300 to 19200 baud. Other communication parameters include an address range from 1 to 247; a parity of None, Odd or Even; and the stop bit is 1.

Profibus Network Communications

The Profibus Network Card OPTC3 is used for connecting the 9000X Drive as a slave on a Profibus-DP network. The interface is connected by a 9-pin DSUB connector (female). The baud rates range from 9.6K baud to 12M baud, and the addresses range from 1 to 127.

LonWorks Network Communications

The LonWorks Network Card OPTC4 is used for connecting the 9000X Drive on a LonWorks network. This interface uses Standard Network Variable Types (SNVT) as data types. The channel connection is achieved using a FTT-10A Free Topology transceiver via a single twisted transfer cable. The communication speed with LonWorks is 78 kBits/s.

CanOpen (Slave) Communications

The CanOpen (Slave) Network Card OPTC6 is used for connecting the 9000X Drive to a host system. According to ISO11898 standard cables to be chosen for CAN bus should have a nominal impedance of 120 ohms, and specific line delay of nominal 5 nS/m. 120 ohms line termination resistors required for installation.

DeviceNet Network Communications

The DeviceNet Network Card OPTC7 is used for connecting the 9000X Drive on a DeviceNet Network. It includes a 5.08 mm pluggable connector. Transfer method is via CAN using a two-wire twisted shielded cable with two-wire bus power cable and drain. The baud rates used for communication include 125K baud, 250K baud and 500K baud.

Johnson Controls Metasys N2 Network Communications

The OPTC2 fieldbus board provides communication between the 9000X Drive and a Johnson Controls Metasys™ N2 network. With this connection, the drive can be controlled, monitored and programmed from the Metasys system. The N2 fieldbus is available as a factory installed option and as a field installable kit.

Modbus/TCP Network Communications

The Modbus/TCP Network Card OPTC1 is used for connecting the 9000X Drive to Ethernet networks utilizing Modbus protocol. It includes an RJ-45 pluggable connector. This interface provides a selection of standard and custom register values to communicate drive parameters. The board supports 10 Mbps and 100 Mbps communication speeds. The IP address of the board is configurable over Ethernet using a supplied software tool.

BACnet Network Communications

The BACnet Network Card OPTCJ is used for connecting the 9000X Drive to BACnet networks. It includes a 5.08 mm pluggable connector. Data transfer is Master-Slave/Token Passing (MS/TP) RS-485. This interface uses a collection of 30 Binary Value Objects (BVOs) and 35 Analog Value Objects (AVOs) to communicate drive parameters. The card supports 9.6, 19.2 and 38.4 Kbaud communication speeds and supports network addresses 1–127.

Ethernet/IP Network Communications

The Ethernet/IP Network Card OPTCK is used for connecting the 9000X Drive to Ethernet/Industrial Protocol networks. It includes an RJ-45 pluggable connector. The interface uses CIP objects to communicate drive parameters (CIP is “Common Industrial Protocol”, the same protocol used by DeviceNet). The board supports 10 Mbps and 100 Mbps communication speeds. The IP address of the board is configurable by Static, BOOTP and DHCP methods.

Control/Communication Option Descriptions

For availability, see Product Selection for base drive voltage required.

Available Control/Communications Options

Option	Description	Option Type
K1	Door-Mounted Speed Potentiometer —Provides the SVX9000 with the ability to adjust the frequency reference using a door-mounted potentiometer. This option uses the 10 Vdc reference to generate a 0–10V signal at the analog voltage input signal terminal. When the HOA bypass option is added, the speed is controlled when the HOA switch is in the HAND position. Without the HOA bypass option, a two-position switch (labeled local/remote) is provided on the keypad to select speed reference from the Speed Potentiometer or a remote speed signal.	Control
K2	Door-Mounted Speed Potentiometer with HOA Selector Switch —Provides the SVX9000 with the ability to start/stop and adjust the speed reference from door-mounted control devices or remotely from customer supplied inputs. In HAND position, the drive will start and the speed is controlled by the door-mounted speed potentiometer. The drive will be disabled in the OFF position. When AUTO is selected, the drive run and speed control commands are via user-supplied dry contact and 4–20 mA signal.	Control
K5	MANUAL/AUTO Speed Reference Switch —Provides a door-mounted selector switch for MANUAL/AUTO speed reference.	Control
K6	START and STOP Pushbuttons (22 mm) —START (green) STOP (red). Provide door-mounted START and STOP pushbuttons for either bypass or non-bypass configurations.	Control
K9	(2) Factory Installed Auxiliary Contacts —Provide two NO/NC auxiliary contacts.	Power
L1	Power On and Fault Pilot Lights —Provide a white power on light that indicates power to the enclosed cabinet and a red fault light that indicates a drive fault has occurred.	Light
L2	Bypass Pilot Lights for RB, RA Bypass Options —A green light indicates when the motor is running in inverter mode and an amber light indicates when the motor is running in bypass mode. The lights are mounted on the enclosure door, above the switches.	Addl. Bypass
LD	Green STOP Light (22 mm) —Provides a green light that indicates the drive is stopped.	Light
LE	Red RUN Pilot Light (22 mm) —Provides a red run pilot light that indicates the drive is running.	Light
LU	Misc. Light (22 mm) —Provides a misc. “user defined” pilot light. User to define light function and color.	Light
LW	PTT (Push-To-Test) Light (22 mm) —Provides misc. “user defined” PTT pilot light. User to define light function and color.	Light
LY	Adder for LED Each —Changes light packages from standard incandescent bulb to LED style bulb.	Light
P1	Input Disconnect Assembly Rated to 100 kAIC —High Interrupting Motor Circuit Protector (HMCP) that provides a means of short circuit protection for the power cables between it and the SVX9000, and protection from high-level ground faults on the power cable. Allows a convenient means of disconnecting the SVX9000 from the line and the operating mechanism can be padlocked in the OFF position. This is factory mounted in the enclosure.	Input
P3	Input Line Fuses Rated to 200 kAIC —Provide high-level fault protection of the SVX9000 input power circuit from the load side of the fuses to the input side of the power transistors. This option consists of three 200 kA fuses, which are factory mounted in the enclosure.	Input
P7	MOV Surge Suppressor —Provides a Metal Oxide Varistor (MOV) connected to the line side terminals and is designed to clip line side transients.	Input
P8	TVSS Transient Voltage Surge Suppressor —Provides transient voltage surge suppression of the unit. Consult factory for ratings.	Input
PE	Output Contactor —Provides a means for positive disconnection of the drive output from the motor terminals. The contactor coil is controlled by the drive's run or permissive logic. NC and NO auxiliary contacts rated at 10A, 600 Vac are provided for customer use. Bypass option RA includes an output contactor as standard. This option includes a low VA 115 Vac fused control power transformer and is factory mounted in the enclosure.	Output
RA	Manual HOA Bypass Controller —The Manual HAND/OFF/AUTO (HOA)—3-contactor—bypass option provides a means of bypassing the SVX9000, allowing the AC motor to be operated at full speed directly from the AC supply line. This option consists of an input disconnect, a fused control power transformer, and a full voltage bypass starter with a door mounted HOA selector switch and an INVERTER/BYPASS switch. The HOA switch provides the ability to start and stop the drive in the inverter mode. For applications up to 100 hp, a Freedom Series IEC input contactor, a Freedom Series IEC output contactor, and a Freedom Series IEC starter with a bimetallic overload relay is included. For applications above 100 hp, an Advantage input contactor, an Advantage output contactor and an Advantage starter with electronic overload protection is included. The contactors are mechanically and electrically interlocked (see power diagram on Page V6-T2-91).	Bypass
S5	Floor Stand 22 in —Converts a Size A or B, normally wall mounted enclosure to a floor standing enclosure with a height of 22 in (558.8 mm).	Enclosure
S9	Space Heater without CPT —Prevents condensation from forming in the enclosure when the drive is inactive or in storage. Includes a thermostat for variable temperature control. A 200W heater is installed in enclosures A and B, and 400W heater is installed in enclosures C and D. Requires a customer supplied 115V remote supply source.	Enclosure
SA	Space Heater with CPT —Prevents condensation from forming in the enclosure when the drive is inactive or in storage. Includes a thermostat for variable temperature control. A 200W heater is installed in enclosures A and B, and 400W heater is installed in enclosures C and D. Provided with CPT connected to load side of input disconnect.	Enclosure
SB	Ice Cube Style Control Relay —Provides misc. “user defined” 4PDT control relay. Requires user to define functionality.	Enclosure
SE	On-Delay Timer (Delay on Make) —Provides misc. “user defined” time delay relay. Requires user to define functionality and time setting requirement.	Enclosure
SF	Off-Delay Timer (Delay on Break) —Provides misc. “user defined” time delay relay. Requires user to define functionality and time setting requirement.	Enclosure

VFD Pump Panel Options**Brake Chopper Options** ^①

208V and 230V: NEMA Type 12/IP54/3R, I_H hp 3/4 to 100;

I_L hp 1 to 100

480V: NEMA Type 12/IP54/3R, I_H hp 1 to 400; I_L hp 1-1/2 to 400

208V and 230V Control Options, 3/4–100 hp ^②

Description	Catalog Number Suffix
Door-mounted speed potentiometer	K1
Door-mounted speed potentiometer with HOA selector switch	K2
Manual/auto reference switch (22 mm)	K5
START and STOP pushbuttons (22 mm)	K6

480V Control Options, 1–800 hp ^②

Description	Catalog Number Suffix
Door-mounted speed potentiometer	K1
Door-mounted speed potentiometer with HOA selector switch	K2
Manual/auto reference switch (22 mm)	K5
START and STOP pushbuttons (22 mm)	K6

208V and 230V Light Options, 3/4–100 hp ^②

Description	Catalog Number Suffix
Power on/fault pilot lights (22 mm)	L1
Green STOP light (22 mm)	LD
Red RUN light (22 mm)	LE
Misc. light (22 mm)	LU
PTT light (22 mm)	LW
LED	LY

480V Light Options, 1–800 hp ^②

Description	Catalog Number Suffix
Power on/fault pilot lights (22 mm)	L1
Green STOP light (22 mm)	LD
Red RUN light (22 mm)	LE
Misc. light (22 mm)	LU
PTT light (22 mm)	LW
LED	LY

Notes

^① External dynamic braking resistors not included. Consult factory.

^② Consult factory for adder information.

^③ See **Page V6-T2-87** for details.

^④ Bypass options applicable only in the pump panel three-phase design.

208V, 230V and 480V Enclosure Options, Sizes A–D ^②

Description	Catalog Number Suffix
Floor stand 22 in (558.8 mm)	S5
Space heater without CPT	S9
Space heater with CPT	SA
Socket type control relay	SB
On-delay timer	SE
Off-delay timer	SF

208 and 230V Power Options, 3/4–100 hp ^②

Description	Catalog Number Suffix
Two auxiliary contacts installed	K9
Input disconnect (HMCP) 100 kAIC	P1
Input line fuses 200 kAIC	P3
Input power surge protection	P7
TVSS transient voltage surge suppressor	P8
Output contactor	PE

480V Power Options, 1–400 hp ^②

Description	Catalog Number Suffix
Two auxiliary contacts installed	K9
Input disconnect (HMCP) 100 kAIC	P1
Input line fuses 200 kAIC	P3
Input power surge protection	P7
TVSS transient voltage surge suppressor	P8
Output contactor	PE

208 and 230V Bypass Options, 3/4–100 hp ^{②③}

Description	Catalog Number Suffix
Bypass pilot lights for RA option	L2 ^④
Manual HOA bypass controller	RA ^④

480V Bypass Options, 1–400 hp ^{②③}

Description	Catalog Number Suffix
Bypass pilot lights for RA option	L2 ^④
Manual HOA bypass controller	RA ^④

Technical Data and Specifications

9000X VFD Pump Panels

Description	NEMA Type 12/IP54 or NEMA Type 3R Specification
Primary Design Features	
45–66 Hz input frequency	Standard
Output (AC volts maximum)	Input voltage base
Output frequency range	0–320 Hz
Initial output current (I_H)	250% for 2 seconds
Overload (1 minute [I_H/I_L])	150%/110%
Enclosure space heater	Optional
Oversize enclosure	Standard
Output contactor	Optional
Bypass motor starter	Optional
Listings	UL, cUL
Protection Features	
Incoming line fuses	Optional
AC input circuit disconnect	Optional
Line reactors	Standard
Phase rotation insensitive	Standard
EMI filter	Standard—Thru Frame 9
Input phase loss protection	Standard
Input overvoltage protection	Standard
Line surge protection	Standard
Output short circuit protection	Standard
Output ground fault protection	Standard
Output phase protection	Standard
Overtemperature protection	Standard
DC overvoltage protection	Standard
Drive overload protection	Standard
Motor overload protection	Standard
Programmer software	Optional
Local/remote keypad	Standard
Keypad lockout	Standard
Fault alarm output	Standard
Built-in diagnostics	Standard

Description	NEMA Type 12/IP54 or NEMA Type 3R Specification
Input/Output Interface Features	
Setup adjustment provisions	
Remote keypad/display	Standard
Personal computer	Standard
Operator control provisions	
Drive mounted keypad/display	Standard
Remote keypad/display	Standard
Conventional control elements	Standard
Serial communications	Optional
115 Vac control circuit	Optional
Speed setting inputs	
Keypad	Standard
0–10 Vdc potentiometer/voltage signal	Standard
4–20 mA isolated	Configurable
4–20 mA differential	Configurable
Analog outputs	
Speed/frequency	Standard
Torque/load/current	Programmable
Motor voltage	Programmable
Kilowatts	Programmable
0–10 Vdc signals	Configurable w/jumpers
4–20 mA DC signals	Standard
Isolated signals	Optional
Discrete outputs	
Fault alarm	Standard
Drive running	Standard
Drive at set speed	Programmable
Optional parameters	14
Dry contacts	1 (2 relays Form C)
Open collector outputs	1
Additional discrete outputs	Optional
Communications	
RS-232	Standard
RS-422/485	Optional
DeviceNet™	Optional
Modbus RTU	Optional
CanOpen (slave)	Optional
Profibus-DP	Optional
Lonworks®	Optional
Johnson Controls Metasys™ N2	Optional

9000X VFD Pump Panels, continued

Description	NEMA Type 12/IP54 or NEMA Type 3R Specification
Performance Features	
Sensorless vector control	Standard
Volts/hertz control	Standard
IR and slip compensation	Standard
Electronic reversing	Standard
Dynamic braking	Optional ①
DC braking	Standard
PID setpoint controller	Programmable
Critical speed lockout	Standard
Current (torque) limit	Standard
Adjustable acceleration/deceleration	Standard
Linear or S curve accel/decel	Standard
Jog at preset speed	Standard
Thread/preset speeds	7
Automatic restart	Selectable
Coasting motor start	Standard
Coast or ramp stop selection	Standard
Elapsed time meter	Optional
Carrier frequency adjustment	1–16 kHz
Standard Conditions for Application and Service	
Operating ambient temperature	0 to 40°C
Storage temperature	–40 to 60°C
Humidity (maximum), non-condensing	95%
Altitude (maximum without derate)	3300 ft (1000m)
Line voltage variation	+10/–15%
Line frequency variation	45–66 Hz
Efficiency	>96%
Power factor (displacement)	0.96

Standard I/O Specifications

Description	Specification
Six–digital input programmable	24V: “0” ≤10V, “1” ≥18V, R_i >5 kohms
Two–analog input configurable w/jumpers	Voltage: 0–±10V, R_i >200 kohms Current: 0 (4)–20 mA, R_i = 250 ohms
Two–digital output programmable	Form C relays 250 Vac 30 Vdc 2 amp resistive
One–analog output programmable configurable w/jumper	0–20 mA, R_L max. 500 ohms 10 bits ±2%
One digital output programmable	Open collector 48 Vdc 50 mA

I/O Specifications for Control/Communication Options


Description	Specification
Analog voltage, input	0–±10V, R_i ≥200 kohms
Analog current, input	0 (4)–20 mA, R_i = 250 ohms
Digital input	24V: “0” ≤10V, “1” ≥18V, R_i >5 kohms
Auxiliary voltage	24V (±20%), max. 50 mA
Reference voltage	10V ±3%, max. 10 mA
Analog current, output	0 (4)–20 mA, R_L = 500 kohms, resolution 10 bit, accuracy ≤±2%
Analog voltage, output	0 (2)–10V, R_L ≥1 k kohms, resolution 10 bit, accuracy ≤±2%
Relay output	
Maximum switching voltage	300 Vdc, 250 Vac
Maximum switching load	8A/24 Vdc, 0.4A/300 Vdc, 2 kVA/250 Vac
Maximum continuous load	2A rms
Thermistor input	R_{trip} = 4.7 kohms

Note


① Some horsepower units include dynamic braking chopper as standard—refer to individual drive sections.

Wiring Diagrams


Power Diagram for Bypass Option RA

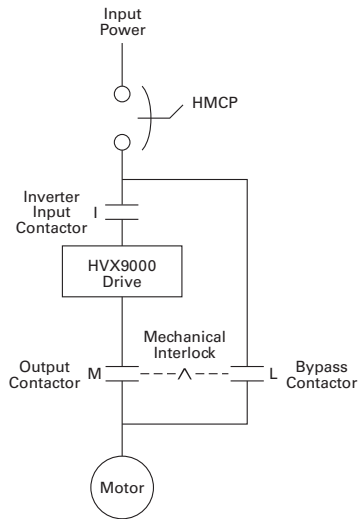


A2 Board Control Wiring

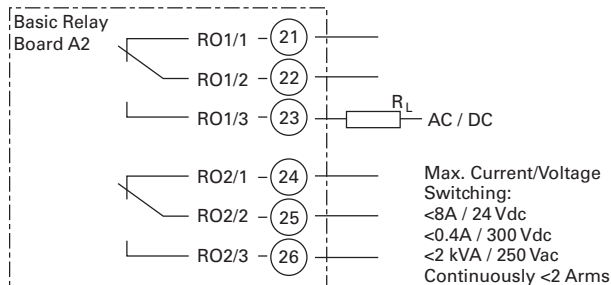


A9 Board Control Wiring

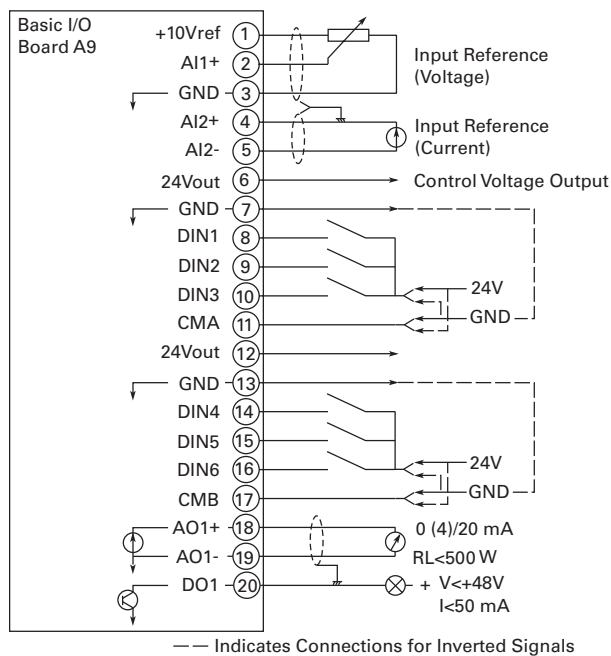

SVX9000 Pump Panel Bypass Power Wiring

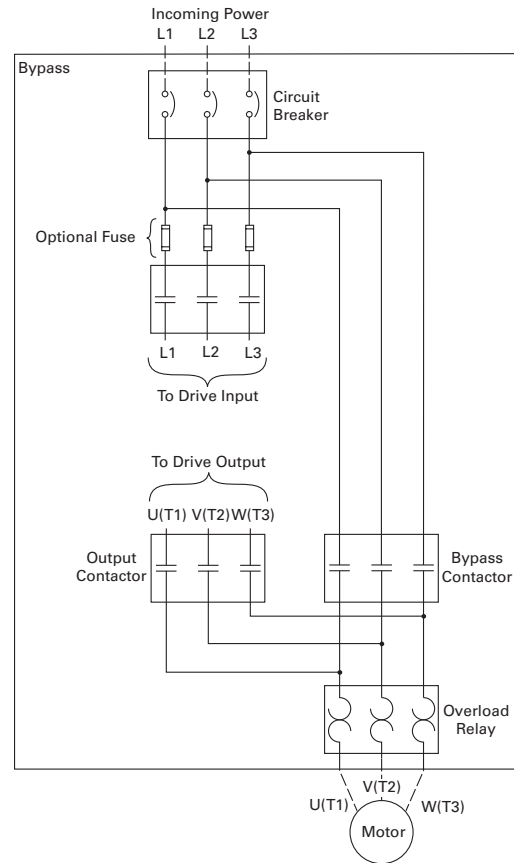

SVX9000 Pump Panel Disconnect Power Wiring

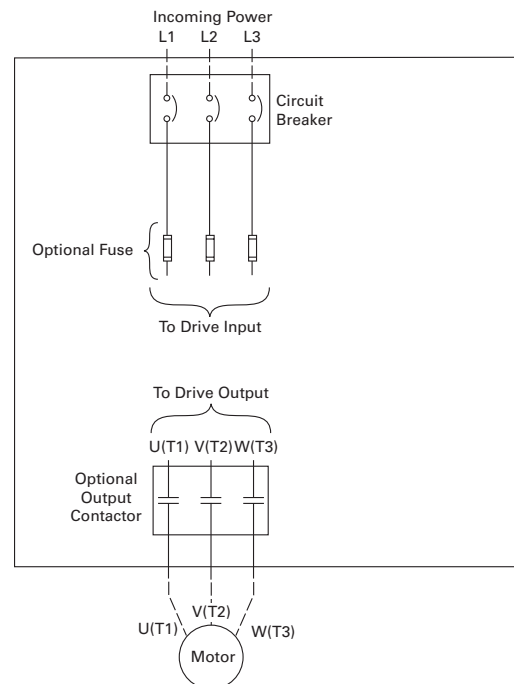

2.3

Adjustable Frequency Drives

SVX9000 Drives


Dimensions

Approximate Dimensions in Inches (mm)

2


SVX9000 Pump Application Drives

Enclosure Box A NEMA Type 12/IP54

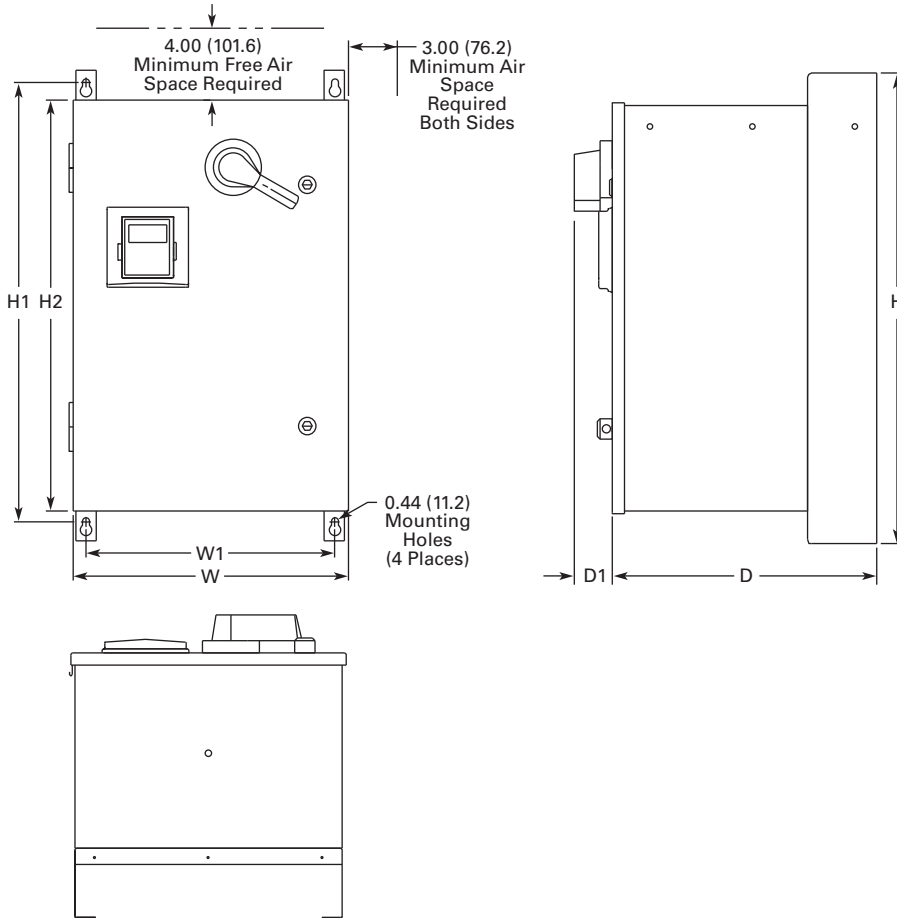

Voltage AC	hp (I _H)	hp (I _L)	H	H1	H2	W	W1	D	D1	Approx. Weight Lbs (kg)	Approx. Shipping Weight Lbs (kg)
Three-Phase											
208V	3/4–10	1–15	29.00 (736.6)	27.00 (685.8)	25.35 (643.9)	16.92 (429.8)	15.30 (388.6)	16.26 (413.0)	2.34 (59.4)	120 (54)	160 (73)
230V	3/4–10	1–15									
480V	1–25	1–30									
Single-Phase											
230V	—	3/4–10	29.00 (736.6)	27.00 (685.8)	25.35 (643.9)	16.92 (429.8)	15.30 (388.6)	16.26 (413.0)	2.34 (59.4)	120 (54)	160 (73)
480V	—	3/4–20									

Approximate Dimensions in Inches (mm)

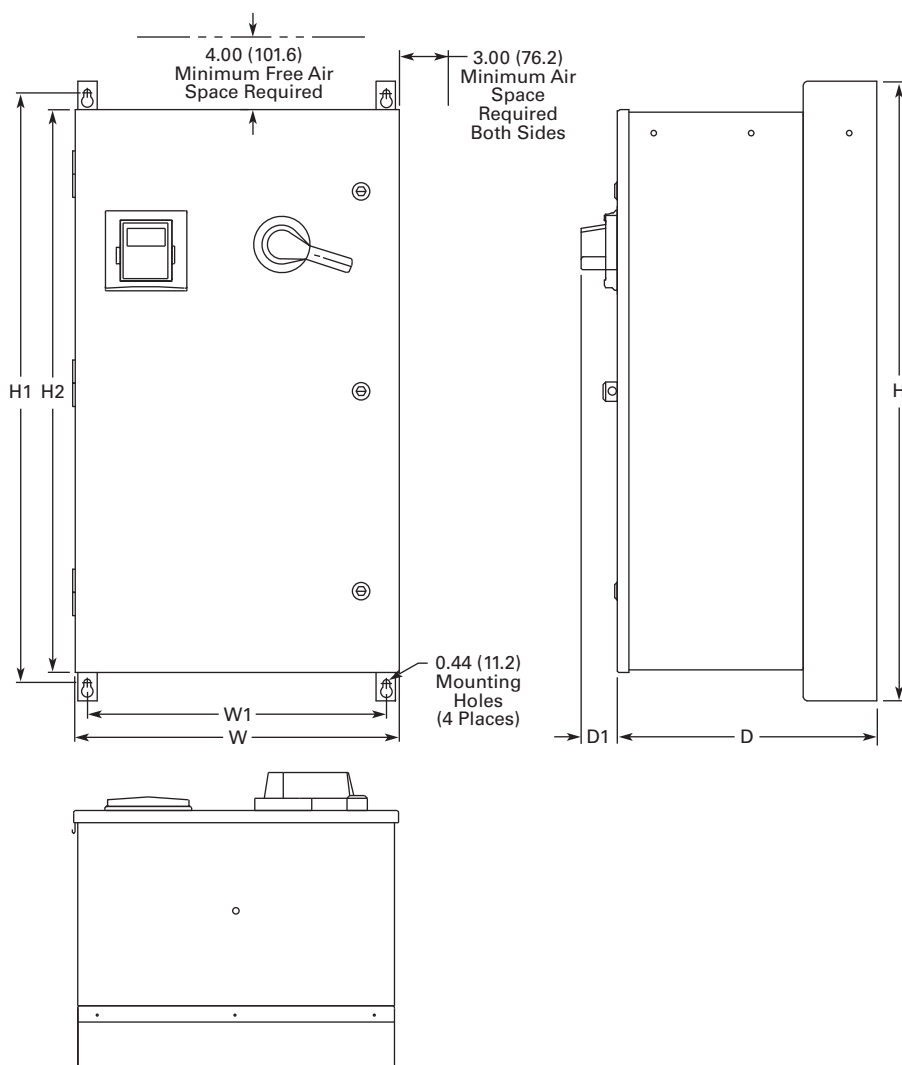Enclosure Box B NEMA Type 12/IP54

Voltage AC	hp (I _H)	hp (I _L)	H	H1	H2	W	W1	D	D1	Approx. Weight Lbs (kg)	Approx. Shipping Weight Lbs (kg)
Three-Phase											
208V	15–25	20–30	40.00 (1016.0)	38.00 (965.2)	36.35 (923.3)	20.92 (531.4)	19.30 (490.2)	16.76 (425.7)	2.34 (59.4)	185 (84)	229 (104)
230V	15–25	20–30									
480V	30–60	40–75									
Single-Phase											
230V	—	15–20	40.00 (1016.0)	38.00 (965.2)	36.35 (923.3)	20.92 (531.4)	19.30 (490.2)	16.76 (425.7)	2.34 (59.4)	185 (84)	229 (104)
480V	—	25–30									

2.3


Adjustable Frequency Drives

SVX9000 Drives

Approximate Dimensions in Inches (mm)

Enclosure Box C NEMA Type 12/IP54

2

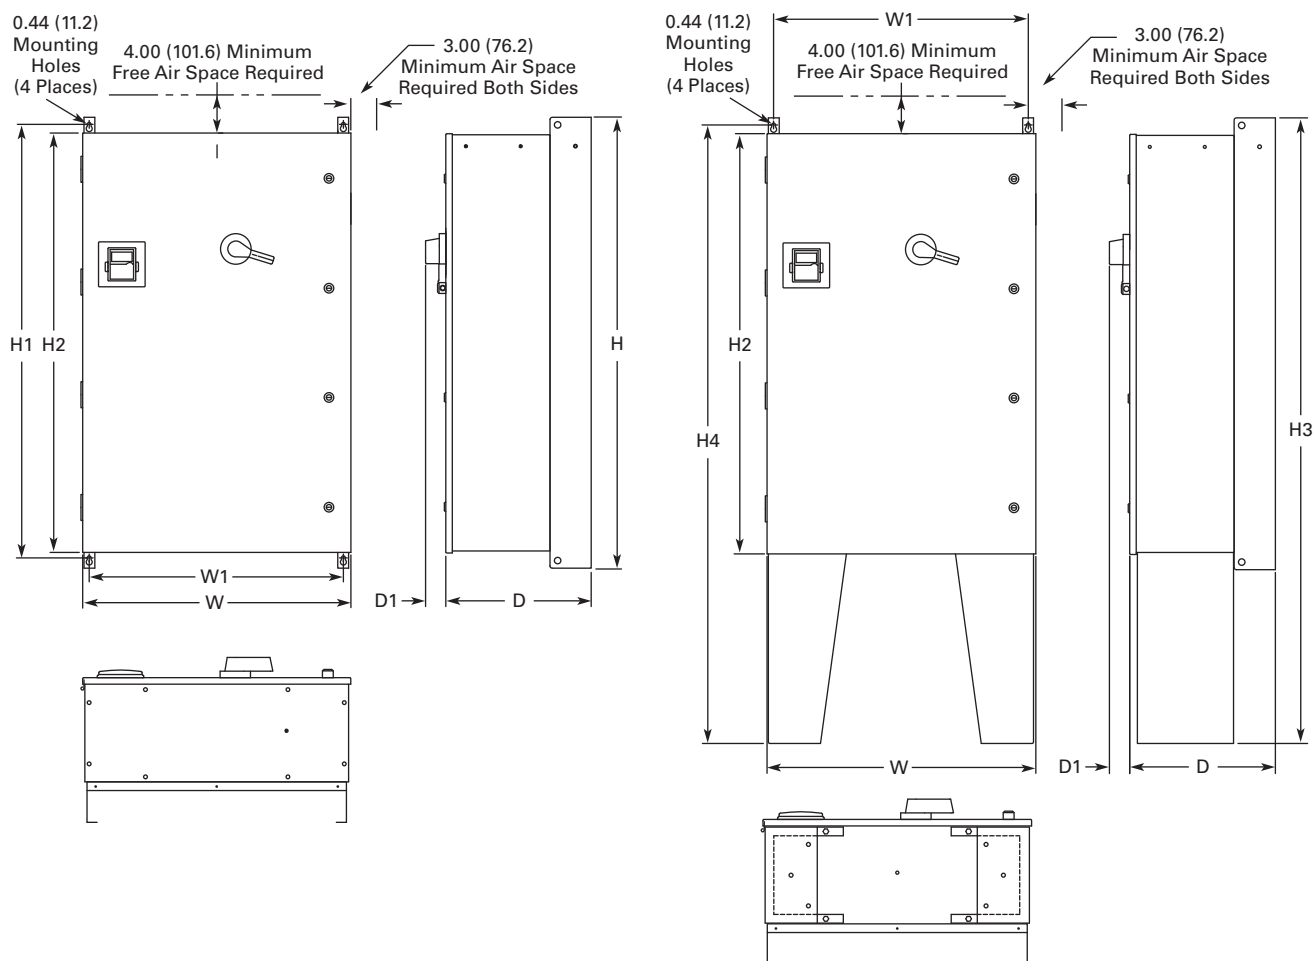


Voltage AC	hp (I _H)	hp (I _L)	H	H1	H2	H3	H4	W	W1	D	D1	Approx. Shipping Weight Lbs (kg)
Three-Phase												
208V	30–50	40–60	52.00 (1320.8)	50.00 (1270.0)	48.35 (1228.1)	72.00 (1828.8)	71.19 (1808.2)	30.92 (785.4)	29.30 (744.2)	16.78 (426.2)	2.34 (59.4)	①
230V	30–50	40–60										
480V	75–125	100–150										
Single-Phase												
230V	—	25–40	52.00 (1320.8)	50.00 (1270.0)	48.35 (1228.1)	72.00 (1828.8)	71.19 (1808.2)	30.92 (785.4)	29.30 (744.2)	16.78 (426.2)	2.34 (59.4)	①
480V	—	40–60										

Note

① Consult factory.

Approximate Dimensions in Inches (mm)

Enclosure Box A NEMA Type 3R

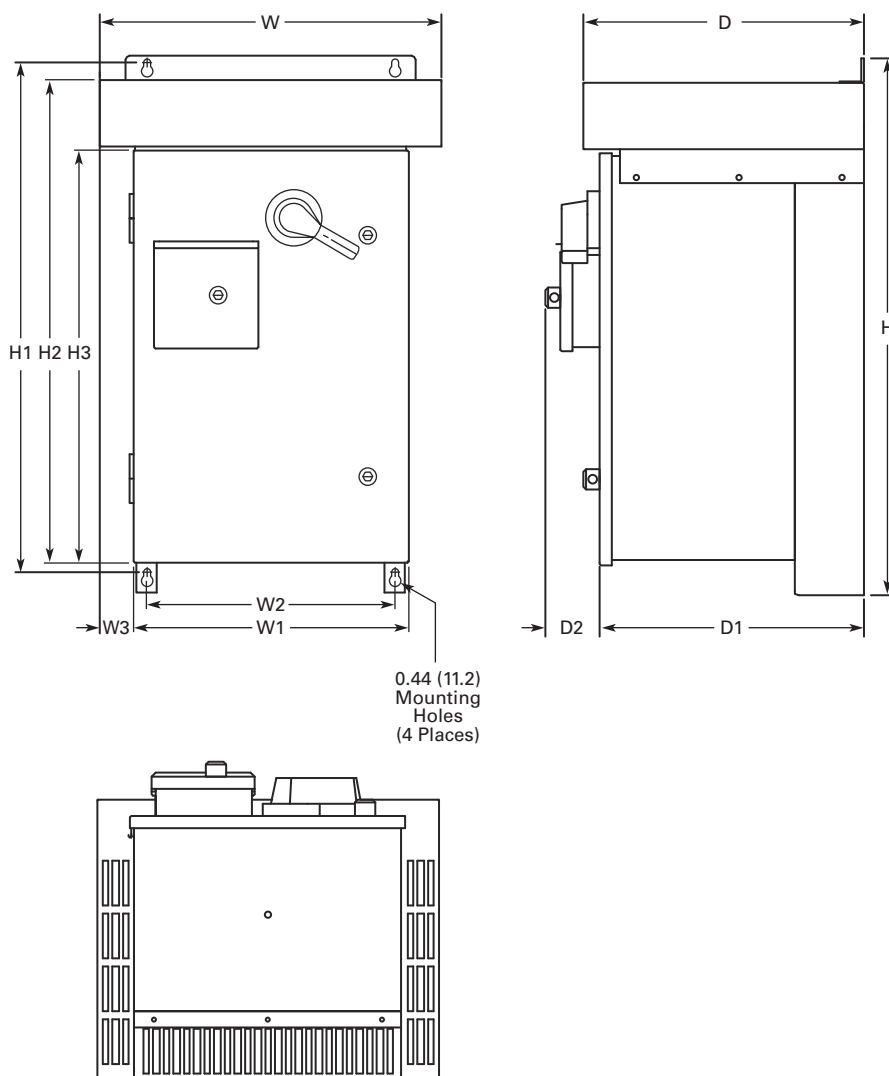

Voltage AC	hp (I _H)	hp (I _L)	H	H1	H2	H3	W	W1	W2	W3	D	D1	D2	Approx. Weight Lbs (kg)	Approx. Shipping Weight Lbs (kg)
Three-Phase															
208V	3/4–10	1–15	33.00 (838.2)	31.36 (796.5)	29.67 (753.6)	25.35 (643.9)	21.05 (534.7)	16.92 (429.8)	15.30 (388.6)	2.07 (52.6)	17.24 (437.9)	16.26 (413.0)	3.31 (840.1)	170 (77)	215 (98)
230V	3/4–10	1–15													
480V	1–25	1–30													
Single-Phase															
230V	—	3/4–10	33.00 (838.2)	31.36 (796.5)	29.67 (753.6)	25.35 (643.9)	21.05 (534.7)	16.92 (429.8)	15.30 (388.6)	2.07 (52.6)	17.24 (437.9)	16.26 (413.0)	3.31 (840.1)	170 (77)	215 (98)
480V	—	3/4–20													

2.3


Adjustable Frequency Drives

SVX9000 Drives

Approximate Dimensions in Inches (mm)

Enclosure Box B NEMA Type 3R


2

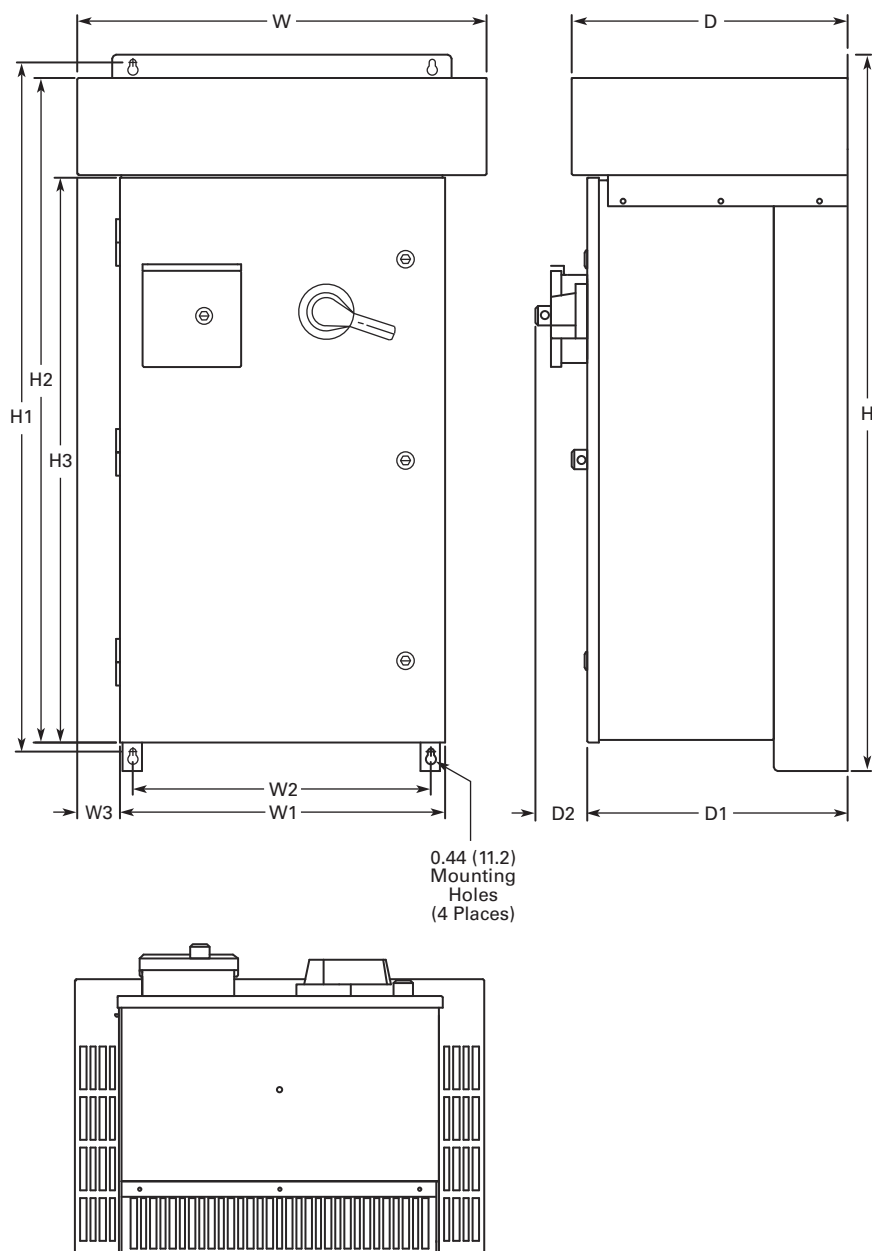

Voltage AC	hp (I _H)	hp (I _L)	H	H1	H2	H3	W	W1	W2	W3	D	D1	D2	Approx. Weight Lbs (kg)	Approx. Shipping Weight Lbs (kg)
Three-Phase															
208V	15–25	20–30	46.09 (1170.7)	44.45 (1129.0)	42.77 (1086.4)	36.35 (923.3)	26.31 (668.3)	20.92 (531.4)	19.30 (490.2)	2.69 (68.3)	17.74 (450.6)	16.76 (425.7)	3.31 (840.1)	235 (107)	290 (132)
230V	15–25	20–30													
480V	30–60	40–75													
Single-Phase															
230V	—	15–20	46.09 (1170.7)	44.45 (1129.0)	42.77 (1086.4)	36.35 (923.3)	26.31 (668.3)	20.92 (531.4)	19.30 (490.2)	2.69 (68.3)	17.74 (450.6)	16.76 (425.7)	3.31 (840.1)	235 (107)	290 (132)
480V	—	25–30													

Approximate Dimensions in Inches (mm)

Enclosure Box C NEMA Type 3R

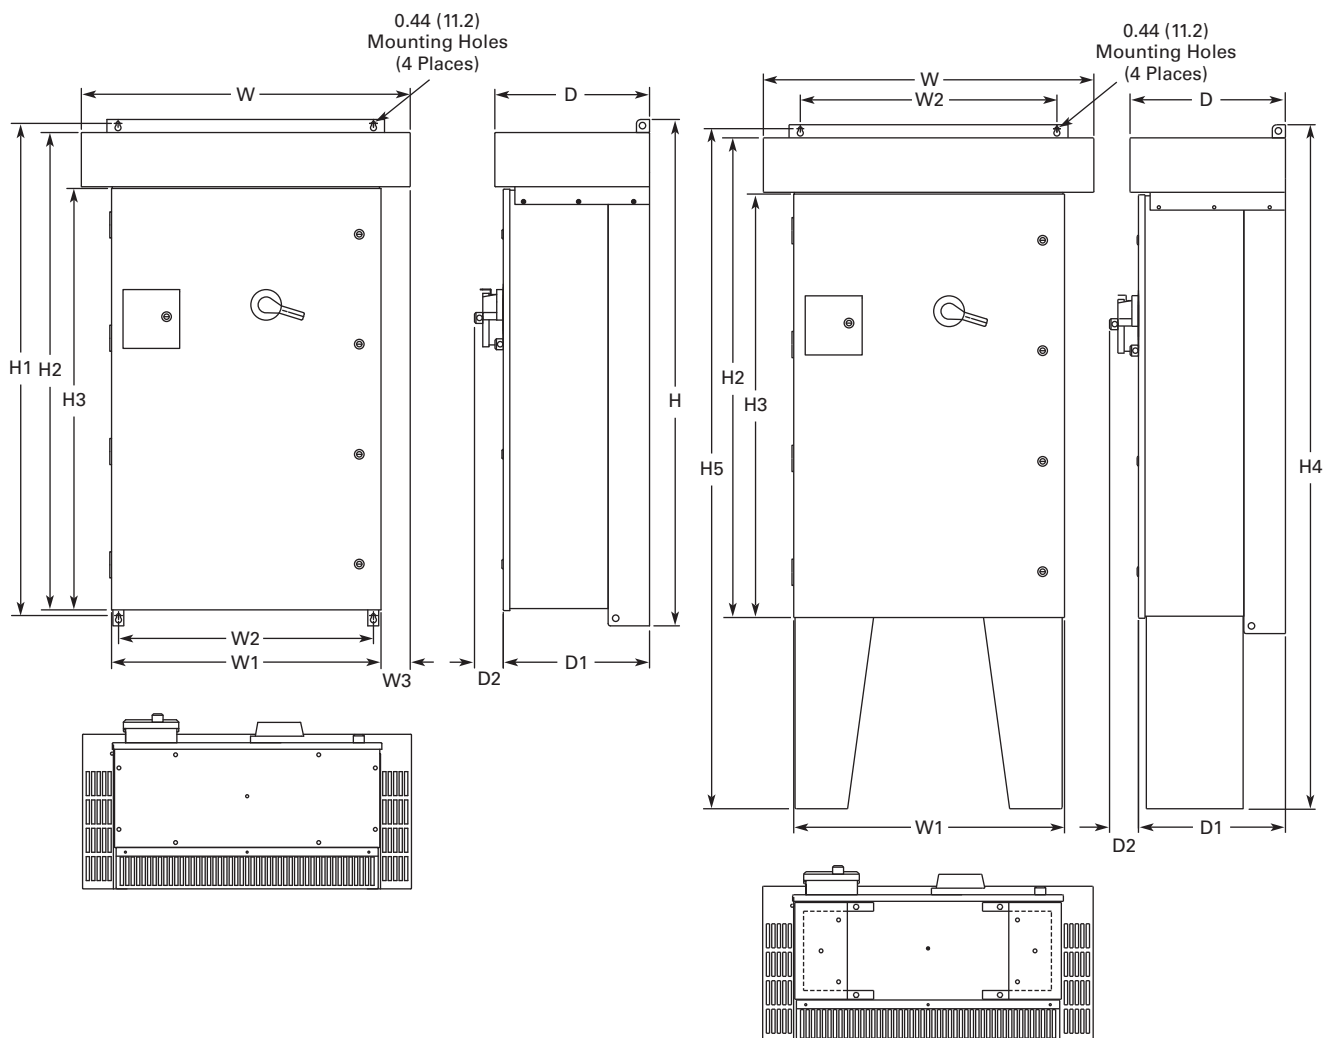

Voltage AC	hp (I _H)	hp (I _L)	H	H1	H2	H3	H4	H5	W	W1	W2	W3	D	D1	D2	Approx. Weight Lbs (kg)
Three-Phase																
208	30–50	40–60	58.09 (1475.5)	56.45 (1433.8)	54.77 (1391.2)	48.35 (1228.1)	78.09 (1983.5)	77.64 (1972.1)	37.73 (958.3)	30.92 (785.4)	29.30 (744.2)	3.34 (84.8)	17.74 (450.6)	16.77 (426.0)	3.31 (840.1)	①
230	30–50	40–60														
480	75–125	100–150														
Single-Phase																
230V	—	25–40	58.09 (1475.5)	56.45 (1433.8)	54.77 (1391.2)	48.35 (1228.1)	78.09 (1983.5)	77.64 (1972.1)	37.73 (958.3)	30.92 (785.4)	29.30 (744.2)	3.34 (84.8)	17.74 (450.6)	16.77 (426.0)	3.31 (840.1)	①
480V	—	40–60														

Note

① Consult factory.

SPX9000 Drives

2



Product Description

The SPX9000 Series Adjustable Frequency Drives from Eaton's electrical sector are specifically designed for high performance applications. Equipped with high processing power, the SPX9000 can use information from an encoder or a resolver in order to provide very precise motor control. Sensorless vector and simple frequency control are also supported. Typical applications requiring high performance are: master-slave drives, positioning applications, winder tension control and synchronization.

The core of the SPX9000 is a fast microprocessor, providing high dynamic performance for applications where good motor handling and reliability are required. It can be used both in open loop applications as well as in applications requiring encoder feedback.

The SPX9000 supports fast drive-to-drive communication. It also offers an integrated data logger functionality for analysis of dynamic events without the need of additional hardware. Simultaneous fast monitoring of several drives can be done by using the 9000Xdrive tool and CAN communication. In applications where reliability and quality are essential for high-performance, the SPX9000 is the logical choice.

Contents

Description

SPX9000 Drives

Features and Benefits	V6-T2-99
Standards and Certifications	V6-T2-99
Catalog Number Selection	V6-T2-100
Product Selection	V6-T2-101
Accessories	V6-T2-106
Options	V6-T2-107
Replacement Parts	V6-T2-112
Technical Data and Specifications	V6-T2-120
Dimensions	V6-T2-121

The Eaton family of drives includes HVX9000, H-Max, M-Max, SVX9000, SLX9000 and SPX9000. 9000X Series drive ratings are rated for either high overload (I_H) or low overload (I_L). I_L indicates 110% overload capacity for 1 minute out of 10 minutes. I_H indicates 150% overload capacity for 1 minute out of 10 minutes.

Features and Benefits

- Speed error <0.01 %, depending on the encoder
- Incremental or absolute encoder support
- Encoder voltages of 5V (RS-422), 15V or 24V, depending on the option card
- Full torque control at all speeds, including zero
- Torque accuracy <2%; <5% down to zero speed
- Starting torque >200%, depending on motor and drive sizing
- Integrated datalogger for system analysis
- Fast multiple drive monitoring with PC
- Full capability for master/slave configurations
- High-speed bus (12 Mbit/s) for fast inter-drive communication
- High-speed applications (up to 7200 Hz) possible
- Robust design—proven 500,000 hours MTBF
- Integrated 3% line reactors standard on drives from FR4 through FR9
- Line reactor is included but is separated from chassis
- EMI/RFI Filters H standard up to 200 hp I_H 480V, 100 hp I_H 230V
- Simplified operating menu allows for typical programming changes, while programming mode provides control of everything
- Quick Start Wizard built into the programming of the drive ensures a smooth start-up
- Keypad can display up to three monitored parameters simultaneously
- LOCAL/REMOTE operation from keypad
- Copy/paste function allows transfer of parameter settings from one drive to the next
- Standard NEMA Type 12/IP54 keypad on all drives
- Hand-held auxiliary 240 power supply allows programming/monitoring of control module without applying full power to the drive
- The SPX can be flexibly adapted to a variety of needs using our pre-installed “Seven in One” precision application programs consisting of:
 - Basic
 - Standard
 - Local/remote
 - Multi-step speed control
 - PID control
 - Multi-purpose control
 - Pump and fan control with auto change
- Additional I/O and communication cards provide plug and play functionality
- I/O connections with simple quick connection terminals
- Control logic can be powered from an external auxiliary control panel, internal drive functions and fieldbus if necessary
- Brake chopper standard from: 1–30 hp/380–500V 3/4–15 hp/208–230V
- NEMA Type 1/IP21 enclosures available Frame Sizes FR4–FR11, NEMA Type 12/IP54 enclosures available Frame Sizes FR4–FR10 (FR10 and FR11 freestanding drives)
- Open chassis FR10 and greater
- Standard option board configuration includes an A9 I/O board and an A2 relay output board installed in slots A and B

Standards and Certifications

Product

- IEC 61800-2

Safety

- UL 508C

EMC (at default settings)

- Immunity: Fulfills all EMC immunity requirements; Emissions: EN 61800-3, LEVEL H


- UL Listed




Catalog Number Selection

SPX9000 Adjustable Frequency Drives

2

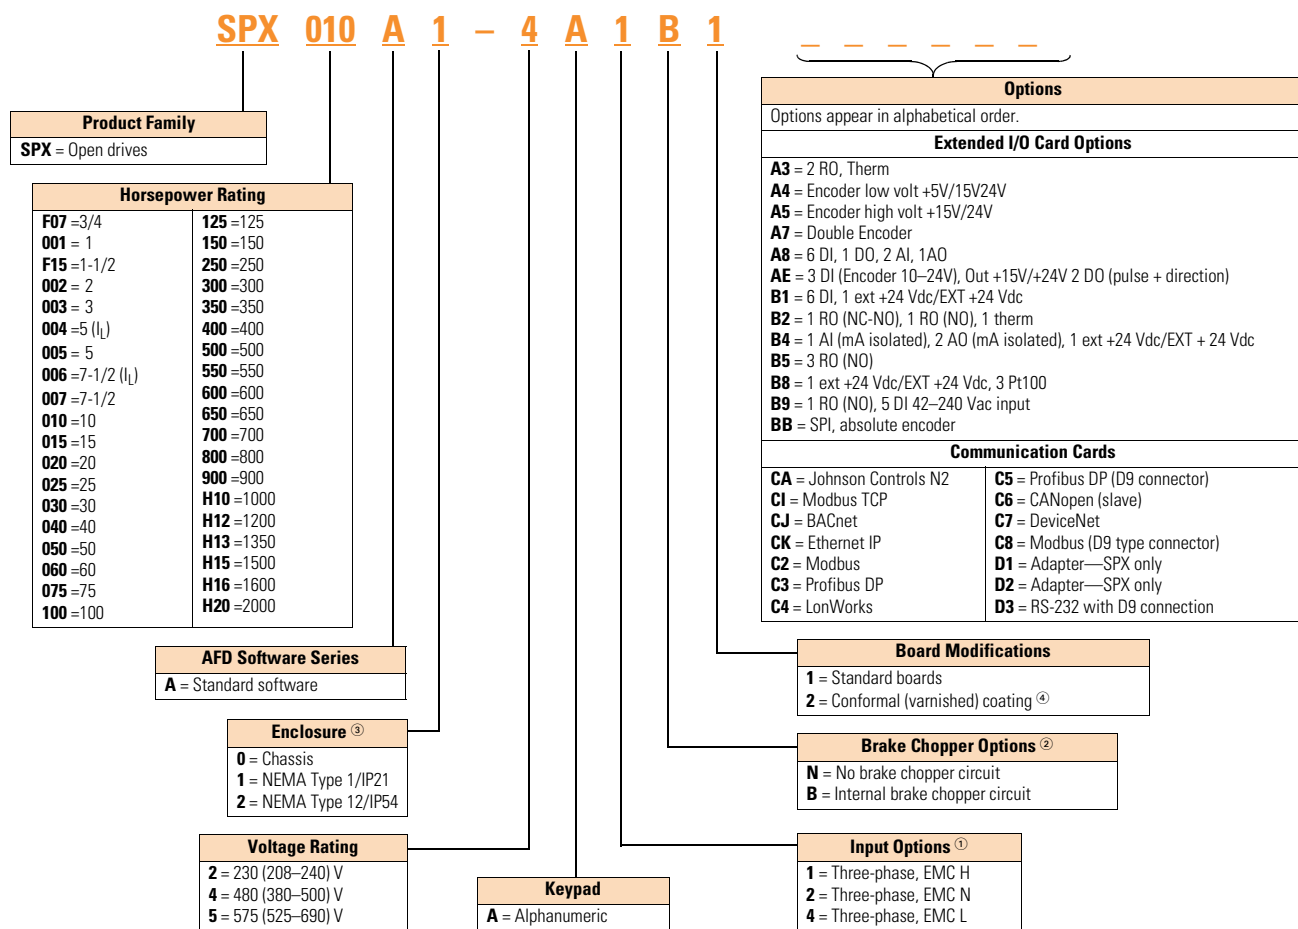

Power Module

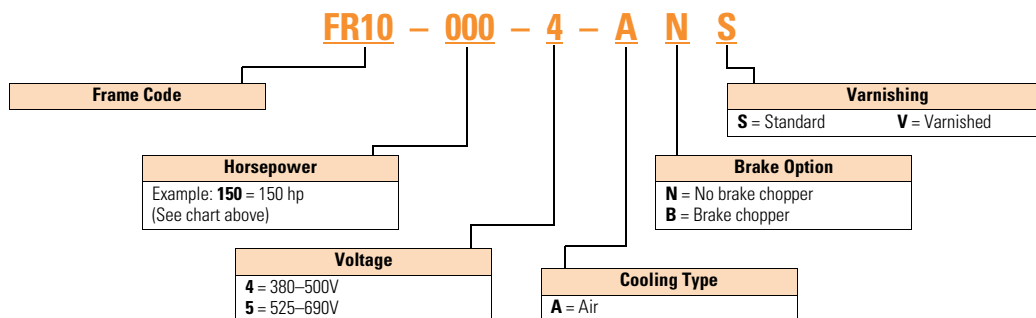

Notes

- ① All 230V drives and 480V drives up to 200 hp (I_L) are only available with input option 1 (EMC level H). 480V drives 250 hp (I_L) or larger are available with input option 2 (EMC level N). 575V drives 200 hp (I_L) or larger are available with input option 2. 575V drives up to 150 hp (I_L) are available with input option 4 (EMC level L). 480V and 690V freestanding drives are available with input option 4 (EMC level L).
- ② 480V drives up to 30 hp (I_L) are only available with brake chopper option B. 480V drives 40 hp (I_L) or larger come standard with brake chopper option N. 230V drives up to 15 hp (I_L) are only available with brake chopper option B. 230V drives 20 hp and larger come standard with brake chopper option N. All 575V drives come standard without brake chopper option (N). N = No brake chopper.
- ③ 480V drives 250–350 hp (I_L) and 690V drives 200–300 hp (I_L) are available with enclosure style 0 (chassis). 480V and 690V FR10 freestanding drives are available with 1 (NEMA Type 1/IP21) or 2 (NEMA Type 12/IP54). FR11 freestanding drives are only available with enclosure style 1 (NEMA Type 1/IP21).
- ④ Factory promise delivery. Consult sales office for availability.

Product Selection

230V Drives

SPX9000 Open Drives



208–240V, NEMA Type 1/IP21 Drives

Frame Size	Delivery Code	hp (I _H)	Current (I _H)	hp (I _L)	Current (I _L)	Catalog Number
FR4	FP	3/4	3.7	1	4.8	SPXF07A1-2A1B1
		1	4.8	1-1/2	6.6	SPX001A1-2A1B1
		1-1/2	6.6	2	7.8	SPXF15A1-2A1B1
		2	7.8	3	11	SPX002A1-2A1B1
		3	11	—	12.5	SPX003A1-2A1B1
FR5	FP	—	12.5	5	17.5	SPX004A1-2A1B1
		5	17.5	7-1/2	25	SPX005A1-2A1B1
		7-1/2	25	10	31	SPX007A1-2A1B1
FR6	FP	10	31	15	48	SPX010A1-2A1B1
		15	48	20	61	SPX015A1-2A1B1
FR7	FP	20	61	25	75	SPX020A1-2A1N1
		25	75	30	88	SPX025A1-2A1N1
		30	88	40	114	SPX030A1-2A1N1
FR8	FP	40	114	50	140	SPX040A1-2A1N1
		50	140	60	170	SPX050A1-2A1N1
		60	170	75	205	SPX060A1-2A1N1
FR9	FP	75	205	100	261	SPX075A1-2A1N1
		100	261	—	—	SPX100A1-2A1N1

208–240V, NEMA Type 12/IP54 Drives

Frame Size	Delivery Code	hp (I _H)	Current (I _H)	hp (I _L)	Current (I _L)	Catalog Number
FR4	FP	3/4	3.7	1	4.8	SPXF07A2-2A1B1
		1	4.8	1-1/2	6.6	SPX001A2-2A1B1
		1-1/2	6.6	2	7.8	SPXF15A2-2A1B1
		2	7.8	3	11	SPX002A2-2A1B1
		3	11	—	12.5	SPX003A2-2A1B1
FR5	FP	—	12.5	5	17.5	SPX004A2-2A1B1
		5	17.5	7-1/2	25	SPX005A2-2A1B1
		7-1/2	25	10	31	SPX007A2-2A1B1
FR6	FP	10	31	15	48	SPX010A2-2A1B1
		15	48	20	61	SPX015A2-2A1B1
FR7	FP	20	61	25	75	SPX020A2-2A1N1
		25	75	30	88	SPX025A2-2A1N1
		30	88	40	114	SPX030A2-2A1N1
FR8	FP	40	114	50	140	SPX040A2-2A1N1
		50	140	60	170	SPX050A2-2A1N1
		60	170	75	205	SPX060A2-2A1N1
FR9	FP	75	205	100	261	SPX075A2-2A1N1
		100	261	—	—	SPX100A2-2A1N1

480V Drives

2

SPX9000 Open Drives



380–500V, NEMA Type 1/IP21 Drives

Frame Size	Delivery Code	hp (I _H)	Current (I _H)	hp (I _L)	Current (I _L)	Catalog Number
FR4	W	1	2.2	1-1/2	3.3	SPX001A1-4A1B1
	FP	1-1/2	3.3	2	4.3	SPXF15A1-4A1B1
	FP	2	4.3	3	5.6	SPX002A1-4A1B1
	W	3	5.6	5	7.6	SPX003A1-4A1B1
	W	5	7.6	—	9	SPX005A1-4A1B1
	FP	—	9	7-1/2	12	SPX006A1-4A1B1
FR5	W	7-1/2	12	10	16	SPX007A1-4A1B1
		10	16	15	23	SPX010A1-4A1B1
		15	23	20	31	SPX015A1-4A1B1
FR6	W	20	31	25	38	SPX020A1-4A1B1
		25	38	30	46	SPX025A1-4A1B1
		30	46	40	61	SPX030A1-4A1B1
FR7	FP	40	61	50	72	SPX040A1-4A1N1
	W	50	72	60	87	SPX050A1-4A1N1
	W	60	87	75	105	SPX060A1-4A1N1
FR8	FP	75	105	100	140	SPX075A1-4A1N1
	W	100	140	125	170	SPX100A1-4A1N1
	W	125	170	150	205	SPX125A1-4A1N1
FR9	W	150	205	200	261	SPX150A1-4A1N1
		200	245	250	300	SPX200A1-4A1N1

380–500V, NEMA Type 1/IP21 Freestanding Drives

Frame Size	Delivery Code	hp (I _H)	Current (I _H)	hp (I _L)	Current (I _L)	Catalog Number
FR10	W	250	330	300	385	SPX250A1-4A4N1
	FP	300	385	350	460	SPX300A1-4A4N1
	W	350	460	400	520	SPX350A1-4A4N1
FR11	FP	400	520	500	590	SPX400A1-4A4N1
	FP	500	590	550	650	SPX500A1-4A4N1
	FP	550	650	600	730	SPX550A1-4A4N1

Note

Integrated fuses as standard. Limited option selection available; 115V transformer (KB), light kit (L1), HOA (K4), speed potentiometer w/HOA (K2), Disconnect switch (P2). See Freestanding Option selection on **Page V6-T2-111**.

SPX9000 Open Drives



380–500V, NEMA Type 12/IP54 Drives

Frame Size	Delivery Code	hp (I _H)	Current (I _H)	hp (I _L)	Current (I _L)	Catalog Number
FR4	W	1	2.2	1-1/2	3.3	SPX001A2-4A1B1
	FP	1-1/2	3.3	2	4.3	SPXF15A2-4A1B1
	FP	2	4.3	3	5.6	SPX002A2-4A1B1
	W	3	5.6	5	7.6	SPX003A2-4A1B1
	W	5	7.6	—	9	SPX005A2-4A1B1
	FP	—	9	7-1/2	12	SPX006A2-4A1B1
FR5	W	7-1/2	12	10	16	SPX007A2-4A1B1
		10	16	15	23	SPX010A2-4A1B1
		15	23	20	31	SPX015A2-4A1B1
FR6	W	20	31	25	38	SPX020A2-4A1B1
		25	38	30	46	SPX025A2-4A1B1
		30	46	40	61	SPX030A2-4A1B1
FR7	FP	40	61	50	72	SPX040A2-4A1N1
		50	72	60	87	SPX050A2-4A1N1
		60	87	75	105	SPX060A2-4A1N1
FR8	FP	75	105	100	140	SPX075A2-4A2N1
		100	140	125	170	SPX100A2-4A1N1
		125	170	150	205	SPX125A2-4A1N1
FR9	FP	150	205	200	261	SPX150A2-4A1N1
		200	245	250	300	SPX200A2-4A1N1

380–500V, NEMA Type 12/IP54 Freestanding Drives

Frame Size	Delivery Code	hp (I _H)	Current (I _H)	hp (I _L)	Current (I _L)	Catalog Number
FR10	FP	250	330	300	385	SPX250A2-4A4N1
	FP	300	385	350	460	SPX300A2-4A4N1
	FP	350	460	400	520	SPX350A2-4A4N1

380–500V, Open Chassis Drives

Frame Size ^①	Delivery Code	hp (I _H)	Current (I _H)	hp (I _L)	Current (I _L)	Catalog Number
FR10	W	250	330	300	385	SPX250A0-4A2N1
		300	385	—	460	SPX300A0-4A2N1
		350	460	400	520	SPX350A0-4A2N1
FR11	FP	400	520	500	590	SPX400A0-4A2N1
		500	590	—	650	SPX500A0-4A2N1
		—	650	600	730	SPX550A0-4A2N1
FR12	FP	600	730	—	820	SPX600A0-4A2N1
		—	820	700	920	SPX650A0-4A2N1
		700	920	800	1030	SPX700A0-4A2N1
FR13	FP	800	1030	900	1150	SPX800A0-4A2N1
		900	1150	1000	1300	SPX900A0-4A2N1
		1000	1300	1200	1450	SPXH10A0-4A2N1
FR14	FP	1200	1600	1500	1770	SPXH12A0-4A2N1
		1600	1940	1800	2150	SPXH16A0-4A2N1

Notes

Integrated fuses as standard. Limited option selection available; 115V transformer (KB), light kit (L1), HOA (K4), speed potentiometer w/HOA (K2), disconnect switch (P2). See Freestanding Option selection on **Page V6-T2-111**.

① FR10–FR14 includes 3% line reactor, but it is not integral to chassis.

575V Drives

2

SPX9000 Open Drives



525–690V, NEMA Type 1/IP21 Drives

Frame Size	Delivery Code	hp (I _H)	Current (I _H)	hp (I _L)	Current (I _L)	Catalog Number
FR6	W	2	3.3	3	4.5	SPX002A1-5A4N1
		3	4.5	—	5.5	SPX003A1-5A4N1
		—	5.5	5	7.5	SPX004A1-5A4N1
		5	7.5	7-1/2	10	SPX005A1-5A4N1
		7-1/2	10	10	13.5	SPX007A1-5A4N1
		10	13.5	15	18	SPX010A1-5A4N1
		15	18	20	22	SPX015A1-5A4N1
		20	22	25	27	SPX020A1-5A4N1
		25	27	30	34	SPX025A1-5A4N1
FR7	W	30	34	40	41	SPX030A1-5A4N1
		40	41	50	52	SPX040A1-5A4N1
FR8	W	50	52	60	62	SPX050A1-5A4N1
		60	62	75	80	SPX060A1-5A4N1
		75	80	100	100	SPX075A1-5A4N1
FR9	W	100	100	125	125	SPX100A1-5A4N1
		125	125	150	144	SPX125A1-5A4N1
		150	144	—	170	SPX150A1-5A4N1
		—	170	200	208	SPX175A1-5A4N1

525–690V, NEMA Type 1/IP21 Freestanding Drives

Frame Size	Delivery Code	hp (I _H)	Current (I _H)	hp (I _L)	Current (I _L)	Catalog Number
FR10	FP	200	208	250	261	SPX200A1-5A4N1
		250	261	300	325	SPX250A1-5A4N1
		300	325	400	385	SPX300A1-5A4N1
FR11	FP	400	385	450	460	SPX400A1-5A4N1
		450	460	500	502	SPX450A1-5A4N1
		500	502	550	590	SPX500A1-5A4N1

Note

Integrated fuses as standard. Limited option selection available; 115V transformer (KB), light kit (L1), HOA (K4), speed potentiometer w/HOA (K2), disconnect switch (P2). See Freestanding Option selection on **Page V6-T2-111**.

SPX9000 Open Drives



525–690V, NEMA Type 12/IP54 Drives

Frame Size	Delivery Code	hp (I _H)	Current (I _H)	hp (I _L)	Current (I _L)	Catalog Number
FR6	F1	2	3.3	3	4.5	SPX002A2-5A4N1
		3	4.5	—	5.5	SPX003A2-5A4N1
		—	5.5	5	7.5	SPX004A2-5A4N1
		5	7.5	7-1/2	10	SPX005A2-5A4N1
		7-1/2	10	10	13.5	SPX007A2-5A4N1
		10	13.5	15	18	SPX010A2-5A4N1
		15	18	20	22	SPX015A2-5A4N1
		20	22	25	27	SPX020A2-5A4N1
FR7	FP	25	27	30	34	SPX025A2-5A4N1
		30	34	40	41	SPX030A2-5A4N1
FR8	FP	40	41	50	52	SPX040A2-5A4N1
		50	52	60	62	SPX050A2-5A4N1
FR9	FP	60	62	75	80	SPX060A2-5A4N1
		75	80	100	100	SPX075A2-5A4N1
FR9	FP	100	100	125	125	SPX100A2-5A4N1
		125	125	150	144	SPX125A2-5A4N1
		150	144	—	170	SPX150A2-5A4N1
		—	170	200	208	SPX175A2-5A4N1

525–690V, NEMA Type 12/IP54 Freestanding Drives

Frame Size	Delivery Code	hp (I _H)	Current (I _H)	hp (I _L)	Current (I _L)	Catalog Number
FR10	FP	200	208	250	261	SPX200A2-5A4N1
		250	261	300	325	SPX250A2-5A4N1
		300	325	400	385	SPX300A2-5A4N1

525–690V, Open Chassis Drives

Frame Size ^①	Delivery Code	hp (I _H)	Current (I _H)	hp (I _L)	Current (I _L)	Catalog Number
FR10	FP	200	208	250	261	SPX200A0-5A2N1
		250	261	300	325	SPX250A0-5A2N1
		300	325	400	385	SPX300A0-5A2N1
FR11	FP	400	385	450	460	SPX400A0-5A2N1
		450	460	500	502	SPX450A0-5A2N1
		500	502	—	590	SPX500A0-5A2N1
FR12	FP	—	590	600	650	SPX550A0-5A2N1
		600	650	700	750	SPX600A0-5A2N1
		700	750	800	820	SPX700A0-5A2N1
FR13	FP	800	820	900	920	SPX800A0-5A2N1
		900	920	1000	1030	SPX900A0-5A2N1
		1000	1030	1250	1180	SPXH10A0-5A2N1
FR14	FP	1350	1300	1500	1500	SPXH13A0-5A2N1
		1500	1500	2000	1900	SPXH15A0-5A2N1
		2000	1900	2300	2250	SPXH20A0-5A2N1

Notes

Integrated fuses as standard. Limited option selection available; 115V transformer (KB), light kit (L1), HOA (K4), speed potentiometer w/HOA (K2), disconnect switch (P2). See Freestanding Option selection on **Page V6-T2-111**.

① FR10–FR14 includes 3% line reactor, but it is not integral to chassis.

Accessories

2

Demo Drive and Power Supply

Demo Drive and Power Supply

Description	Catalog Number
9000X demo drive	9000XDEMO
Hand-held 24V auxiliary power supply—Used to supply power to the control module in order to perform keypad programming before the drive is connected to line voltage	9000XAUX24V

NEMA Type 12/IP54 Conversion Kit

The NEMA Type 12/IP54 kit option is used to convert a NEMA Type 1/IP21 to a NEMA Type 12/IP54 drive. The NEMA Type 12/IP54

kit consists of a metal drive shroud, fan kit for some frames, adaptor plate and plugs.

NEMA Type 12/IP54 Conversion Kit

Frame Size	Delivery Code	Approximate Dimensions in Inches (mm)			Approximate Weight Lb (kg)	Catalog Number
		Length	Width	Height		
FR4	W	13 (330)	7 (178)	4 (102)	4 (1.8)	OPTN12FR4
FR5		16 (406)	8 (203)	7 (178)	5 (2.3)	OPTN12FR5
FR6		21 (533)	10 (254)	5 (127)	7 (3.2)	OPTN12FR6

Flange Kits

Flange Kit NEMA Type 12/IP54

The flange kit is utilized when the power section is mounted through the back panel of an enclosure. Includes flange mount brackets and NEMA Type 12/IP54 fan components. Metal shroud not included.

Flange kits for NEMA Type 12/IP54 enclosure drive rating are determined by rating of drive.

Flange Kit NEMA Type 12/IP54— Frames 4, 5 and 6 ^①

Frame Size	Delivery Code	Catalog Number
FR4	W	OPTTHRFR4
FR5		OPTTHRFR5
FR6		OPTTHRFR6

Flange Kit NEMA Type 12/IP54— Frames 4–9 ^①

Frame Size	Delivery Code	Catalog Number
FR4	FP	OPTTHR4
FR5		OPTTHR5
FR6		OPTTHR6
FR7		OPTTHR7
FR8		OPTTHR8
FR9		OPTTHR9

Flange Kit NEMA Type 1/IP21

Flange kits for NEMA Type 1/IP21 enclosure drive rating are determined by rating of drive.

Flange Kit NEMA Type 1/IP21— Frames 4–9 ^①

Frame Size	Delivery Code	Catalog Number
FR4	FP	OPTTHR4
FR5		OPTTHR5
FR6		OPTTHR6
FR7		OPTTHR7
FR8		OPTTHR8
FR9		OPTTHR9

Note

^① For installation of an SPX9000 NEMA Type 1/IP21 drive into a NEMA Type 12/IP54 oversized enclosure.


Options

9000X Series Option Board Kits

The 9000X Series drives can accommodate a wide selection of expander and adapter option boards to customize the drive for your application needs. The drive's control unit is designed to accept a total of five option boards.

The 9000X Series factory installed standard board configuration includes an A9 I/O board and an A2 relay output board, which are installed in slots A and B.

Option Boards



Option Board Kits

Option Kit Description ①	Allowed Slot Locations ②	Field Installed	Factory Installed	SVX Ready Programs						
		Catalog Number	Option Designator	Basic	Local/Remote	Standard	MSS	PID	Multi-P.	PFC
Standard I/O Cards										
2 RO (NC-NO)	B	OPTA2	—	■	■	■	■	■	■	■
6 DI, 1 DO, 2 AI, 1AO, 1 +10 Vdc ref, 2 ext +24 Vdc/EXT +24 Vdc	A	OPTA9	—	■	■	■	■	■	■	■
Extended I/O Cards										
2 RO, therm	B	OPTA3	A3	—	■	■	■	■	■	■
Encoder low volt +5V/15V/24V	C	OPTA4	A4	—	■	■	■	■	■	■
Encoder high volt +15V/24V	C	OPTA5	A5	—	■	■	■	■	■	■
Double encoder—SPX only	C	OPTA7	A7	■	■	■	■	■	■	■
6 DI, 1 DO, 2 AI, 1 AO	A	OPTA8	A8	—	■	■	■	■	■	■
6 DI, 1 DO, 2 AI, 1AO, 1 +10 Vdc ref, 2 ext +24 Vdc/EXT +24 Vdc	A	OPTA1	—	■	■	■	■	■	■	■
3 DI (encoder 10–24V), out +15V/+24V, 2 DO (pulse+direction)—SPX only	C	OPTAE	AE	■	■	■	■	■	■	■
6 DI, 1 DO, 2 AI, 1AO, 1 +10 Vdc ref, 2 ext +24 Vdc/EXT +24 Vdc	A	OPTAFA1	—	■	■	■	■	■	■	■
6 DI, 1 ext +24 Vdc/EXT +24 Vdc	B, C, D, E	OPTB1	B1	—	—	—	—	—	■	■
1 RO (NC-NO), 1 RO (NO), 1 therm	B, C, D, E	OPTB2	B2	—	—	—	—	—	■	■
1 AI (mA isolated), 2 AO (mA isolated), 1 ext +24 Vdc/EXT +24 Vdc	B, C, D, E	OPTB4	B4	—	■	■	■	■	■	■
3 RO (NO)	B, C, D, E	OPTB5	B5	—	—	—	—	—	■	■
1 ext +24 Vdc/EXT +24 Vdc, 3 Pt100	B, C, D, E	OPTB8	B8	—	—	—	—	—	—	—
1 RO (NO), 5 DI 42–240 Vac input	B, C, D, E	OPTB9	B9	—	—	—	—	—	■	■
SPI, absolute encoder	C	OPTBB	BB	—	—	—	—	—	—	—

Notes


① AI = Analog Input; AO = Analog Output, DI = Digital Input, DO = Digital Output, RO = Relay Output

② Option card must be installed in one of the slots listed for that card. Slot indicated in bold is the preferred location.

Option Boards

Option Board Kits, continued

2



Option Kit Description ①	Allowed Slot Locations ②	Field Installed	Factory Installed	SVX Ready Programs						
		Catalog Number	Option Designator	Basic	Local/Remote	Standard	MSS	PID	Multi-P.	PFC
Communication Cards ③										
Modbus	D, E	OPTC2	C2	■	■	■	■	■	■	■
Johnson Controls N2	D, E	OPTC2	CA	—	—	—	—	—	—	—
Modbus TCP	D, E	OPTCI	CI	■	■	■	■	■	■	■
BACnet	D, E	OPTCJ	CJ	■	■	■	■	■	■	■
Ethernet IP	D, E	OPTCK	CK	■	■	■	■	■	■	■
Profibus DP	D, E	OPTC3	C3	■	■	■	■	■	■	■
LonWorks	D, E	OPTC4	C4	■	■	■	■	■	■	■
Profibus DP (D9 connector)	D, E	OPTC5	C5	■	■	■	■	■	■	■
CanOpen (slave)	D, E	OPTC6	C6	■	■	■	■	■	■	■
DeviceNet	D, E	OPTC7	C7	■	■	■	■	■	■	■
Modbus (D9 type connector)	D, E	OPTC8	C8	■	■	■	■	■	■	■
Adapter—SPX only	D, E	OPTD1	D1	■	■	■	■	■	■	■
Adapter—SPX only	D, E	OPTD2	D2	■	■	■	■	■	■	■
RS-232 with D9 connection	D, E	OPTD3	D3	■	■	■	■	■	■	■
Keypad										
9000X Series local/remote keypad (replacement keypad)	—	KEYPAD-LOC/REM	—	—	—	—	—	—	—	■
9000X Series remote mount keypad unit (keypad not included, includes 10 ft cable, keypad holder, mounting hardware)	—	OPTRMT-KIT-9000X	—	—	—	—	—	—	—	—
9000X Series RS-232 cable, 13 ft	—	PP00104	—	—	—	—	—	—	—	—

Notes

① AI = Analog Input; AO = Analog Output; DI = Digital Input, DO = Digital Output, RO = Relay Output

② Option card must be installed in one of the slots listed for that card. Slot indicated in bold is the preferred location.

③ OPTC2 is a multi-protocol option card.

Modbus RTU Network Communications

The Modbus Network Card OPTC2 is used for connecting the 9000X Drive as a slave on a Modbus network. The interface is connected by a 9-pin DSUB connector (female) and the baud rate ranges from 300 to 19200 baud. Other communication parameters include an address range from 1 to 247; a parity of None, Odd or Even; and the stop bit is 1.

PROFIBUS Network Communications

The PROFIBUS Network Card OPTC3 is used for connecting the 9000X Drive as a slave on a PROFIBUS-DP network. The interface is connected by a 9-pin DSUB connector (female). The baud rates range from 9.6K baud to 12M baud, and the addresses range from 1 to 127.

LonWorks Network Communications

The LonWorks Network Card OPTC4 is used for connecting the 9000X Drive on a LonWorks network. This interface uses Standard Network Variable Types (SNVT) as data types. The channel connection is achieved using a FTT-10A Free Topology transceiver via a single twisted transfer cable. The communication speed with LonWorks is 78 kBits/s.

CANopen (Slave) Communications

The CANopen (Slave) Network Card OPTC6 is used for connecting the 9000X Drive to a host system. According to ISO11898 standard cables to be chosen for CAN bus should have a nominal impedance of 120 ohms, and specific line delay of nominal 5 nS/m. 120 ohms line termination resistors required for installation.

DeviceNet Network Communications

The DeviceNet Network Card OPTC7 is used for connecting the 9000X Drive on a DeviceNet Network. It includes a 5.08 mm pluggable connector. Transfer method is via CAN using a two-wire twisted shielded cable with two-wire bus power cable and drain. The baud rates used for communication include 125K baud, 250K baud and 500K baud.

Johnson Controls Metasys N2 Network Communications

The OPTC2 fieldbus board provides communication between the 9000X Drive and a Johnson Controls Metasys™ N2 network. With this connection, the drive can be controlled, monitored and programmed from the Metasys system. The N2 fieldbus is available as a factory installed option and as a field installable kit.

Modbus/TCP Network Communications

The Modbus/TCP Network Card OPTCI is used for connecting the 9000X Drive to Ethernet networks utilizing Modbus protocol. It includes an RJ-45 pluggable connector. This interface provides a selection of standard and custom register values to communicate drive parameters. The board supports 10 Mbps and 100 Mbps communication speeds. The IP address of the board is configurable over Ethernet using a supplied software tool.

BACnet Network Communications

The BACnet Network Card OPTCJ is used for connecting the 9000X Drive to BACnet networks. It includes a 5.08 mm pluggable connector. Data transfer is Master-Slave/Token Passing (MS/TP) RS-485. This interface uses a collection of 30 Binary Value Objects (BVOs) and 35 Analog Value Objects (AVOs) to communicate drive parameters. The card supports 9.6, 19.2 and 38.4 Kbaud communication speeds and supports network addresses 1–127.

Ethernet/IP Network Communications

The Ethernet/IP Network Card OPTCK is used for connecting the 9000X Drive to Ethernet/Industrial Protocol networks. It includes an RJ-45 pluggable connector. The interface uses CIP objects to communicate drive parameters (CIP is “Common Industrial Protocol”, the same protocol used by DeviceNet). The board supports 10 Mbps and 100 Mbps communication speeds. The IP address of the board is configurable by Static, BOOTP and DHCP methods.

Control Panel Options

Factory Options

2

Description	Factory Installed Option Code	Field Installed NEMA Type 1/IP21 Catalog Number
Local/Remote Keypad SVX9000 Control Panel —This option is standard on all drives and consists of an RS-232 connection, backlit alphanumeric LCD display with nine indicators for the RUN status and two indicators for the control source. The nine pushbuttons on the panel are used for panel programming and monitoring of all SVX9000 parameters. The panel is detachable and isolated from the input line potential. Include LOC/REM key to choose control location.	A	KEYPAD-LOC/REM
Keypad Remote Mounting Kit —This option is used to remote mount the SVX9000 keypad. The footprint is compatible to the SV9000 remote mount kit. Includes 10 ft cable, keypad holder and mounting hardware.	—	OPTRMT-KIT-9000X
Keypad Blank —9000X Series select keypad for use with special and custom applications.	—	KEYPAD-BLANK

Miscellaneous Options

Description	Catalog Number
9000XDrive —A PC-based tool for controlling and monitoring of the SVX9000. Features include: loading parameters that can be saved to a file or printed, setting references, starting and stopping the motor, monitoring signals in graphical or text form, and real-time display. To avoid damage to the drive or computer, SVDriveable must be used.	9000XDRIVE
SVDriveable —6 ft (1.8m) RS-232 cable (22 gauge) with a 7-pin connector on each end. Should be used in conjunction with the 9000XDrive option to avoid damage to the SVX9000 or computer. The same cable can be used for downloading specialized applications to the drive.	SVDIVECABLE
External Dynamic Braking Resistors —Used with the dynamic braking chopper circuit to absorb motor regenerative energy for stopping the load and to dissipate the energy flowing back into the drive. Resistors are separated into standard duty and heavy-duty. Standard duty is defined as 20% duty or less with 100% braking torque, while heavy-duty is defined as 50% duty or less with 150% braking torque.	①

SPX9000 Drive Options

Brake Chopper Options

The brake chopper circuit option is used for applications that require dynamic braking. Dynamic braking resistors are not included with drive

purchase. Consult the factory for dynamic braking resistors which are supplied separately. Resistors are not UL Listed.

For brake chopper circuit selection and adder—NEMA Type 1/IP21, NEMA Type 12/IP54, Chassis, consult the factory. Delivery code is FP.

Conformal (Varnished) Coating ②

Chassis Frame	Delivery Code
FR4	FP
FR5	FP
FR6	FP
FR7	FP
FR8	FP
FR9	FP
FR10	FP
FR11	FP
FR12	FP
FR13	FP
FR14	FP

Conformal Coated Board Kits ③

Field Installed Catalog Number	Factory Installed Option Designator
OPT_V ④	⑤

Notes

- ① Consult factory.
 ② See Product Selection on **Pages V6-T2-101 to V6-T2-105**, 208–240V, 380–500V, 525–690V. Consult the factory for adder
 ③ See option catalog numbers on **Page V6-T2-107**.
 ④ Replace “_” with the correct catalog number from **Page V6-T2-107**. Example: OPTC2V.
 ⑤ Construct catalog numbers for factory installed per Catalog Number Selection on **Page V6-T2-100**.

Control/Communication Options**Available Control/Communications Options**

Option	Description	Option Type
K2	Door-Mounted Speed Potentiometer with HOA Selector Switch —Provides the SPX9000 with the ability to start/stop and adjust the speed reference from door-mounted control devices or remotely from customer supplied inputs. In HAND position, the drive will start and the speed is controlled by the door-mounted speed potentiometer. The drive will be disabled in the OFF position. When AUTO is selected, the drive run and speed control commands are via user-supplied dry contact and 4–20 mA signal.	Control
K4	HAND/OFF/AUTO Switch for Non-Bypass Configurations —Provides a three-position selector switch that allows the user to select either a HAND or AUTO mode of operation. HAND mode is defaulted to keypad operation, and AUTO mode is defaulted to control from an external terminal source. These modes of operation can be configured via programming to allow for alternate combinations of start and speed sources. Start and speed sources include keypad, I/O and fieldbus.	Control
KB	115V Control Transformer, 550 VA —Provides a fused control power transformer with additional 550 VA at 115V for customer use.	Control
L1	Power On and Fault Pilot Lights —Provide a white power on light that indicates power to the enclosed cabinet and a red fault light that indicates a drive fault has occurred.	Light
P2	Disconnect Switch —Disconnect switch option is applicable only with NEMA Type 1/IP21 and NEMA Type 12/IP54 Freestanding drives. Allows a convenient means of disconnecting the SPX9000 from the line, and the operating mechanism can be padlocked in the OFF position. This is factory-mounted in the enclosure.	Input

SPX Freestanding Options**480V and 690V Control Options, 200–550 hp** ^①

Description	Catalog Number Suffix
Door-mounted speed potentiometer with HOA selector switch	K2
HAND/OFF/AUTO switch (22 mm)	K4
115 volt control transformer 550 VA	KB

480V and 690V Light Options, 200–550 hp ^①

Description	Catalog Number Suffix
Power on/fault pilot lights	L1

Input Options, 200–550 hp ^①

Description	Catalog Number Suffix
Disconnect switch	P2 ^②

Notes

^① Consult factory for adder information.

^② Applicable with FR10 and FR11 freestanding designs only.

Replacement Parts

2

SPX9000 Drives Spare Units

208–690V, Frames 4–12

Description

Catalog Number

Control unit—Includes the control board, blue base housing, installed SVX9000 software program and blue flip cover. Does not include any OPT boards or keypad. See **Page V6-T2-107** for standard and option boards and keypad.

CSBS0000000000

SPX9000 Drives Replacement Parts

208–240V, Frames FR4–FR8

Frame	4				5				6			7		8				Delivery Code	Catalog Number
hp (I _H):	3/4	1	1-1/2	2	3	5 ①	5	7-1/2	10	15	20	25	30	40	50	60			
Control Board																			
1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	W	VB00561	
Power Boards																			
1																	FB	VB00308-0004-2	
	1																FB	VB00308-0007-2	
		1															FB	VB00308-0008-2	
			1														FB	VB00310-0011-2	
				1													FB	VB00310-0012-2	
					1												FB	VB00313-0017-2	
						1											FB	VB00313-0025-2	
							1										FB	VB00313-0031-2	
								1									FB	VB00316-0048-2	
									1								FB	VB00316-0061-2	
										1							FB	VB00319-0075-2	
											1						FB	VB00319-0088-2	
												1					FB	VB00319-0114-2	
													1				FB	VB00322-0140-2	
														1			FB	VB00322-0170-2	
															1		FB	VB00322-0205-2	
Electrolytic Capacitors																			
2	2	2															W	PP01000	
			2		2												W	PP01001	
					2	2											W	PP01002	
							2										W	PP01003	
								2	2								W	PP01004	
										2	2	2	4	4			W	PP01005	
															4		W	PP01099	

Note

① I_L only; has no corresponding I_H rated hp rating.

208–240V, Frames FR4–FR8, continued

Frame hp (I _H):	4	3/4	1	1-1/2	2	3	5 ①	5	7-1/2	10	15	20	25	30	40	50	60	Delivery Code	Catalog Number
Cooling Fans																			
	1	1	1	1	1													W	PP01060
						1	1	1										W	PP01061
										1	1							W	PP01062
												1	1	1				W	PP01063
	1	1	1	1	1										1	1	1	FC	PP01123 ②
						1	1	1		1	1							W	PP01086
												1	1	1				FC	PP01088
												1	1	1				W	PP01049
															1	2	2	FC	CP01180
															1	1	1	FC	PP08037
IGBT Modules																			
	1	1																W	CP01304
			1															W	CP01305
				1	1	1												W	CP01306
							1											W	CP01307
								1										W	CP01308
									1									W	PP01022
										1								W	PP01023
											1							W	PP01024
												1						W	PP01025
													1					W	PP01029
														1				W	PP01026
															1	1		W	PP01027
Choppers/Rectifiers																			
										1								W	CP01367
											1							W	CP01368
Diode/Thyristor Modules																			
											3	3	3					W	PP01035
															3	3	3	W	CP01268
Rectifying Boards																			
											1	1	1					W	VB00242
															1	1	1	W	VB00227

Note

② PP00061 capacitor not included in main fan; please order separately.

2.4

Adjustable Frequency Drives

SPX9000 Drives

380–500V, Frames FR4–FR9

2

Frame hp (I _H):	4				5				6				7				8				9				Delivery Code	Catalog Number
	1	1-1/2	2	3	5	7-1/2 ①	7-1/2	10	15	20	25	30	40	50	60	75	100	125	150	200						
Control Board																										
	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	W	VB00252			
Power Boards																										
1																						FB	VB00208-0003-5			
	1																					FB	VB00208-0004-5			
		1																				FB	VB00208-0005-5			
			1																			FB	VB00208-0007-5			
				1																		FB	VB00208-0009-5			
					1																	FB	VB00210-0012-5			
						1																FB	VB00213-0016-5			
							1															FB	VB00213-0022-5			
								1														FB	VB00213-0031-5			
									1													FB	VB00216-0038-5			
										1												FB	VB00216-0045-5			
											1											FB	VB00216-0061-5			
												1										FB	VB00219-0072-5			
													1									FB	VB00219-0087-5			
														1								FB	VB00219-0105-5			
															1							FB	VB00236-0140-5			
																1						FB	VB00236-0168-5			
																	1					FB	VB00236-0205-5			
Electrolytic Capacitors																										
2	2	2	2																			W	PP01000			
				2	2																	W	PP01001			
						2	2															W	PP01002			
								2														W	PP01003			
									2	2	2											W	PP01004			
												2	2	2	4	4	4	8	8			W	PP01005			
Cooling Fans																										
1	1	1	1	1	1																	W	PP01060			
						1	1	1														W	PP01061			
									1	1	1											W	PP01062			
												1	1	1								W	PP01063			
															1	1	1					FC	PP01123 ②			
																	1	1				FC	PP01080 ③			
1	1	1	1	1	1																	W	PP01086			
						1	1	1														FC	PP01088			
									1	1	1	1	1	1								W	PP01049			
															1	1	1					FC	CP01180			
																		1 ④	2			W	PP01068			
																			1	1		FC	PP09051			

Notes

- ① I_L only; has no corresponding I_H rated hp rating.
- ② PP00061 capacitor not included in main fan; please order separately.
- ③ PP00011 capacitor not included in main fan; please order separately.
- ④ For FR9 NEMA Type 12/IP54 you need two PP01068 internal fans.

380–500V, Frames FR4–FR9, continued

Frame	4				5				6				7				8				9				Delivery Code	Catalog Number
hp (I _H):	1	1-1/2	2	3	5	7-1/2 ①	7-1/2	10	15	20	25	30	40	50	60	75	100	125	150	200						
IGBT Modules																										
	1	1	1																			W	CP01304			
				1	1																	W	CP01305			
						1	1															W	CP01306			
								1														W	CP01307			
									1													W	CP01308			
										1	1											W	PP01022			
												1										W	PP01023			
													1									W	PP01024			
														1								W	PP01025			
															1							W	PP01029			
																1						W	PP01026			
																	1	1				W	PP01027			
Chopper/Rectifiers																										
										1	1											W	CP01367			
												1										W	CP01368			
Diode/Thyristor Modules																										
													3	3	3							W	PP01035			
																3	3	3				W	CP01268			
																			3	3		W	PP01037			
Rectifying Boards																										
													1	1	1							W	VB00242			
																1	1	1				W	VB00227			
																			1	1		W	VB00459			
Rectifying Module Sub-assembly																										
																			1	1		W	FR09810			
Power Module Sub-assemblies																										
																			1			W	FR09-150-4-ANS ②			
																				1		W	FR09-200-4-ANS ②			

Notes

① I_L only; has no corresponding I_H rated hp rating.

② See **Page V6-T2-100** for details.

2.4

Adjustable Frequency Drives

SPX9000 Drives

380–500V, Frames FR10–FR12

2

Frame hp (1 _h):	10 250	300	350	11 400	500	550	12 600	650	700	Delivery Code	Catalog Number
Control Board											
1	1		1	1	1	1	1	1	1	W	VB00561
Shunt Boards											
6										FC	VB00537
	6									FC	VB00497
			6				12	12	12	FC	VB00498
				9						FC	VB00538
					9					FC	VB00513
						9				FC	VB00514
Driver Boards											
				3	3	3				FC	VB00489
1	1	1					2	2	2	FC	VB00487
Driver Adapter Board											
1	1	1					2	2	2	FC	VB00330
ASIC Board											
1	1	1	1	1	1	1	2	2	2	FC	VB00451
Feedback Interface Board											
							2	2	2	FC	VB00448
Star Coupler Board											
							1	1	1	FC	VB00336
Power Modules											
1	1	1	2	2	2	2	2	2	2	FC	FR10820 ^①
2	2	2								FC	FR10828
1										FC	FR10-250-4-ANS ^②
	1									FC	FR10-300-4-ANS ^②
		1					2	2	2	FC	FR10-350-4-ANS ^②
			3							FC	FR11-400-4-ANS ^②
				3						FC	FR11-500-4-ANS ^②
					3					FC	FR11-550-4-ANS ^②
Electrolytic Capacitors											
2	2	2	3	3	3	3	4	4	4	FC	PP00060
12	12	12	18	18	18	18	24	24	24	FC	PP01005
Fuses											
1	1	1	1	1	1	1	2	2	2	FC	PP01094
2	2	2	2	2	2	2	4	4	4	FC	PP01095
Cooling Fans and Isolation Transformers											
2	2	2	3	3	3	3	4	4	4	FC	VB00299
2	2	2	3	3	3	3	4	4	4	FC	PP01080 ^③
2	2	2					4	4	4	FC	PP01068
1	1	1	1	1	1	1	2	2	2	FC	PP01096
1	1	1					2	2	2	FC	FR10844
1	1	1	3	3	3	3	2	2	2	FC	FR10845
1	1	1					2	2	2	FC	FR10846
1	1	1	3	3	3	3	2	2	2	FC	FR10847
Rectifying Board											
1	1	1	2	2	2	2	2	2	2	FC	VB00459

Notes

- ^① Rectifying board not included.
- ^② See **Page V6-T2-100** for details.
- ^③ PP00060 capacitor not included in main fan; please order separately.

525–690V, Frames FR6–FR9

Frame hp (I _H):	6 2	3	5 ①	5	7-1/2	10	15	20	25	7 30	40	8 50	60	9 75	100	125	150	200 ①	Delivery Code	Catalog Number
Control Board																				
	1	1	1	1	1	1	1	1	1	1	1					1	1	1	W	VB00561
Driver Boards																				
	1																		FB	VB00404-0004-6
		1																	FB	VB00404-0005-6
			1																FB	VB00404-0007-6
				1															FB	VB00404-0010-6
					1														FB	VB00404-0013-6
						1													FB	VB00404-0018-6
							1												FB	VB00404-0022-6
								1											FB	VB00404-0027-6
									1										FB	VB00404-0034-6
Power Boards																				
	1	1	1	1	1	1	1	1	1										FB	VB00414
										1									FB	VB00419-0041-6
											1								FB	VB00419-0052-6
												1							FB	VB00422-0062-6
													1						FB	VB00422-0080-6
														1					FB	VB00422-0100-6
Power Modules																				
															1				FC	FR09-100-5-ANS ②
																1			FC	FR09-125-5-ANS ②
																	1		FC	FR09-150-5-ANS ②
																		1	FC	FR09-175-5-ANS ②
Electrolytic Capacitors																				
	2	2	2	2	2	2	2	2	2										FC	PP01093
										2	2	4	4		8	8	8	8	FC	PP01041
													4						FC	PP01040
Fuses																				
											1	1	1	1	1	1	1	1	W	PP01094
											2	2	2	2	2	2	2	2	W	PP01095

Notes① I_L only; has no corresponding I_H rated hp rating.② See **Page V6-T2-100** for details.

2.4

Adjustable Frequency Drives

SPX9000 Drives

525–690V, Frames FR6–FR9, continued

2

Frame hp (I _H):	6 2	3	5 ①	5	7-1/2	10	15	20	25	7 30	40	8 50	60	9 75	100	125	150	200 ①	Delivery Code	Catalog Number
Cooling Fans																				
	1	1	1	1	1														W	PP01061
						1	1	1	1										W	PP01062
										1	1								W	PP01063
												1	1	1					FC	PP01123
	1	1	1	1	1	1	1	1	1	1	1								W	PP01049
												1	1	1					FC	CP01180
															1	1	1	1 ②	W	PP01068
															1	1	1	1	FC	PP01080
Fan Power Supply																				
																1	1	1	FC	VB00299
IGBT Modules																				
	3	3	3	3	3	3	3	3	3										FC	PP01091
										1	1								FC	PP01089
												1	1	1					FC	PP01127
IGBT/Diode (Brake)																				
	1	1	1	1	1	1	1	1	1	1	2	2	2	2	2	2	2	2	FC	PP01040
Diode Module																				
	1	1	1	1	1	1	1	1	1										FC	PP01092
Diode/Thyristor Modules																				
										3	3								FC	PP01071
															3	3	3	3	FC	PP01072
Rectifying Boards																				
										1	1								FC	VB00442
															1	1	1	1	FC	VB00460
Rectifying Module Sub-Assemblies																				
																1	1	1	W	FR09810
																1	1	1	FC	FR09811

Notes

- ① I_L only; has no corresponding I_H rated hp rating.
 ② For NEMA Type 12/IP54, two PP01068 internal fans are needed.

525–690V, Frames FR10–FR12

Frame hp (I _H):	10 250	300	350	11 400	500	550	12 600	650	700	Delivery Code	Catalog Number
Component Boards											
1	1		1	1	1	1	1	1	1	W	VB00561
1	1		1	1	1	1	2	2	2	FC	VB00451
6										FC	VB00545
	6									FC	VB00510
			6				12	12	12	FC	VB00511
1	1		1				2	2	2	FC	VB00330
1	1		1				2	2	2	FC	VB00487
				3	3	3				FC	VB00489
				9						FC	VB00546
					9					FC	VB00547
						9				FC	VB00512
							2	2	2	FC	VB00448
							1	1	1	FC	VB00336
Power Modules											
1	1		1	2	2	2	2	2	2	FC	FR10821 ①
2	2		2							FC	FR10829
1										FC	FR10-200-5-ANS ②
	1									FC	FR10-250-5-ANS ②
			1				2	2	2	FC	FR10-300-5-ANS ②
				3						FC	FR11-400-5-ANS ②
					3					FC	FR11-450-5-ANS ②
						3				FC	FR11-500-5-ANS ②
Electrolytic Capacitors											
2	2		2	3	3	3	4	4	4	FC	PP00060
12	12		12	18	18	18	24	24	24	FC	PP01099
Fuses											
1	1		1	1	1	1	2	2	2	FC	PP01094
2	2		2	2	2	2	4	4	4	FC	PP01095
Cooling Fans and Isolation Transformers											
2	2		2	3	3	3	4	4	4	FC	VB00299
2	2		2	3	3	3	4	4	4	FC	PP01080 ③
2	2		2				4	4	4	FC	PP01068
1	1		1	1	1	1	2	2	2	FC	PP01096
1	1		1				2	2	2	FC	FR10844
1	1		1	3	3	3	2	2	2	FC	FR10845
1	1		1				2	2	2	FC	FR10846
1	1		1	3	3	3	2	2	2	FC	FR10847
Fan Power Supply											
							1	1	1	FC	VB00299
Rectifying Boards											
1	1		1	2	2	2	2	2	2	FC	VB00460

Notes

① Rectifying board not included.

② See **Page V6-T2-100** for details.

③ PP00060 capacitor not included in main fan; please order separately.

Technical Data and Specifications

SPX9000 Drives

2

Description	Specification
Input Ratings	
Input voltage (V_{in})	+10%/-15%
Input frequency (f_{in})	50/60 Hz (variation up to 45–66 Hz)
Connection to power	Once per minute or less (typical operation)
High withstand rating	100 kAIC
Output Ratings	
Output voltage	0 to V_{in}
Continuous output current	I_H rated 100% at 122°F (50°C), FR9 and below I_L rated 100% at 104°F (40°C), FR9 and below I_H/I_L 100% at 104°F (40°C), FR10 and above
Overload current (I_H/I_L)	150% I_H , 110% I_L for 1 min.
Output frequency	0 to 320 Hz
Frequency resolution	0.01 Hz
Initial output current (I_H)	250% for 2 seconds
Control Characteristics	
Control method	Frequency control (V/f) Open loop: sensorless vector control Closed loop: frequency control Closed loop: vector control
Switching frequency	Adjustable with parameter 2.6.9
Frame 4–6	1 to 16 kHz; default 10 kHz
Frame 7–12	1 to 10 kHz; default 3.6 kHz
Frequency reference	Analog input: Resolution 0.1% (10-bit), accuracy $\pm 1\%$ V/Hz Panel reference: Resolution 0.01 Hz
Field weakening point	30 to 320 Hz
Acceleration time	0 to 3000 sec.
Deceleration time	0 to 3000 sec.
Braking torque	DC brake: 30% $\times T_n$ (without brake option)
Ambient Conditions	
Ambient operating temperature	14°F (–10°C), no frost to 122°F (50°C) I_H (FR4–FR9) 14°F (–10°C), no frost to 104°F (40°C) I_L (FR10 and up) 14°F (–10°C), no frost to 104°F (40°C) I_L (all frames)
Storage temperature	–40° to 158°F (–40° to 70°C)
Relative humidity	0 to 95% RH, noncondensing, non-corrosive, no dripping water
Air quality	Chemical vapors: IEC 721-3-3, unit in operation, class 3C2; Mechanical particles: IEC 721-3-3, unit in operation, class 3S2
Altitude	100% load capacity (no derating) up to 3280 ft (1000m); 1% derating for each 328 ft (100m) above 3280 ft (1000m); max. 9842 ft (3000m)
Vibration	EN 50178, EN 60068-2-6; 5 to 50 Hz, displacement amplitude 1 mm (peak) at 3 to 15.8 Hz, max. acceleration amplitude 1G at 15.8 to 150 Hz
Shock	EN 50178, EN 60068-2-27 UPS Drop test (for applicable UPS weights) Storage and shipping: max. 15G, 11 ms (in package)
Enclosure class	NEMA 1/IP21 or NEMA 12/IP54, open chassis/IP20


Description	Specification
Control Connections	
Analog input voltage	0 to 10V, $R = 200$ kohms (–10 to 10V joystick control) resolution 0.1%; accuracy $\pm 1\%$
Analog input current	0(4) to 20 mA; R_i —250 ohms differential
Digital inputs (6)	Positive or negative logic; 18 to 30 Vdc
Auxiliary voltage	+24V $\pm 15\%$, max. 250 mA
Output reference voltage	+10V $\pm 3\%$, max. load 10 mA
Analog output	0(4) to 20 mA; R_L max. 500 ohms; resolution 10 bit; Accuracy $\pm 2\%$
Digital outputs	Open collector output, 50 mA/48V
Relay outputs	2 programmable Form C relay outputs switching capacity: 24 Vdc/8A, 250 Vac/8A, 125 Vdc/0.4A
Protections	
Overcurrent protection	Trip limit 4.0 $\times I_H$ instantaneously
Overvoltage protection	Yes
Undervoltage protection	Yes
Earth fault protection	In case of earth fault in motor or motor cable, only the frequency converter is protected
Input phase supervision	Trips if any of the input phases are missing
Motor phase supervision	Trips if any of the output phases are missing
Overtemperature protection	Yes
Motor overload protection	Yes
Motor stall protection	Yes
Motor underload protection	Yes
Short circuit protection	Yes (+24V and +10V reference voltages)
High Performance Features	
Speed error	<0.01%, depending on the encoder
Encoder support	Incremental or absolute
Encoder voltages	5V (RS-422), 15V or 24V, depending on the option card
Torque control	Full torque control at all speeds, including zero
Torque accuracy	<2%; <5% down to zero speed
Starting torque	>200%, depending on motor and drive sizing
Master/slave configurations	Full capability
System analysis	Integrated data logger
PC communication	Fast multiple drive monitoring with PC
Inter-drive communication	High-speed bus (12 Mbits/s)
High-speed applications	Up to 7200 Hz

Dimensions

Approximate Dimensions in Inches (mm)

9000X Drives

NEMA Type 1/IP21 and NEMA Type 12/IP54, FR4, FR5 and FR6

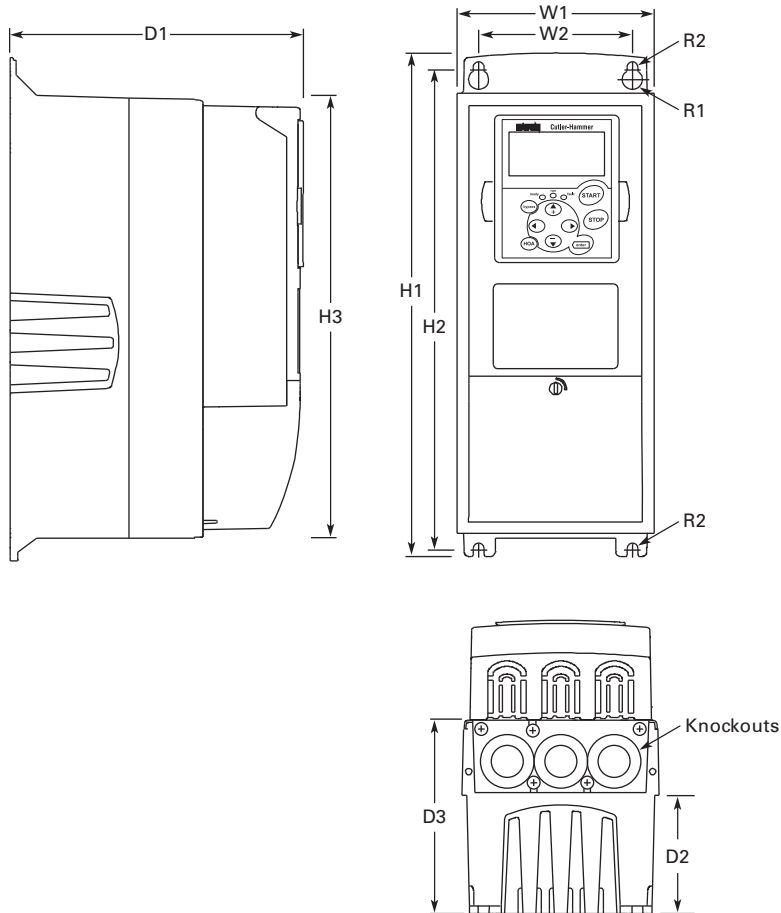

Voltage	hp (I _H)	H1	H2	H3	D1	D2	D3	W1	W2	R1 Dia.	R2 Dia.	Weight Lbs (kg)	Knockouts at Inches (mm) N1 (O.D.)
FR4													
230V	3/4–3	12.9	12.3	11.5	7.5	3.0	5.0	5.04	3.9	0.5	0.3	11.0 (5)	3 at 10.1 (28)
480V	1–5	(327)	(313)	(292)	(190)	(77)	(126)	(128)	(100)	(13)	(7)		
FR5													
230V	5–7-1/2	16.5	16.0	15.3	8.4	3.9	5.8	5.7	3.9	0.5	0.3	17.9 (8)	2 at 1.5 (37)
480V	7-1/2–15	(419)	(406)	(389)	(214)	(100)	(148)	(144)	(100)	(13)	(7)		1 at 10.1 (28)
FR6													
230V	10–15	22.0	21.3	20.4	9.3	4.2	6.5	7.7	5.8	0.6	0.4	40.8 (19)	3 at 1.5 (37)
480V	20–30	(558)	(541)	(519)	(237)	(105)	(165)	(195)	(148)	(15.5)	(9)		
575V	2–25												

2.4


Adjustable Frequency Drives

SPX9000 Drives

Approximate Dimensions in Inches (mm)

NEMA Type 1/IP21 and NEMA Type 12/IP54 with Flange Kit, FR4, FR5 and FR6

2

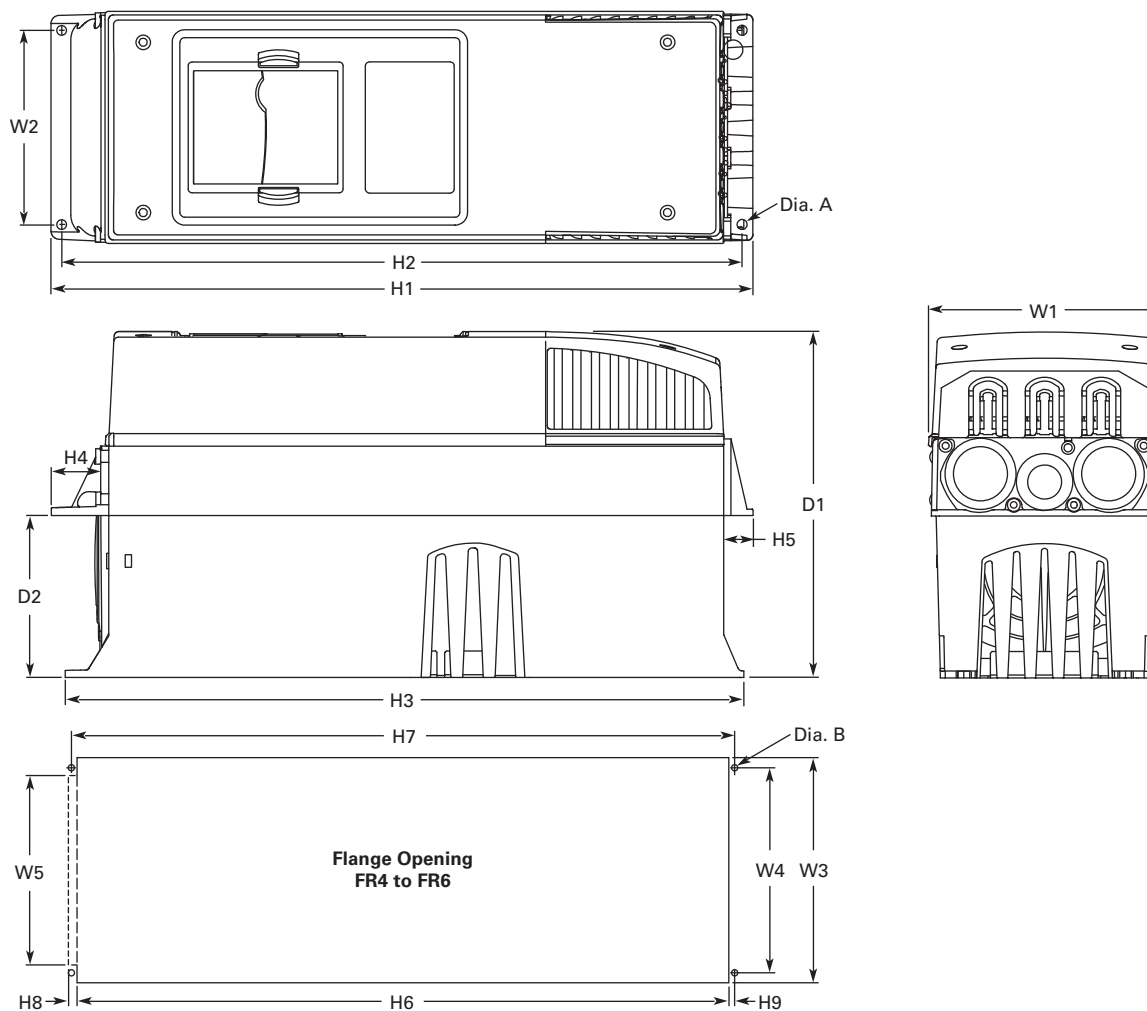

FR4, FR5 and FR6 with Flange Kit

W1	W2	H1	H2	H3	H4	H5	D1	D2	Dia. A
FR4									
5.0 (128)	4.5 (113)	13.3 (337)	12.8 (325)	12.9 (327)	1.2 (30)	0.9 (22)	7.5 (190)	3.0 (77)	0.3 (7)
FR5									
5.6 (143)	4.7 (120)	17.0 (434)	16.5 (420)	16.5 (419)	1.4 (36)	0.7 (18)	8.4 (214)	3.9 (100)	0.3 (7)
FR6									
7.7 (195)	6.7 (170)	22.0 (560)	21.6 (549)	22.0 (558)	1.2 (30)	0.8 (20)	9.3 (237)	4.2 (106)	0.3 (7)


Flange Opening, FR4 to FR6

W3	W4	W5	H6	H7	H8	H9	Dia. B
FR4							
4.8 (123)	4.5 (113)	—	12.4 (315)	12.8 (325)	—	0.2 (5)	0.3 (7)
FR5							
5.3 (135)	4.7 (120)	—	16.2 (410)	16.5 (420)	—	0.2 (5)	0.3 (7)
FR6							
7.3 (185)	6.7 (170)	6.2 (157)	21.2 (539)	21.6 (549)	0.3 (7)	0.2 (5)	0.3 (7)

Approximate Dimensions in Inches (mm)

NEMA Type 1/IP21 and NEMA Type 12/IP54, FR7

2

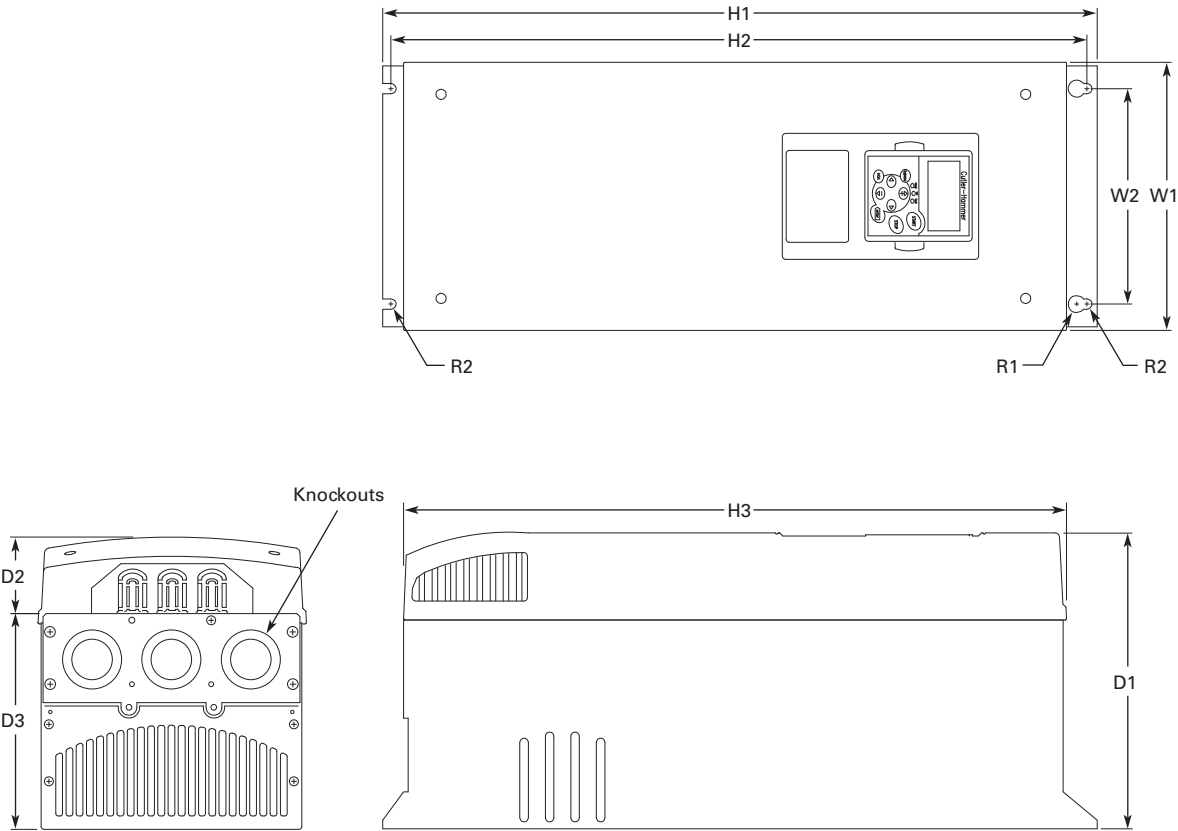

Voltage	hp (I _H)	H1	H2	H3	D1	D2	D3	W1	W2	R1 Dia.	R2 Dia.	Weight Lbs (kg)	Knockouts at Inches (mm) N1 (O.D.)
230V	20–30	24.8 (630)	24.2 (614)	23.2 (590)	10.1 (257)	3.0 (77)	7.3 (184)	9.3 (237)	7.5 (190)	0.7 (18)	0.4 (9)	77.2 (35)	3 at 1.5 (37)
480V	40–60												
575V	30–40												

2.4


Adjustable Frequency Drives

SPX9000 Drives

Approximate Dimensions in Inches (mm)

NEMA Type 1/IP21 and NEMA Type 12/IP54, FR8


2

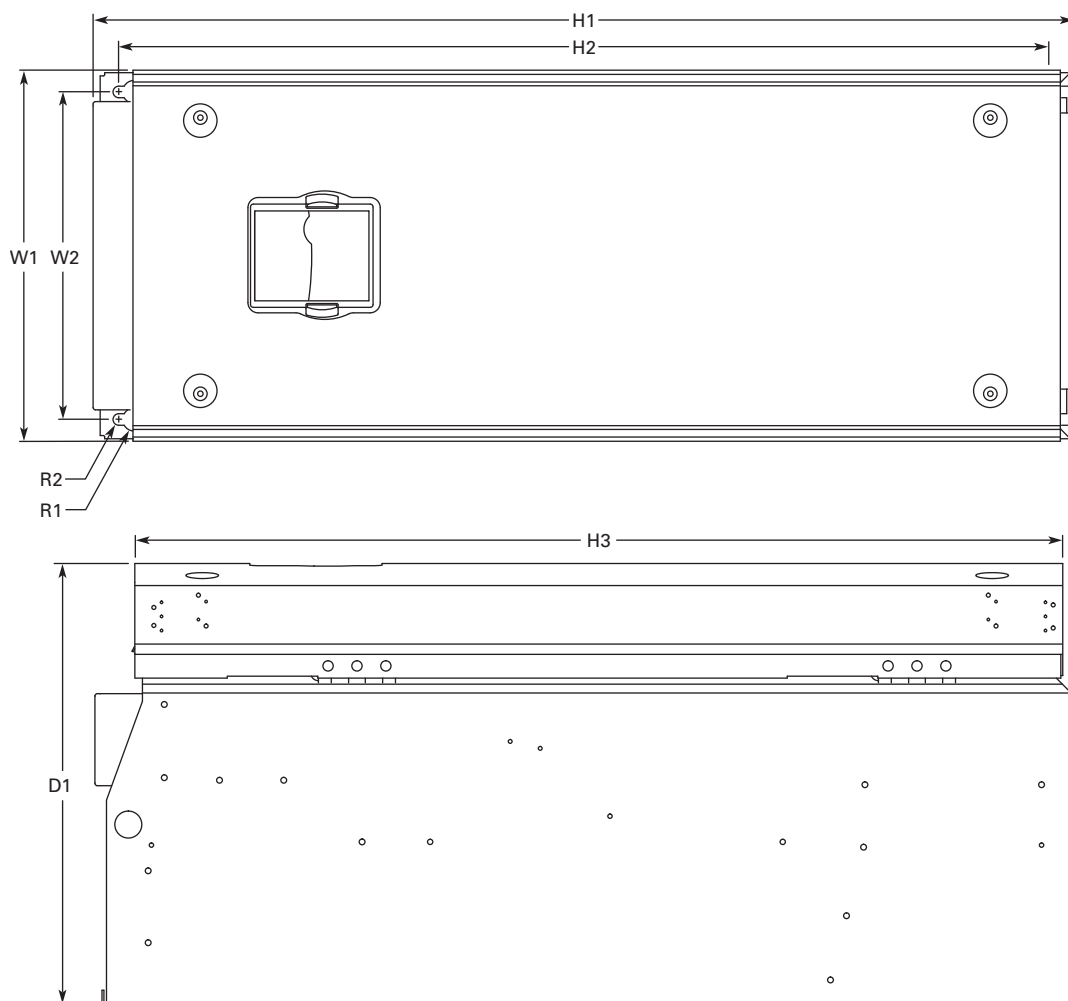

Voltage	hp (I _H)	D1	H1	H2	H3	W1	W2	R1 Dia.	R2 Dia.	Weight Lbs (kg)
230V	40–60	13.5 (344)	300.1 (764)	28.8 (732)	28.4 (721)	11.5 (291)	10 (255)	0.7 (18)	0.4 (9)	127 (58)
480V	75–125									
575V	50–75									

Approximate Dimensions in Inches (mm)

NEMA Type 1/IP21 and NEMA Type 12/IP54, with Flange Kit, FR7 and FR8

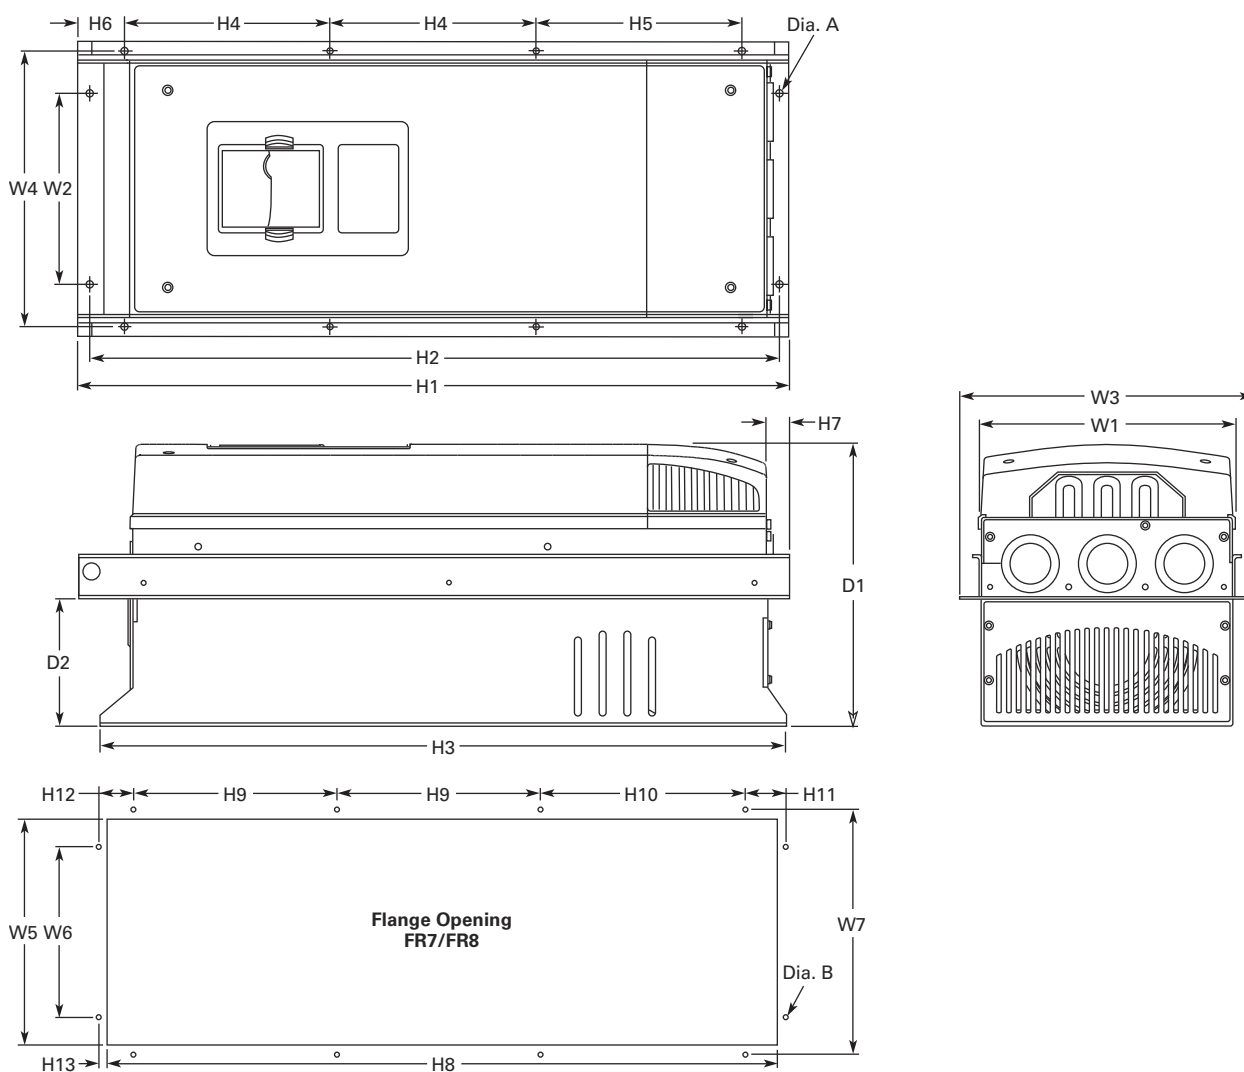

W1	W2	W3	W4	H1	H2	H3	H4	H5	H6	H7	D1	D2	Dia. A
FR7													
9.3 (237)	6.8 (175)	10.6 (270)	10.0 (253)	25.6 (652)	24.9 (632)	24.8 (630)	7.4 (189)	7.4 (189)	0.9 (23)	0.8 (20)	10.1 (257)	4.6 (117)	0.3 (6)
FR8													
11.2 (285)	—	14.0 (355)	13.0 (330)	32.8 (832)	—	29.3 (745)	10.2 (258)	10.4 (265)	1.7 (43)	2.2 (57)	13.5 (344)	4.3 (110)	0.4 (9)

Flange Opening, FR7 and FR8

W5	W6	W7	H8	H9	H10	H11	H12	H13	Dia. B
FR7									
9.2 (233)	6.9 (175)	10.0 (253)	24.4 (619)	7.4 (189)	7.4 (189)	1.4 (35)	1.3 (32)	1.0 (25)	0.3 (6)
FR8									
11.9 (301)	—	13.0 (330)	31.9 (810)	10.2 (258)	10.4 (265)	—	—	1.3 (33)	0.4 (9)

2.4


Adjustable Frequency Drives

SPX9000 Drives

Approximate Dimensions in Inches (mm)

NEMA Type 1/IP21 and NEMA Type 12/IP54, FR9


2

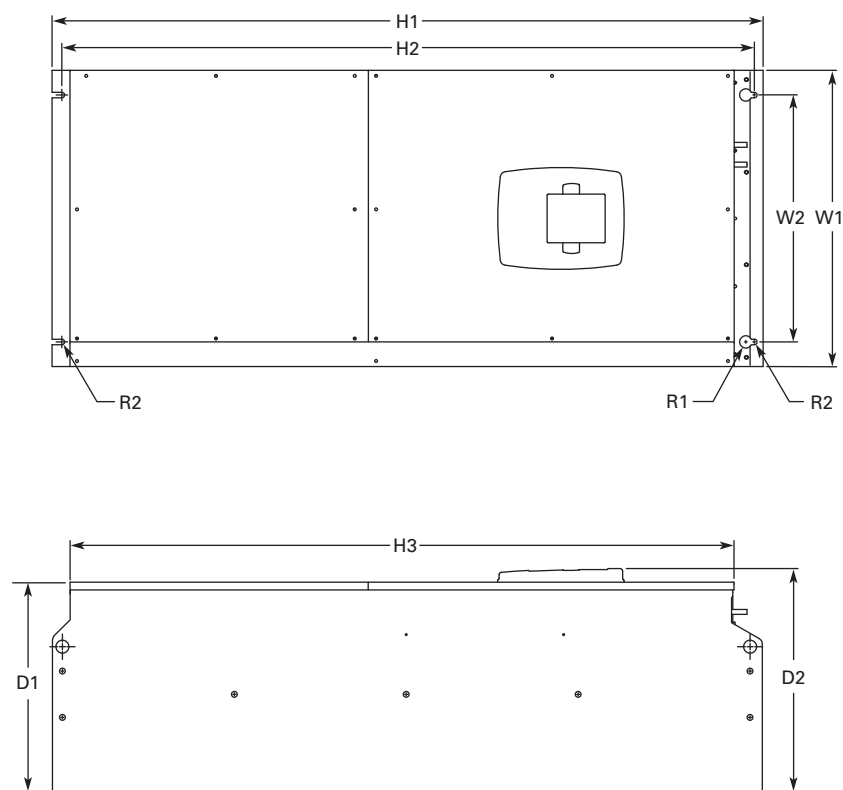

Voltage	hp (I _H)	H1	H2	H3	D1	D2	W1	W2	R1 Dia.	R2 Dia.	Weight Lbs (kg)
230V	75–100	45.3 (1150)	44.1 (1120)	42.4 (1076)	13.4 (340)	14.3 (362)	18.9 (480)	15.7 (400)	0.8 (20)	0.4 (9)	322 (146)
480V	150–200										
575V	100–175										

Approximate Dimensions in Inches (mm)

NEMA Type 1/IP21 and NEMA Type 12/IP54, FR9, continued

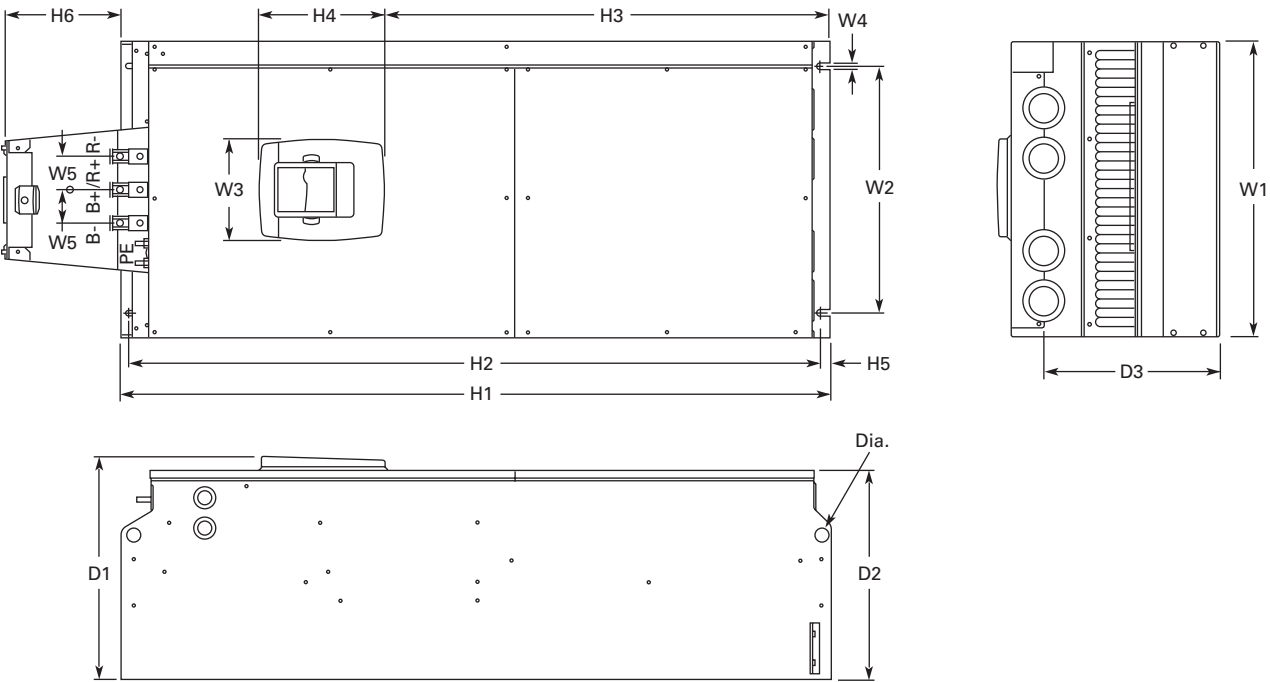

W1	W2	W3	W4	W5	H1	H2	H3	H4	H5	H6 ①	D1	D2	D3	Dia.
18.9 (480)	15.7 (400)	6.5 (165)	0.4 (9)	2.1 (54)	45.3 (1150)	44.1 (1120)	28.3 (721)	8.0 (205)	0.6 (16)	7.4 (188)	14.2 (361.5)	13.4 (340)	11.2 (285)	0.8 (21)

Note

① Brake resistor terminal box (H6) included when brake chopper ordered.

2.4


Adjustable Frequency Drives

SPX9000 Drives

Approximate Dimensions in Inches (mm)

NEMA Type 1/IP21 and NEMA Type 12/IP54, FR9 with Flange Kit


2

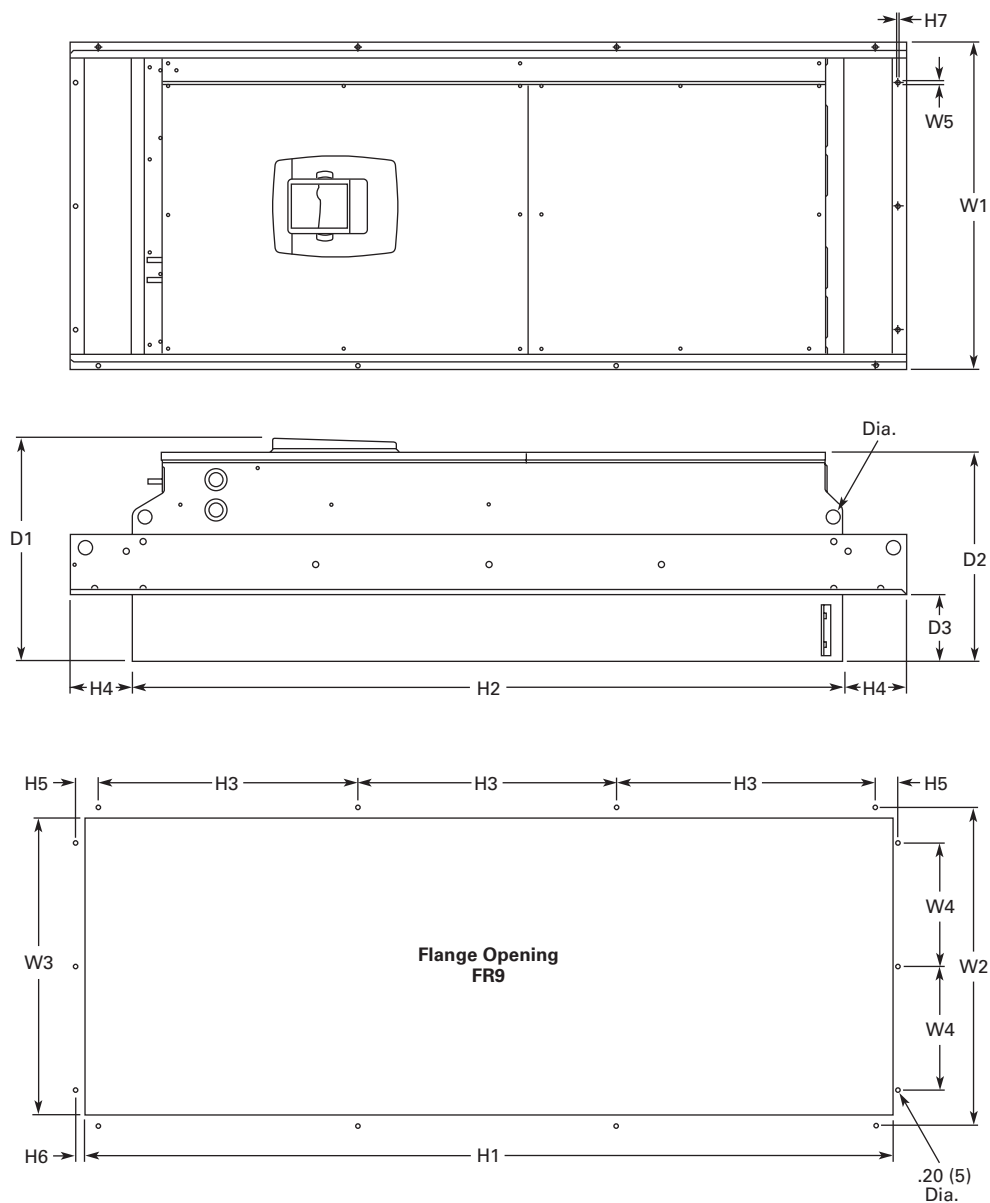

W1	W2	W3	W4	W5	H1	H2	H3	H4	H5	H6	H7	D1	D2	D3	Dia.
20.9 (530)	20.0 (510)	19.1 (485)	7.9 (200)	0.2 (5.5)	51.7 (1312)	45.3 (1150)	16.5 (420)	3.9 (100)	1.4 (35)	0.4 (9)	0.1 (2)	24.9 (362)	13.4 (340)	4.3 (109)	0.8 (21)

Approximate Dimensions in Inches (mm)

NEMA Type 1/IP21 and NEMA Type 12/IP54, FR10 Freestanding

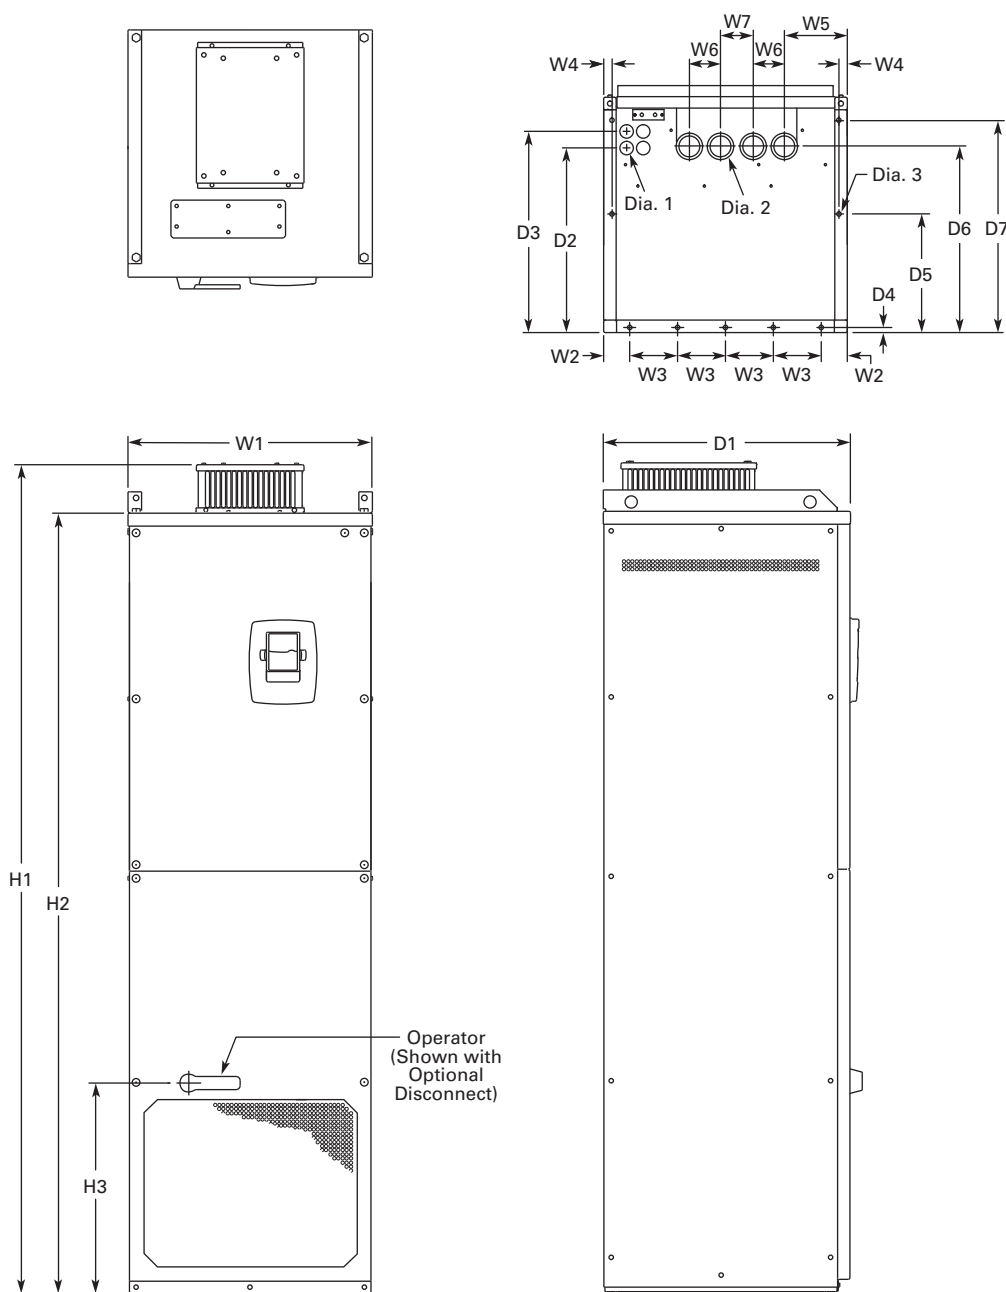

Volts	hp (I _H)	W1	W2	W3	W4	W5	W6	W7	H1	H2	H3	D1	D2	D3	D4	D5	D6	D7	Dia. 1	Dia. 2	Dia. 3	Weight Lbs (kg)
480V	250-350	23.43	2.46	4.53	0.79	5.95	2.95	30.11	79.45	74.80	20.18	23.70	17.44	19.02	0.47	11.22	17.60	20.08	0.83	1.89	0.43	875 (389)
690V	200-300	(595)	(62.5)	(115)	(20)	(151)	(75)	(79)	(2018)	(1900)	(512.5)	(602)	(443)	(483)	(12)	(285)	(447)	(510)	(21)	(48)	(11)	

2.4


Adjustable Frequency Drives

SPX9000 Drives

Approximate Dimensions in Inches (mm)

FR10 Open Chassis ①

2

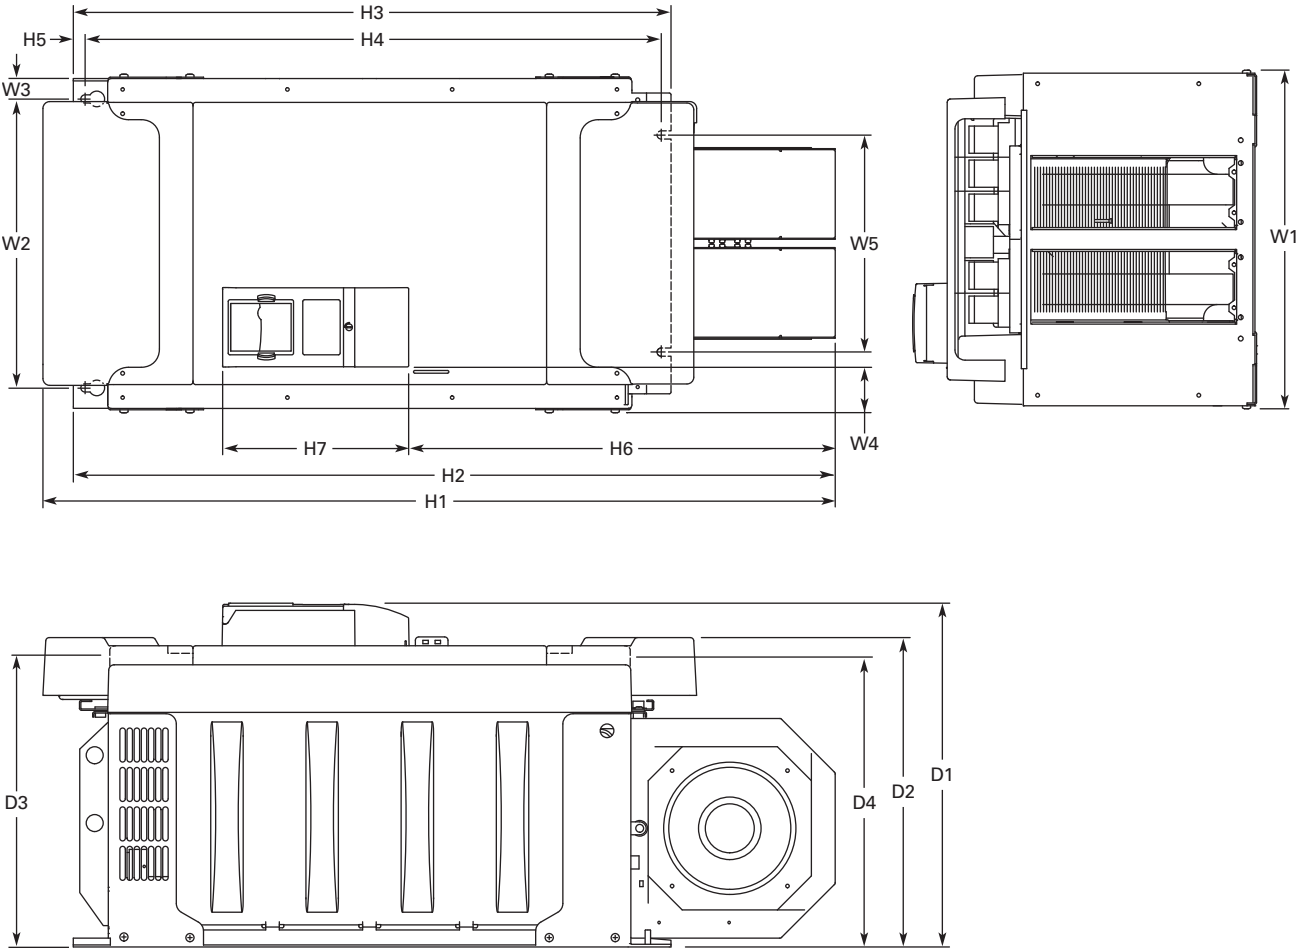

Voltage	hp (I _H)	W1	W2	W3	W4	W5	H1	H2	H3	H4	H5	H6	H7	D1	D2	D3	D4	Weight Lbs (kg)
480V	250–350	19.7 (500)	16.7 (425)	1.2 (30)	2.6 (67)	12.8 (325)	45.9 (1165)	44.1 (1121)	34.6 (879)	33.5 (850)	0.7 (17)	24.7 (627)	10.8 (275)	19.9 (506)	17.9 (455)	16.7 (423)	16.6 (421)	518 (235)
575V	200–300																	


Note

① SPX9000X FR12 is built of two FR10 modules. Please refer to SPX9000 installation manual for mounting instructions.

Approximate Dimensions in Inches (mm)

NEMA Type 1/IP21, FR11 Freestanding Drive

2

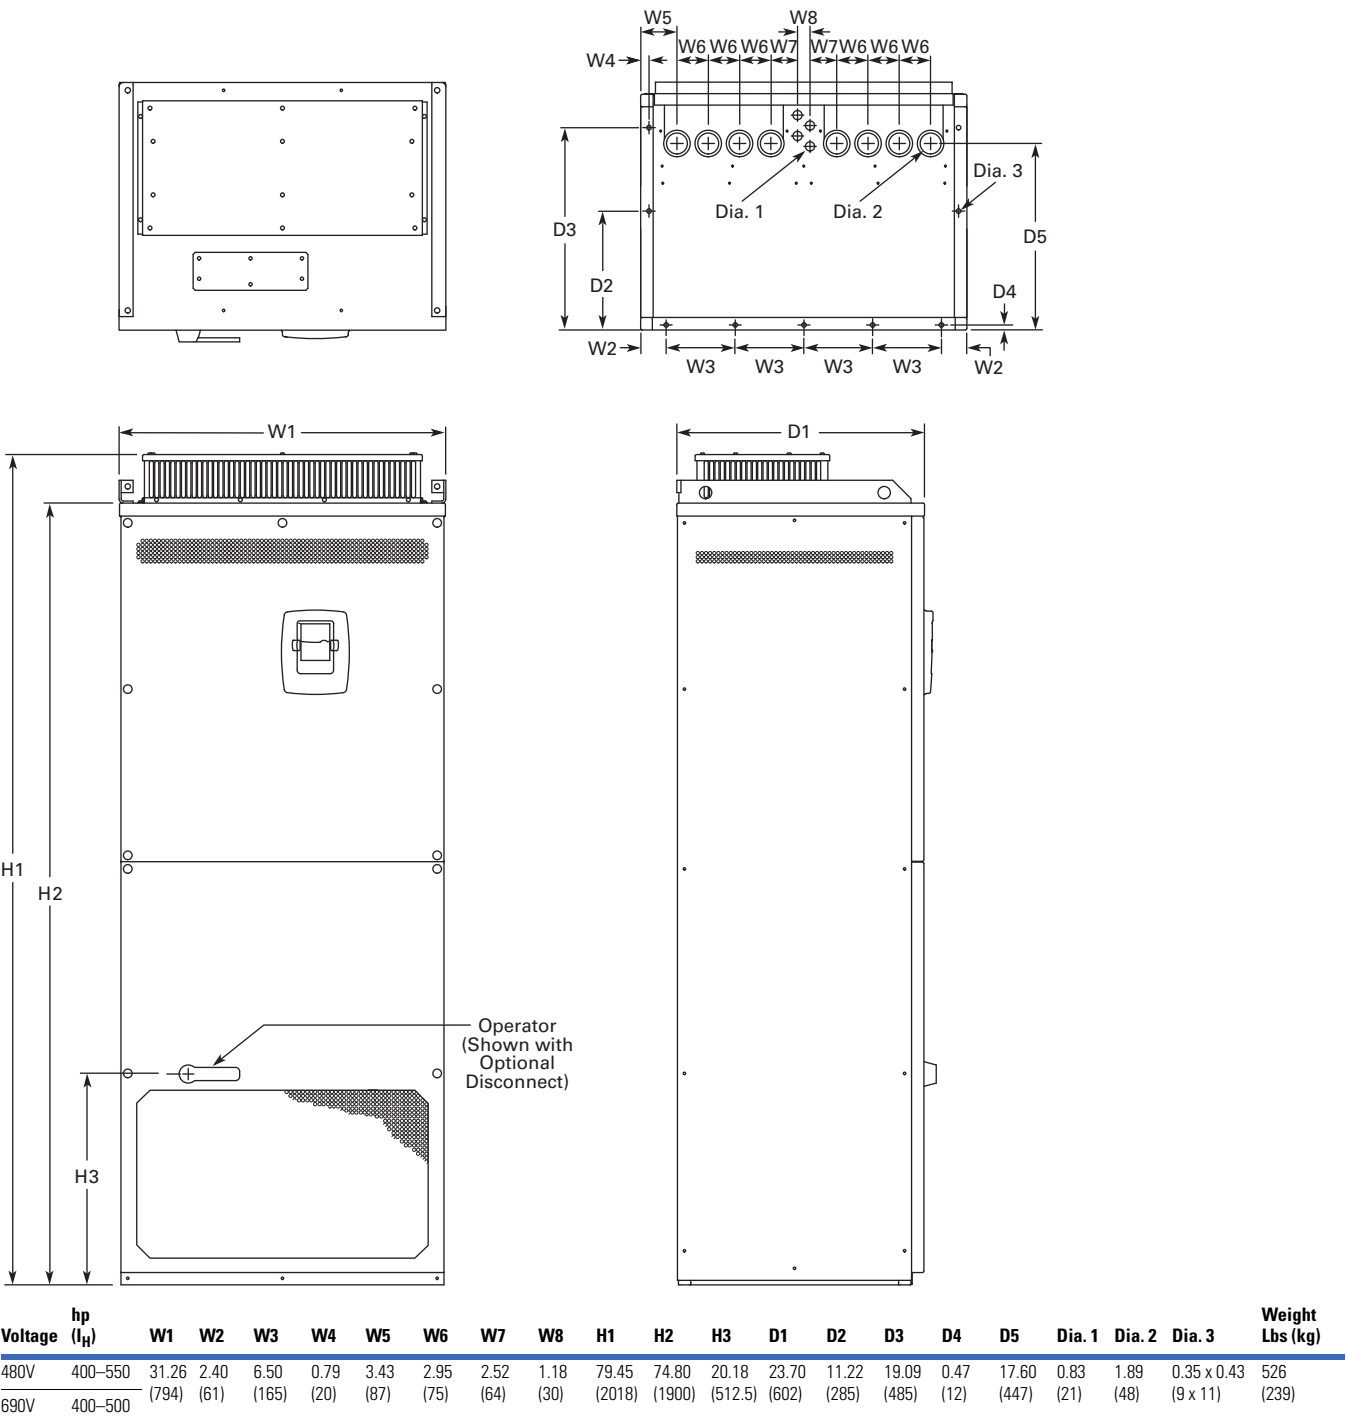

2.4


Adjustable Frequency Drives

SPX9000 Drives

Approximate Dimensions in Inches (mm)

FR11 Open Chassis

2

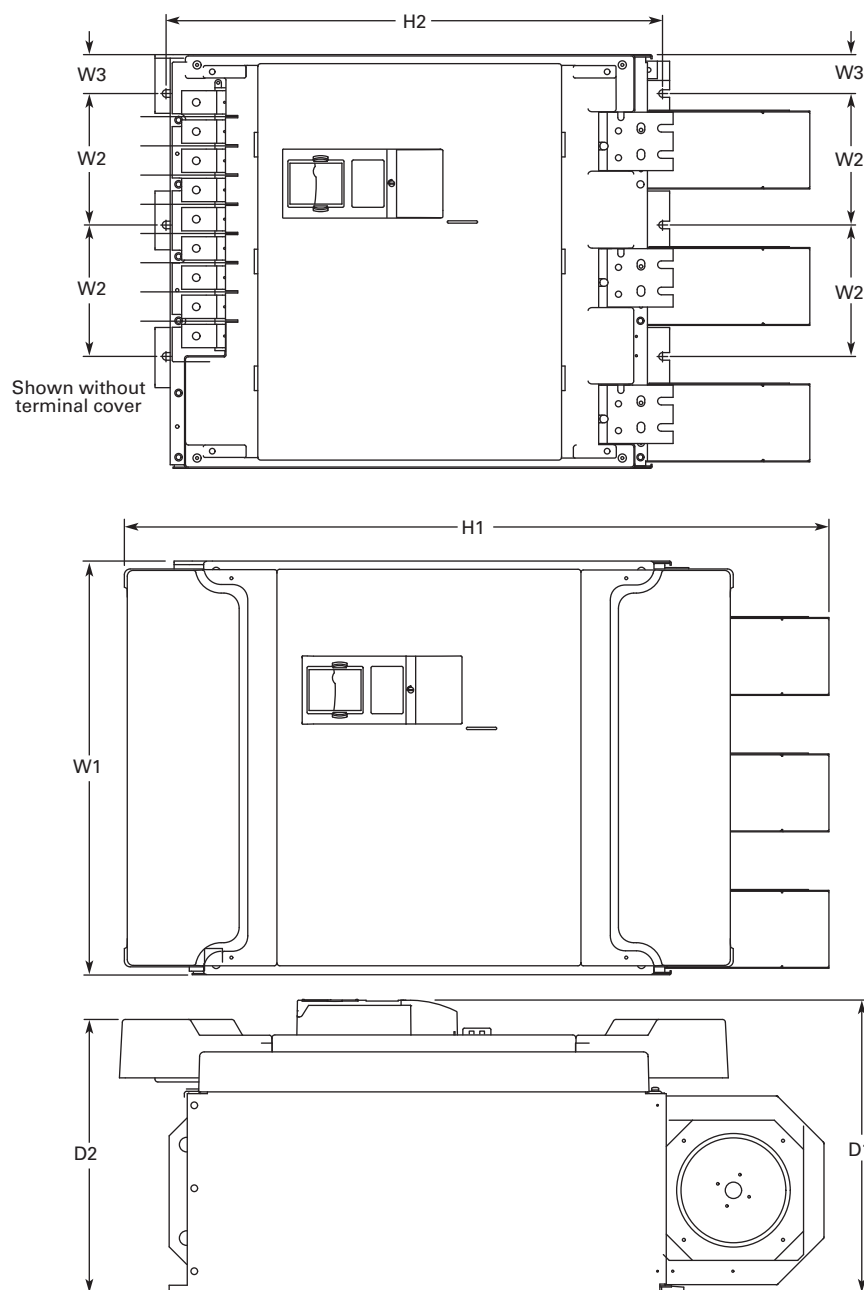


Voltage	hp (I _H)	W1	W2	W3	H1	H2	D1	D2	Weight Lbs (kg)
480V	400–550	27.9 (709)	8.6 (225)	2.6 (67)	45.5 (1155)	33.5 (850)	19.8 (503)	18.4 (468)	833 (378)
575V	400–500								

Approximate Dimensions in Inches (mm)

FR13, Open Chassis Inverter

2

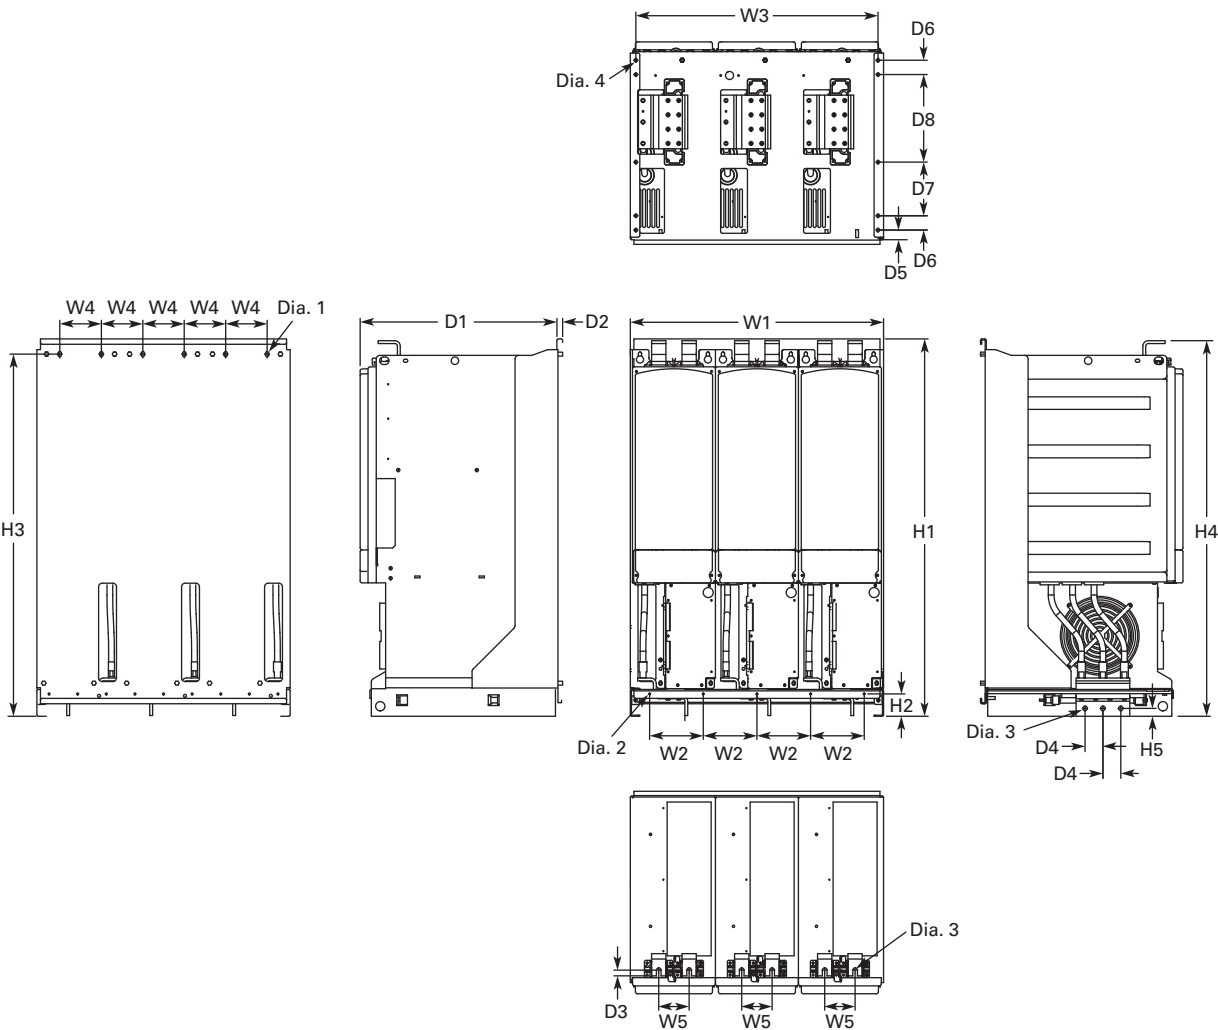

W1	W2	W3	W4	W5	H1	H2	H3	H4	H5	D1	D2	D3	D4	D5	D6	D7	D8	Dia. 1	Dia. 2	Dia. 3	Dia. 4	Weight Lbs (kg)
27.87 (708)	5.91 (150)	26.65 (677)	4.57 (116)	3.35 (85)	41.54 (1055)	2.46 (62.5)	39.86 (1012.5)	41.34 (1050)	0.79 (20)	21.77 (553)	0.51 (13)	0.63 (16)	1.97 (50)	1.06 (27)	1.57 (40)	5.91 (150)	9.64 (244.8)	0.35x0.59 (9x15)	0.18 (4.6)	0.51 (13)	0.37 (9.5)	683 (310)

Notes
9000X FR14 is built of two FR13 modules. Please refer to SPX9000 installation manual for mounting instructions.
FR13 is built from an inverter module and a converter module. Please refer to SPX9000 installation manual for mounting instructions.

2.4


Adjustable Frequency Drives

SPX9000 Drives

Approximate Dimensions in Inches (mm)

FR13, Open Chassis Converter

2

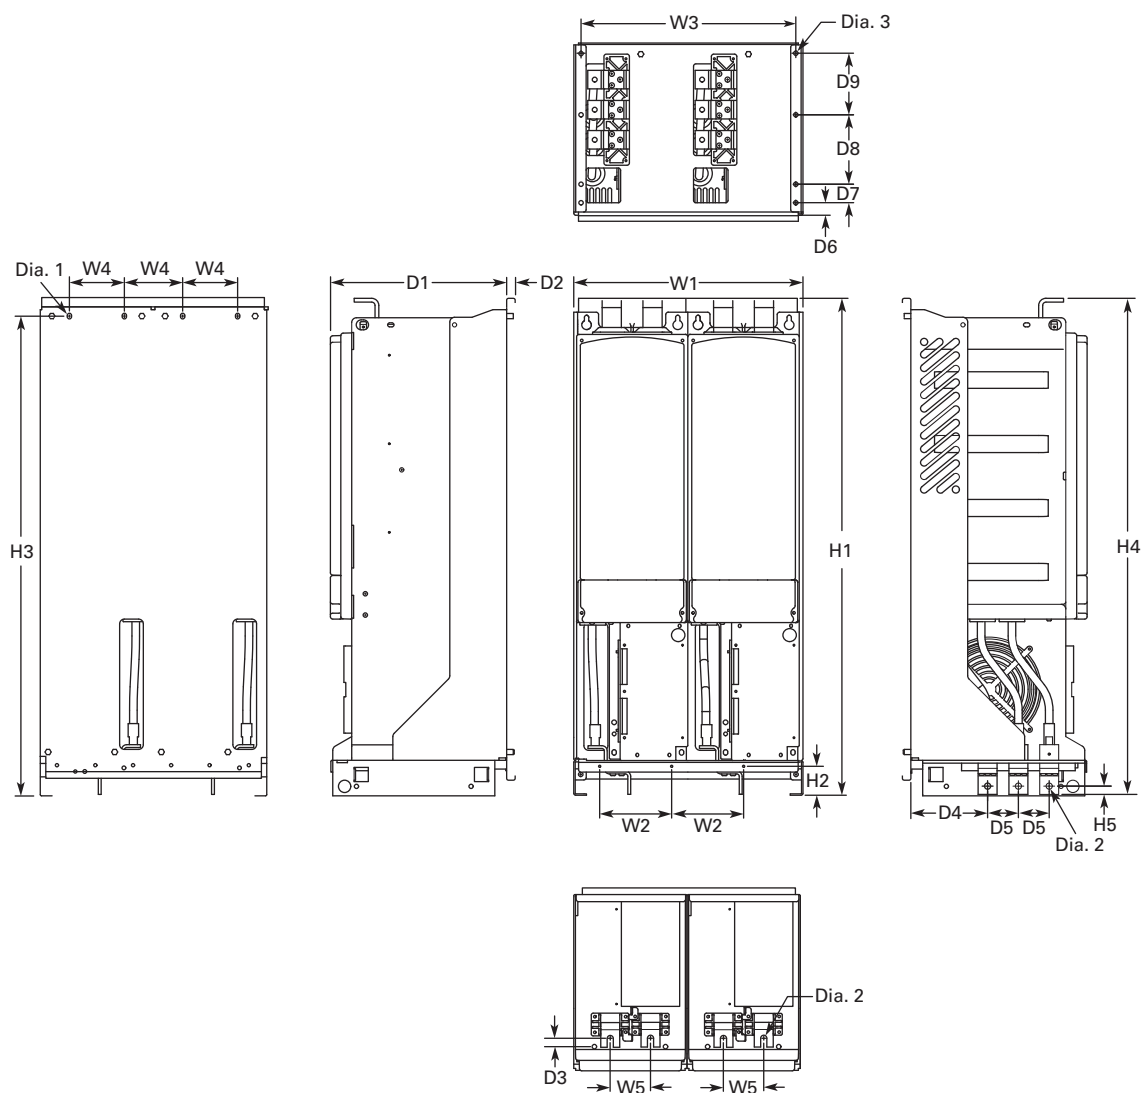

W1	W2	W3	W4	W5	H1	H2	H3	H4	H5	D1	D2	D3	D4	D5	D6	D7	D8	D9	Dia. 1	Dia. 2	Dia. 3	Weight Lbs (kg)
18.74 (476)	5.91 (150)	17.52 (445)	4.57 (116)	3.35 (85)	41.54 (1055)	2.46 (62.5)	39.86 (1012.5)	41.34 (1050)	0.69 (17.5)	14.69 (373)	0.51 (13)	0.73 (18.5)	6.42 (163)	2.56 (65)	1.06 (27)	1.57 (40)	5.91 (150)	5.24 (133)	0.35x0.59 (9x15)	0.51 (13)	0.37 (9.5)	295 (134)


Number of Input Units

480V Catalog Number	hp	Input Modules
SPX800A0-4A2N1	800	2

690V Catalog Number	hp	Input Modules
SPX800A0-5A2N1	800	2
SPX900A0-5A2N1	900	2
SPXH10A0-5A2N1	1000	2

Approximate Dimensions in Inches (mm)

FR13, Open Chassis Converter—900/1000 hp 480V

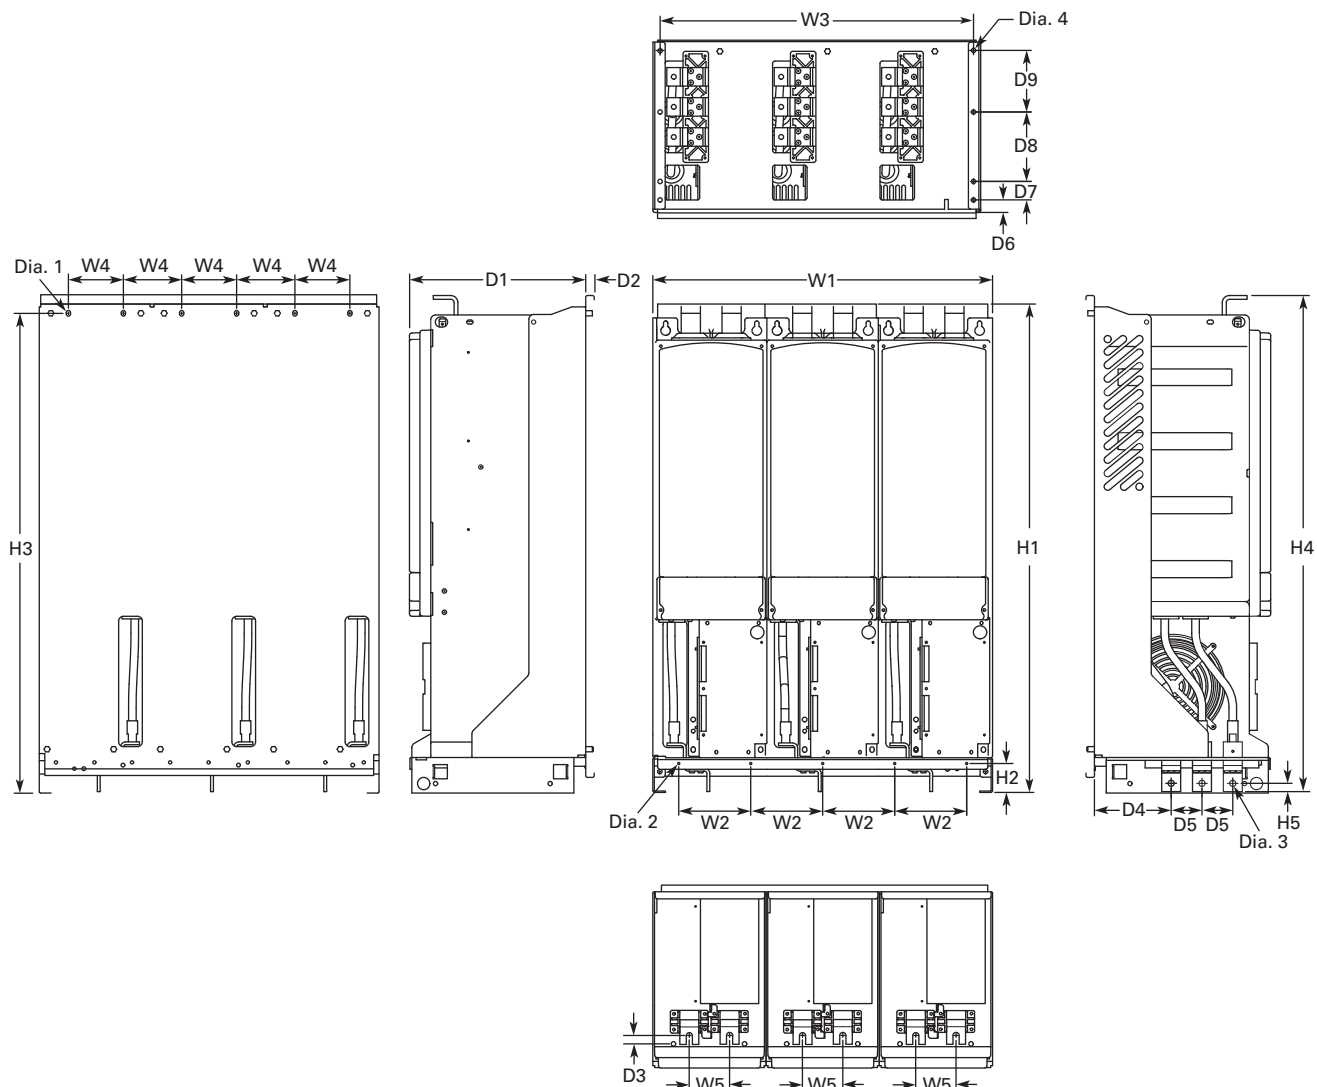

W1	W2	W3	W4	W5	H1	H2	H3	H4	H5	D1	D2	D3	D4	D5	D6	D7	D8	D9	Dia. 1	Dia. 2	Dia. 3	Dia. 4	Weight Lbs (kg)
27.87 (708)	5.91 (150)	26.65 (677)	4.57 (116)	3.35 (85)	41.54 (1055)	2.46 (62.5)	39.86 (1012.5)	41.34 (1050)	0.69 (17.5)	14.69 (373)	0.51 (13)	0.73 (18.5)	6.42 (163)	2.56 (65)	1.06 (27)	1.57 (40)	5.91 (150)	5.24 (133)	0.35x0.59 (9x15)	0.18 (4.6)	0.51 (13)	0.37 (9.5)	443 (201)

Number of Input Units

480V Catalog Number	hp	Input Modules
SPX900A0-4A2N1	900	3
SPXH10A0-4A2N1	1000	3

2.4

Adjustable Frequency Drives

SPX9000 Drives

Approximate Dimensions in Inches (mm)

2


AC Choke Dimensions

Choke Types

Catalog Number	Frame Size	Choke Type ^①
Voltage Range 380–500V		
SPX 250 4	FR10	CHK0400
SPX 300 4		CHK0520
SPX 350 4		CHK0520
SPX 400 4	FR11	2 x CHK0400
SPX 500 4		2 x CHK0400
SPX 550 4		2 x CHK0400
SPX 600 4	FR12	2 x CHK0520
SPX 650 4		2 x CHK0520
SPX 700 4		2 x CHK0520
SPX 800 4	FR13	2 x CHK0400
SPX 900 4		3 x CHK0520
SPX H10 4		3 x CHK0520
SPX H12 4	FR14	4 x CHK0520
SPX H16 4		6 x CHK0400

Catalog Number	Frame Size	Choke Type ^①
Voltage Range 525–690V		
SPX 200 5	FR10	CHK0261
SPX 250 5		CHK0400
SPX 300 5		CHK0400
SPX 400 5	FR11	CHK0520
SPX 450 5		CHK0520
SPX 500 5		2 x CHK0400
SPX 550 5	FR12	2 x CHK0400
SPX 600 5		2 x CHK0400
SPX 700 5		2 x CHK0400
SPX 800 5	FR13	2 x CHK0400
SPX 900 5		2 x CHK0400
SPX H10 5		2 x CHK0400
SPX H13 5	FR14	4 x CHK0400
SPX H15 5		6 x CHK0400



CHK0520

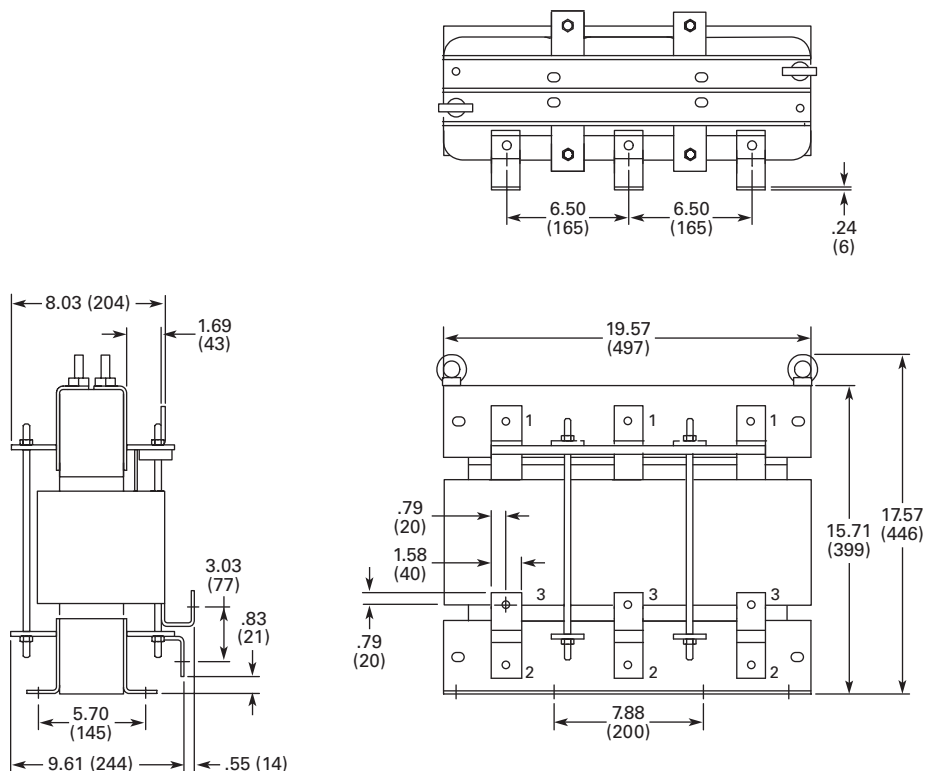

Note

① Chokes are provided with all FR10–FR14 drives.

Approximate Dimensions in Inches (mm)

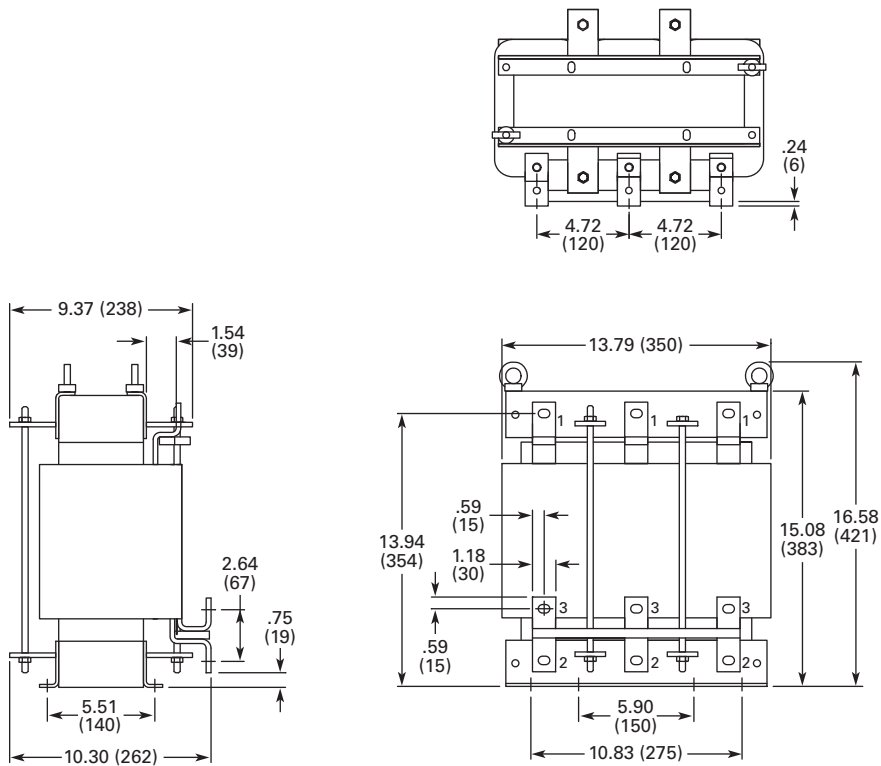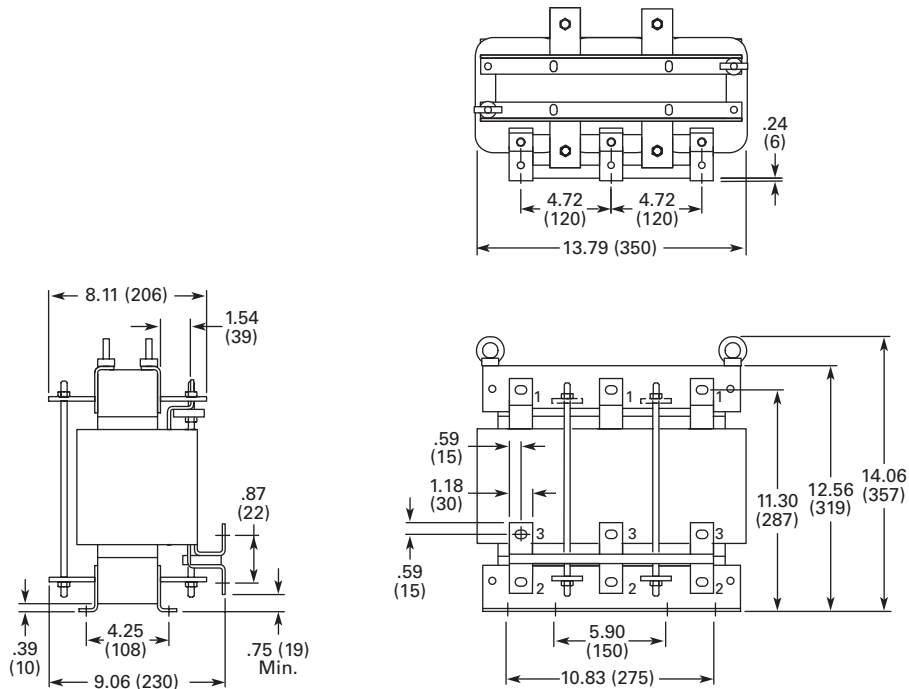CHK0400**CHK0261**

SPA9000/SPN9000/SPI9000 Common DC Bus Drive Products



Contents

Description	Page
SPA9000/SPN9000/SPI9000 Common DC Bus Drive Products	
Application Description	V6-T2-240
Product Comparison	V6-T2-240
Features	V6-T2-241
Standards and Certifications	V6-T2-241
Catalog Number Selection	V6-T2-241
Product Selection	V6-T2-243
Options	V6-T2-246
Technical Data and Specifications	V6-T2-247
Wiring Diagrams	V6-T2-249
Dimensions	V6-T2-250

Product Description

Eaton offers a comprehensive range of common DC bus drive products. The product family covers a number of front-end units and inverter units in the entire power range from 1-1/2 to 2000 horsepower at 460V and 690V. The drive components are built on the SPX9000 technology.

Front-End Units

The front-end units convert a mains AC voltage and current into a DC voltage and current. The power is transferred from the mains to a common DC bus (and, in certain cases, vice versa).

The SPA (active front-end) unit is a bidirectional (regenerative) power converter for the front end of a common DC bus drive line up. An external LCL filter is used at the input. This unit is suitable in applications where low mains harmonics are required.

The SPN (non-regenerative front-end) unit is a uni-directional (motoring) power converter for the front-end of a common DC bus drive line-up. The device operates as a diode bridge using diode/thyristor components. A dedicated external choke is used at the input. The unit has the capacity to charge a common DC bus. This unit is suitable as a rectifying device when a “normal” level of harmonics is accepted and no regeneration to the mains is required.

Inverter Unit

The SPI9000 Inverter Unit is a bidirectional DC-fed power inverter for the supply and control of AC motors. The inverter is supplied from a common DC bus drive line-up. A charging circuit is needed in case a connection to a live DC bus is required. The DC side charging circuit is integrated up to 75 kW (FR4–FR8) and external for higher power ratings (FI9–FI14).


Application Description

The common DC bus product portfolio fulfills all solution demands with a flexible architecture.

2


Front end units are selected according to the level of harmonics and power requirements. Typical drive system configurations are illustrated the following figures.

SPA + Inverters




- Low harmonics, $-P_{\text{mains}} \approx +P_{\text{mains}}/P_{\text{mains}} \leq \Sigma P_{\text{INU}}$
- Suitable for almost every application

SPN + Inverters



- Low total mains power, $P_{\text{mains}} \leq \Sigma P_{\text{INU}}$
- Suitable e.g. for small processing line with un- and recoiler, em-stop coasting

Combination Configuration

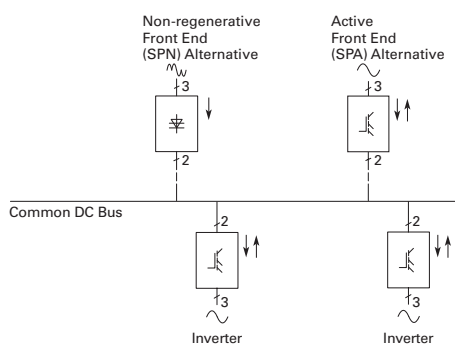

Common DC bus components are used in a multitude of combinations. Drives which are braking can transfer the energy directly to the drives in motoring mode.

Product Comparison

Advantages over Conventional Front Ends

Eaton Front Ends vs. Conventional

	Non-Regenerative Front End	Active Front End	Conventional Regenerative Front End ^①
Input device	Choke (L)	Filter (LCL)	Choke or auto-transformer (L)
Bridge type	Diode/thyristor bridge	IGBT bridge, two-level type	Anti-parallel connected thyristor bridge
Type of operation	Controlled half-bridge	High frequency modulation (1.5 to 3.6 kHz)	Firing angle controlled
Direction of power	Motoring	Motoring and regenerating	Motoring and regenerating
Charging	Constant current	External required	Usually internal
DC voltage	Nominal (approx. 1.35 alternative U_N)	Stable at +10% of nominal (approx. 110% of 1.35 alternative U_N)	Lowered DC voltage for commutation margin (e.g. 17% if approx. 83% of 1.35 alternative U_N) or autotransformer on regenerative bridge
THD	Similar to six-pulse bridge normal <40%	Very low	Similar to six-pulse bridge or worse

Note

^① Conventional regenerative front end (a.k.a. "anti-parallel thyristor bridge") is not available from Eaton.

Features

Standard Features

Feature	SPI9000 FR4, 6, 7	FR8	FI9-FI14	SPA FI9-FI14	SPN FI9
IP00	—	■	■	■	■
IP21	■	—	—	—	—
Air cooling	■	■	■	■	■
Standard board	■	■	■	■	—
Varnished board	—	—	—	—	—
Alphanumeric keypad	■	■	■	■	—
EMC class T (EN 61800-3 for IT networks)	■	■	■	■	■
Safety CE/UL	■	■	■	■	■
Input choke	—	—	—	—	■
LCL filter	—	—	—	■	—
No integrated charging	—	—	■	■	—
Integrated charging (DC side)	■	■	—	—	■
Diode/thyristor rectifier	—	—	—	—	■
IGBT	■	■	■	■	—


Standards and Certifications

- CE
- UL
- cUL
- EN 61800-5-1 (2003)




Catalog Number Selection

Active Front End

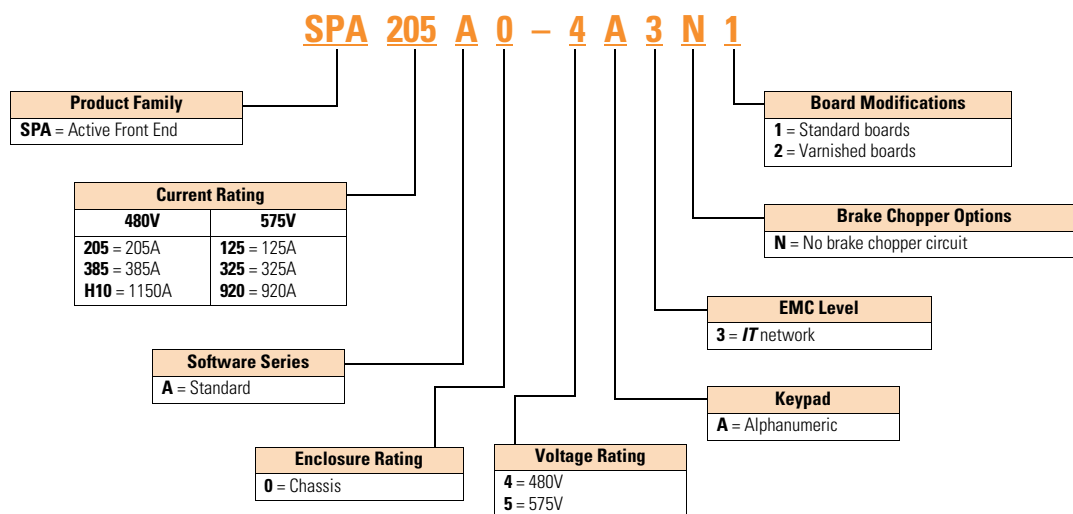


Non-Regenerative Front End

2

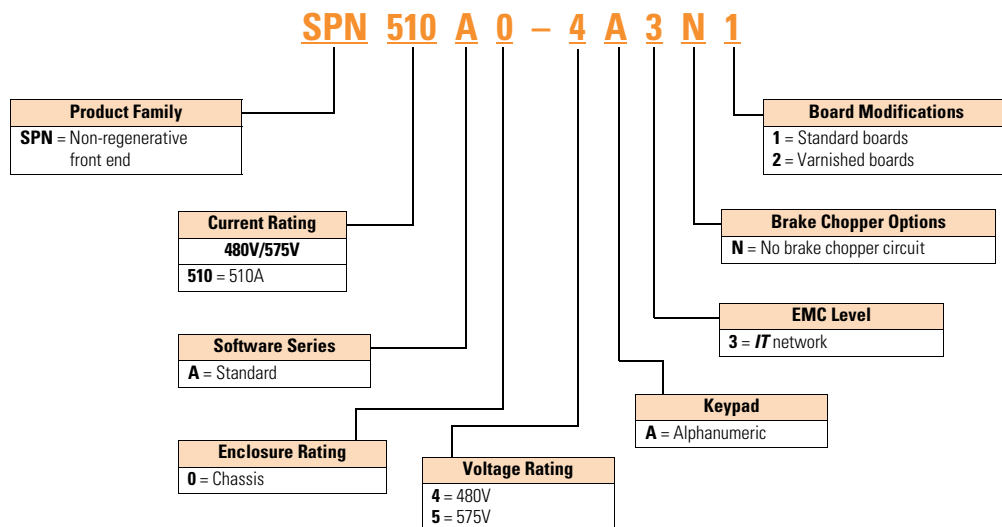

SPI9000 Inverter Unit

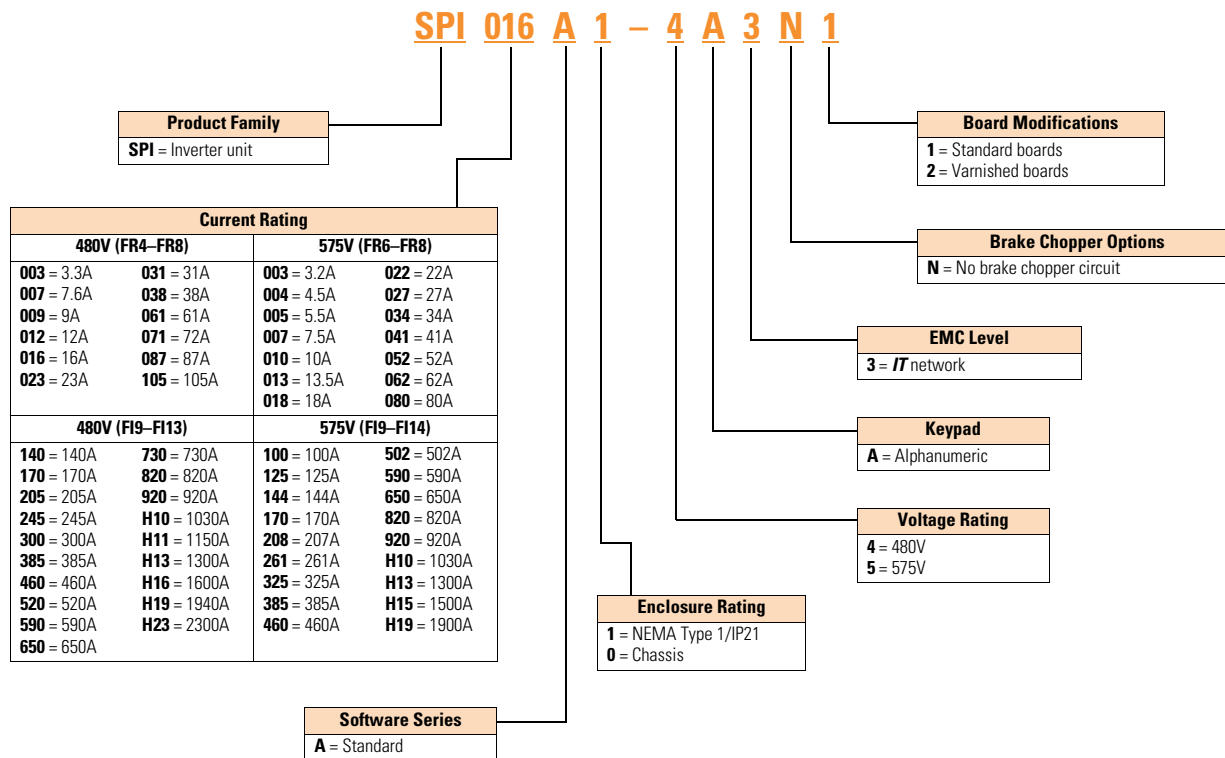

Product Selection

Common DC Bus Drive Products



SPA9000 Active Front End 480V

Frame	Low Overload (AC Current)		High Overload (AC Current)		I _{max}	Catalog Number
	I _{L-cont} (A)	I _{1min} (A)	I _{H-cont} (A)	I _{1min} (A)	I _{2s} (A)	
FI9	261	287	205	308	349	SPA205A0-4A3N1
FI10	460	506	385	578	693	SPA385A0-4A3N1
FI13	1300	1430	1150	1725	2070	SPAH11A0-4A3N1

SPN9000 Non-Regenerative Front End 480V

Frame	Low Overload (AC Current)		High Overload (AC Current)		I _{max}	Catalog Number
	I _{L-cont} (A)	I _{1min} (A)	I _{H-cont} (A)	I _{1min} (A)	I _{2s} (A)	
FI9	520	572	460	690	828	SPN460A0-4A3N1

SPI9000 Inverter Unit 480V

Frame	Low Overload (AC Current)		High Overload (AC Current)		I _{max}	Catalog Number
	I _{L-cont} (A)	I _{1min} (A)	I _{H-cont} (A)	I _{1min} (A)	I _{2s} (A)	
FR4	4.3	4.7	3.3	5	6.2	SPI003A1-4A3N1
	9	9.9	7.6	11.4	14	SPI007A1-4A3N1
	12	13.2	9	13.5	18	SPI009A1-4A3N1
FR6	16	17.6	12	18	24	SPI012A1-4A3N1
	23	25.3	16	24	32	SPI016A1-4A3N1
	31	34	23	35	46	SPI023A1-4A3N1
	38	42	31	47	62	SPI031A1-4A3N1
	46	51	38	57	76	SPI038A1-4A3N1
FR7	72	79	61	92	122	SPI061A1-4A3N1
	87	96	72	108	144	SPI072A1-4A3N1
	105	116	87	131	174	SPI087A1-4A3N1
FR8	140	154	105	158	210	SPI105A0-4A3N1
FI9	170	187	140	210	280	SPI140A0-4A3N1
	205	226	170	255	336	SPI170A0-4A3N1
	261	287	205	308	349	SPI205A0-4A3N1
	300	330	245	379	444	SPI245A0-4A3N1
FI10	385	424	300	450	540	SPI300A0-4A3N1
	460	506	385	578	693	SPI385A0-4A3N1
	520	572	460	690	828	SPI460A0-4A3N1
FI12	590	649	520	780	936	SPI520A0-4A3N1
	650	715	590	885	1062	SPI590A0-4A3N1
	730	803	650	975	1170	SPI650A0-4A3N1
	820	902	730	1095	1314	SPI730A0-4A3N1
	920	1012	820	1230	1476	SPI820A0-4A3N1
FI13	1030	1133	920	1380	1656	SPI920A0-4A3N1
	1150	1265	1030	1545	1854	SPIH10A0-4A3N1
	1300	1430	1150	1720	2070	SPIH11A0-4A3N1
FI14	1450	1595	1300	1950	2340	SPIH13A0-4A3N1
	1770	1947	1600	2400	2880	SPIH16A0-4A3N1
	2150	2365	1940	2910	3492	SPIH19A0-4A3N1

NoteFor filter and line reactor information, see **Page V6-T2-245**.

Common DC Bus Drive Products

2



SPA9000 Active Front End 575V

Frame	Low Overload (AC Current)		High Overload (AC Current)		I _{max} I _{2s} (A)	Catalog Number
	I _{L-cont} (A)	I _{1min} (A)	I _{H-cont} (A)	I _{1min} (A)		
FI9	144	158	125	188	213	SPA125A0-5A3N1
FI10	385	424	325	488	585	SPA325A0-5A3N1
FI13	1030	1133	920	1380	1656	SPA920A0-5A3N1

SPN9000 Non-Regenerative Front End 575V

Frame	Low Overload (AC Current)		High Overload (AC Current)		I _{max} I _{2s} (A)	Catalog Number
	I _{L-cont} (A)	I _{1min} (A)	I _{H-cont} (A)	I _{1min} (A)		
FI9	600	660	510	732	888	SPN510A0-5A3N1

SPI9000 Inverter Unit 575V

Frame	Low Overload (AC Current)		High Overload (AC Current)		I _{max} I _{2s} (A)	Catalog Number
	I _{L-cont} (A)	I _{1min} (A)	I _{H-cont} (A)	I _{1min} (A)		
FR6	4.5	5	3.2	5	6.4	SPI003A1-5A3N1
	5.5	6	4.5	7	9	SPI004A1-5A3N1
	7.5	8	5.5	8	11	SPI005A1-5A3N1
	10	11	7.5	11	15	SPI007A1-5A3N1
	13.5	15	10	15	20	SPI010A1-5A3N1
	18	20	13.5	20	27	SPI013A1-5A3N1
	22	24	18	27	36	SPI018A1-5A3N1
	27	30	22	33	44	SPI022A1-5A3N1
	34	37	27	41	54	SPI027A1-5A3N1
FR7	41	45	34	51	68	SPI034A1-5A3N1
	52	57	41	62	82	SPI041A1-5A3N1
FR8	62	68	52	78	104	SPI052A0-5A3N1
	80	88	62	93	124	SPI062A0-5A3N1
	100	110	80	120	160	SPI080A0-5A3N1
FI9	125	138	100	150	200	SPI100A0-5A3N1
	144	158	125	188	213	SPI125A0-5A3N1
	170	187	144	216	245	SPI144A0-5A3N1
	208	229	170	255	289	SPI170A0-5A3N1
FI10	261	287	208	312	375	SPI208A0-5A3N1
	325	358	261	392	470	SPI261A0-5A3N1
	385	424	325	488	585	SPI325A0-5A3N1
FI12	460	506	385	578	693	SPI385A0-5A3N1
	502	552	460	690	828	SPI460A0-5A3N1
	590	649	502	753	904	SPI502A0-5A3N1
	650	715	590	885	1062	SPI590A0-5A3N1
	750	825	650	975	1170	SPI650A0-5A3N1
FI13	920	1012	820	1230	1476	SPI820A0-5A3N1
	1030	1133	920	1380	1656	SPI920A0-5A3N1
	1180	1298	1030	1464	1755	SPIH10A0-5A3N1
FI14	1500	1650	1300	1950	2340	SPIH13A0-5A3N1
	1900	2090	1500	2250	2700	SPIH15A0-5A3N1
	2250	2475	1900	2782	3335	SPIH19A0-5A3N1

NoteFor filter and line reactor information, see **Page V6-T2-245**.

LCL Filters**LCL Filters for Active Front End (480V)**

Amps	Catalog Number
10	REG 10 5 0
18	REG 18 5 0
32	REG 32 5 0
48	REG 48 5 0
75	REG 75 5 0
110	REG 110 5 0
180	REG 180 5 0

Amps	Catalog Number
270	REG 270 5 0
410	REG 410 5 0
580	REG 580 5 0
840	REG 840 5 0
1160	REG 1160 5 0
1480	REG 1480 5 0

Line Reactor**Line Reactor for Non-Regenerative Front End (480/575VV)**

Amps	Watts Losses	Catalog Number
600	493	CHK600

LCL Filters for Active Front End (690V)

Amps	Catalog Number
14	REG 14 6 0
23	REG 23 6 0
35	REG 35 6 0
52	REG 52 6 0
85	REG 85 6 0
122	REG 122 6 0
185	REG 185 6 0

Amps	Catalog Number
287	REG 287 6 0
390	REG 390 6 0
460	REG 460 6 0
620	REG 620 6 0
780	REG 780 6 0
920	REG 920 6 0
1180	REG 1180 6 0

Options

9000X Series Option Board Kits


2

The 9000X Series drives can accommodate a wide selection of expander and adapter option boards to customize the drive for your application needs. The drive's control unit is designed to accept a total of five option boards.

The 9000X Series factory installed standard board configuration includes an A9 I/O board and an A2 relay output board, which are installed in slots A and B.

Option Boards

Option Board Kits



Option Kit Description ①	Allowed Slot Locations ②	Field Installed Catalog Number	Factory Installed Option Designator	SVX Ready Programs						
				Basic	Local/ Remote	Standard	MSS	PID	Multi-P.	PFC
Standard I/O Cards										
2 RO (NC-NO)	B	OPTA2	—	■	■	■	■	■	■	■
6 DI, 1 DO, 2 AI, 1 AO, 1 +10 Vdc ref, 2 ext +24 Vdc/EXT +24 Vdc	A	OPTA9	—	■	■	■	■	■	■	■
Extended I/O Cards										
2 RO, therm	B	OPTA3	A3	—	■	■	■	■	■	■
Encoder low volt +5V/15V/24V	C	OPTA4	A4	—	■	■	■	■	■	■
Encoder high volt +15V/24V	C	OPTA5	A5	—	■	■	■	■	■	■
Double encoder	C	OPTA7	A7	■	■	■	■	■	■	■
6 DI, 1 DO, 2 AI, 1 AO	A	OPTA8	A8	—	■	■	■	■	■	■
3 DI (encoder 10–24V), out +15V/+24V, 2 DO (pulse+direction)	C	OPTAE	AE	■	■	■	■	■	■	■
6 DI, 1 ext +24 Vdc/EXT +24 Vdc	B, C, D, E	OPTB1	B1	—	—	—	—	—	■	■
1 RO (NC-NO), 1 RO (NO), 1 therm	B, C, D, E	OPTB2	B2	—	—	—	—	—	■	■
1 AI (mA isolated), 2 AO (mA isolated), 1 ext +24 Vdc/EXT +24 Vdc	B, C, D, E	OPTB4	B4	—	■	■	■	■	■	■
3 RO (NO)	B, C, D, E	OPTB5	B5	—	—	—	—	—	■	■
1 ext +24 Vdc/EXT +24 Vdc, 3 Pt100	B, C, D, E	OPTB8	B8	—	—	—	—	—	—	—
1 RO (NO), 5 DI 42–240 Vac input	B, C, D, E	OPTB9	B9	—	—	—	—	—	■	■
SPI, absolute encoder	C	OPTBB	BB	—	—	—	—	—	—	—
Communication Cards ③										
Modbus	D, E	OPTC2	C2	■	■	■	■	■	■	■
Johnson Controls N2	D, E	OPTC2	CA	—	—	—	—	—	—	—
Modbus TCP	D, E	OPTCI	CI	■	■	■	■	■	■	■
BACnet	D, E	OPTCJ	CJ	■	■	■	■	■	■	■
Ethernet IP	D, E	OPTCK	CK	■	■	■	■	■	■	■
Profibus DP	D, E	OPTC3	C3	■	■	■	■	■	■	■
LonWorks	D, E	OPTC4	C4	■	■	■	■	■	■	■
Profibus DP (D9 connector)	D, E	OPTC5	C5	■	■	■	■	■	■	■
CanOpen (slave)	D, E	OPTC6	C6	■	■	■	■	■	■	■
DeviceNet	D, E	OPTC7	C7	■	■	■	■	■	■	■
Modbus (D9 type connector)	D, E	OPTC8	C8	■	■	■	■	■	■	■
Adapter	D, E	OPTD1	D1	■	■	■	■	■	■	■
Adapter	D, E	OPTD2	D2	■	■	■	■	■	■	■
RS-232 with D9 connection	D, E	OPTD3	D3	■	■	■	■	■	■	■
Keypad										
9000X Series local/remote keypad (replacement keypad)	—	KEYPAD-LOC/REM	—	—	—	—	—	—	—	■
9000X Series remote mount keypad unit (keypad not included, includes 10 ft cable, keypad holder, mounting hardware)	—	OPTRMT-KIT-9000X	—	—	—	—	—	—	—	—
9000X Series RS-232 cable, 13 ft	—	PP00104	—	—	—	—	—	—	—	—

Notes

① AI = Analog Input; AO = Analog Output; DI = Digital Input; DO = Digital Output; RO = Relay Output

② Option card must be installed in one of the slots listed for that card. Slot indicated in bold is the preferred location.

③ OPTC2 is a multi-protocol option card.

Technical Data and Specifications

SPA9000/SPN9000/SPI9000

Description	Specification
Supply Connection	
Input voltage U_{in} (AC) front end modules	380–500 Vac/525–690 Vac –10% to 10%
Input voltage U_{in} (DC) inverter	465–800 Vdc/640–1100 Vdc –0% to 0%, the waviness of the inverter supply voltage, formed in rectification of the electric network's alternating voltage in basic frequency, must be less than 50V peak-to-peak
Output voltage U_{out} (AC) inverter	$3 \sim 0 - U_{in}/1.4$
Output voltage U_{out} (DC) active front end module	$10.10 \times 1.35 \times U_{in}$ (factory default)
Output voltage U_{out} (DC) non-regenerative front end module	$1.35 \times U_{in}$
Ambient Conditions	
Ambient operating temperature	14 (no frost) to 122°F (–10 to 50°C): I_H 14 (no frost) to 104°F (–10 to 40°C): I_L
Storage temperature	–40 to 158°F (–40 to 70°C)
Relative humidity	0 to 95% RH, non-condensing, non-corrosive, no dripping water
Air quality	
Chemical vapors	IEC 721-3-3, unit in operation, class 3C2
Mechanical particles	IEC 721-3-3, unit in operation, class 3S2
Altitude	100% load capacity (no derating) up to 1000m 1% derating for each 100m above 1000m; max. 3000m
Vibration	5–150 Hz
EN50178/EN60068-2-6	Displacement amplitude 0.25 mm (peak) at 3–15.8 Hz Max acceleration amplitude 1G at 15.8–150 Hz
Shock	UPS Drop Test (for applicable UPS weights)
EN50178, EN60068-2-27	Storage and shipping: max 15G, 11 ms (in package)
Cooling capacity required	Approximately 2%
Cooling air required	FR4 41 cfm, FR6 250 cfm, FR7 250 cfm, FR8 383 cfm FI9 677 cfm, FI10 824 cfm, FI12 1648 cfm, FI13 2472 cfm
Unit enclosure class	FR4–FR7 NEMA Type 1/IP21; FR8, FI9–FI14 chassis (IP00)
EMC (at fault settings)	
Immunity	Fulfill all EMC immunity requirements
Safety	
Approvals	CE, UL, cUL, EN 61800-5-1 (2003), see unit nameplate for more detailed approvals
Control Connections	
Analog input voltage	0–10V, $R_i = 200$ kohms, (–10V to 10V joystick control) Resolution 0.1%, accuracy $\pm 1\%$
Analog input current	0(4)–20 mA, $R_i = 250$ ohms differential
Digital inputs	6, positive or negative logic; 18–30 Vdc
Auxiliary voltage	+24V, $\pm 15\%$, max. 250 mA
Output reference voltage	+10V, $+3\%$, max. load 10 mA
Analog output	0(4)–20 mA; RL max. 500 ohms; resolution 10 bits Accuracy $\pm 2\%$
Digital outputs	Open collector output, 50 mA/48V
Relay outputs	2 programmable change-over relay outputs Switching capacity: 24 Vdc/8A, 250 Vac/8A, 125 Vdc/0.4A Min. switching load: 5V/10 mA

SPA9000/SPN9000/SPI9000, continued

2

Description	Specification
Protections	
Overvoltage protection	480V/911 Vdc, 575V/1200 Vdc
Undervoltage protection	480V/333 Vdc, 575V/460 Vdc
Ground fault protection	In case of ground fault in motor or motor cable, only the inverter is protected
Motor phase supervision	Trips if any of the output phases is missing
Overcurrent protection	Yes
Unit overtemperature protection	Yes
Motor overload protection	Yes
Motor stall protection	Yes
Motor underload protection	Yes
Short circuit protection of 24V and 10V reference voltages	Yes

Input Fuses

SHT fuses can be assembled into same-size DIN fuse base.

SPA9000/SPN9000/SPI9000

Module Component	Frame	Bussman Fuse Type (aR)	Size	U _N (V)	I _N (A)	Qty.
Inverter Units						
SPI003A1-4	FR4	170M1560	0	690	20	2
SPI007A1-4	FR4	170M1562	0	690	63	2
SPI009A1-4	FR4	170M1562	0	690	63	2
SPI012A1-4	FR6	170M1565	0	690	63	2
SPI016A1-4	FR6	170M1565	0	690	63	2
SPI023A1-4	FR6	170M1565	0	690	63	2
SPI031A1-4	FR6	170M1567	0	690	100	2
SPI038A1-4	FR6	170M1567	0	690	100	2
SPI061A1-4	FR7	170M1570	0	690	200	2
SPI072A1-4	FR7	170M1570	0	690	200	2
SPI087A1-4	FR7	170M1571	0	690	250	2
SPI105A0-4	FR8	170M3819	DIN1	690	400	2
SPI140A0-4	FR8	170M3819	DIN1	690	400	2
SPI170A0-4	FR8	170M3819	DIN1	690	400	2
SPI205A0-4	FI9	170M6812	DIN3	690	800	2
SPI245A0-4	FI9	170M6812	DIN3	690	800	2
SPI300A0-4	FI10	170M8547	3SHT	690	1250	2
SPI385A0-4	FI10	170M8547	3SHT	690	1250	2
SPI460A0-4	FI10	170M8547	3SHT	690	1250	2
SPI520A0-4	FI12	170M8547	3SHT	690	1250	2 x 2
SPI590A0-4	FI12	170M8547	3SHT	690	1250	2 x 2
SPI650A0-4	FI12	170M8547	3SHT	690	1250	2 x 2
SPI730A0-4	FI12	170M8547	3SHT	690	1250	2 x 2
SPI820A0-4	FI12	170M8547	3SHT	690	1250	2 x 2
SPI920A0-4	FI12	170M8547	3SHT	690	1250	2 x 2
SPIH10A0-4	FI13	170M8547	3SHT	690	1250	6
SPIH11A0-4	FI13	170M8547	3SHT	690	1250	6
SPIH13A0-4	FI13	170M8547	3SHT	690	1250	6
SPIH16A0-4	FI14	170M8547	3SHT	690	1250	2 x 6
SPIH19A0-4	FI14	170M8547	3SHT	690	1250	2 x 6
SPIH23A0-4	FI14	170M8547	3SHT	690	1250	2 x 6


SHT fuses can be assembled into same-size DIN fuse base.

SPA9000/SPN9000/SPI9000, continued


Module Component	Frame	Bussman Fuse Type (aR)	Size	U_N (V)	I_N (A)	Qty.
Active Front Ends						
SPA205A0-4	FI9	170M6202	3SHT	1250	500	3
SPA385A0-4	FI10	170M6277	3SHT	1250	1000	3
SPA10A0-4	FI13	170M6277	3SHT	1250	1000	3 x 3
Non-Regenerative Front Ends						
SPN468A0-4	FI9	170M8547	3SHT	690	1250	3

Wiring Diagrams


SPA9000—Active Front End

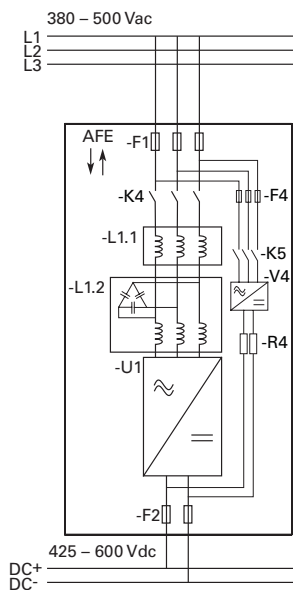


SPN9000—Non-Regenerative Front End

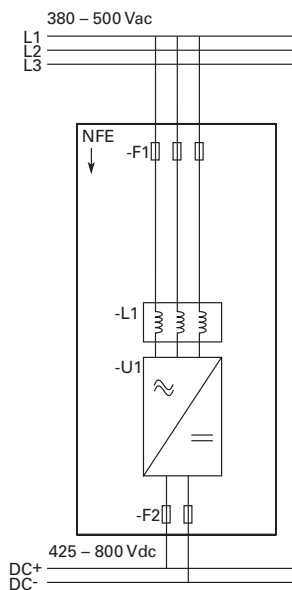

SPI9000—Inverter Unit (FR4–FR8)

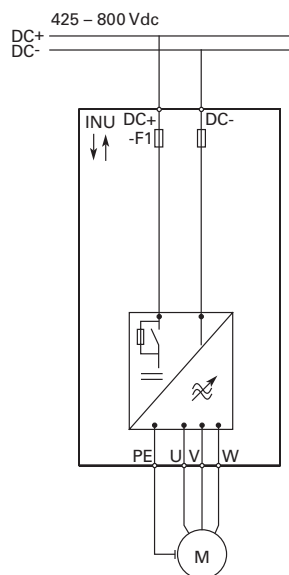

SPI9000—Inverter Unit (FI9–FI14)

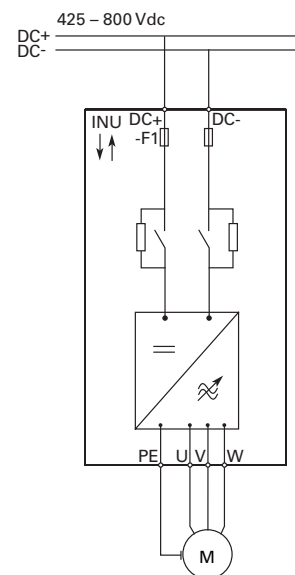

Dimensions

Approximate Dimensions in Inches (mm)

2

SPA9000/SPN9000/SPI9000

Frame	Height	Width	Depth	Weight Lbs (kg)
Active Front Ends				
FI9	40.6 (1030)	9.4 (239)	14.6 (372)	148 (67)
FI10	40.6 (1032)	9.4 (239)	21.7 (552)	220 (100)
FI12	40.6 (1032)	2 x 9.4 (2 x 239)	21.7 (552)	441 (200)
FI13	40.6 (1032)	27.9 (708)	21.8 (553)	674 (306)
FI14	40.6 (1032)	2 x 27.9 (2 x 708)	21.8 (553)	1348 (612)
Non-Regenerative Front Ends				
FI9	40.6 (1030)	9.4 (239)	14.6 (372)	148 (67)
Inverter Units				
FR4	11.5 (292)	5.0 (128)	7.5 (190)	11 (5)
FR6	20.4 (519)	7.7 (195)	9.3 (237)	35 (16)
FR7	23.3 (591)	9.3 (237)	10.1 (257)	64 (29)
FR8	29.8 (758)	11.4 (289)	13.5 (344)	106 (48)
FI9	40.6 (1030)	9.4 (239)	14.6 (372)	148 (67)
FI10	40.6 (1032)	9.4 (239)	21.7 (552)	220 (100)
FI12	40.6 (1032)	2 x 9.4 (2 x 239)	21.7 (552)	441 (200)
FI13	40.6 (1032)	27.9 (708)	21.8 (553)	674 (306)
FI14	40.6 (1032)	2 x 27.9 (2 x 708)	21.8 (553)	1348 (612)